


Home screen

PUQVPNCP module **WHMCS**

[Order now](#) | [Download](#) | [COMMUNITY](#) | [PUQVPNCP](#)

The product details page is the **Information** tab — the module's main client-facing view. Everything on it is loaded dynamically from the PUQVPNCP panel via AJAX the moment the page opens.

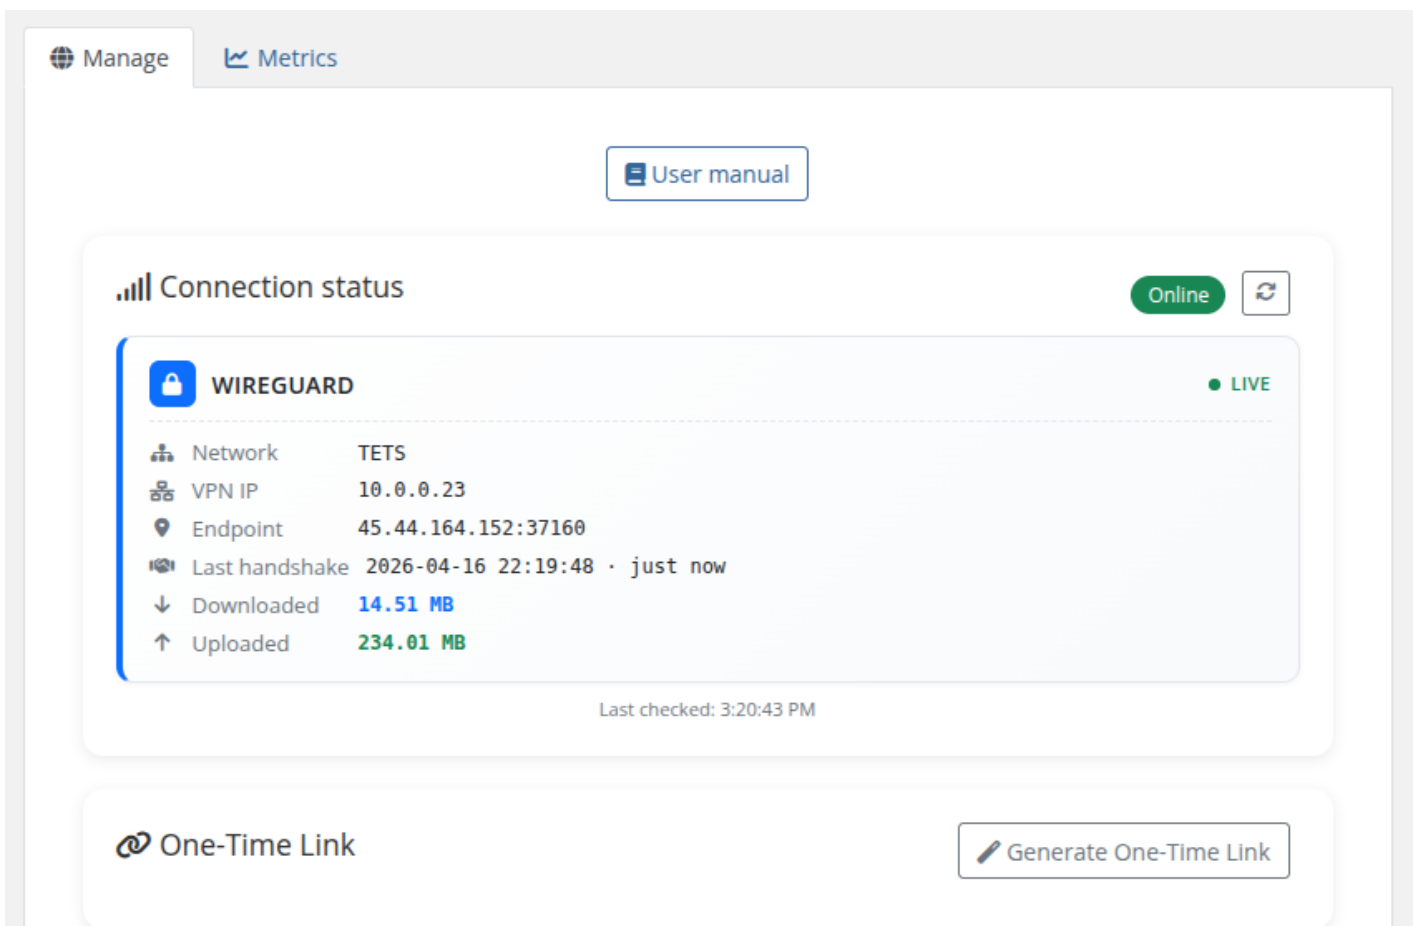


12-home-screen-connection.png

Sidebar

The module replaces the default *Information* sidebar entry with two of its own:

- **Information** — the page documented here.
- **Traffic statistics** — see [Traffic statistics](#).

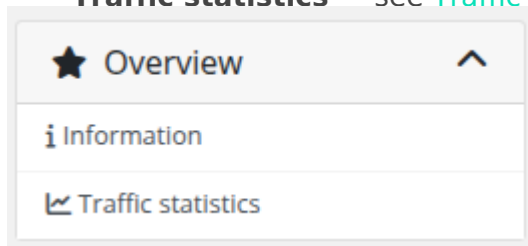

13-home-screen-sidebar.png

User manual

If a *Link to instruction* is set in the product configuration, a **User manual** button appears at the top of the page linking to that URL.

Connection status

A live block at the top of the page that polls `/api/v1/client/online` every 5 seconds (paused while the browser tab is hidden) and shows one card per protocol the client is currently connected on:

- **WireGuard** — blue accent, lock icon
- **OpenVPN** — amber accent, shield icon
- **IKEv2** — purple accent, key icon

Each card shows: VPN IP, network, endpoint, last handshake (with relative time suffix) and downloaded/uploaded bytes (humanised B/KB/MB/GB). The header pill is **Online** (green) when at least one protocol reports a session, **Offline** (red) otherwise.

A manual **Refresh** button next to the badge forces an immediate fetch.

One-Time Link (OTL)

A button that calls `POST /api/v1/client/{name}/otl` and displays a single-use self-service URL the customer can open once to configure their device without re-entering credentials.

One-Time Link

Generate One-Time Link

<https://dev.puqvpcncp.com/otl/f3b919d01a43e38efec66269a430aaa865146466f04979f74727f540542>

This link expires after the first use.

14-home-screen-otl.png

“ The link expires after the first use. The endpoint is POST-only — opening the URL by accident in a browser tab does not consume the token.

VPN Client

Static card with the panel's authoritative client record:

VPN Client

Enabled

Client name: vpn-1-5547-ifxt

VPN IP Address: 10.0.0.23

Username: user_1831

Password: \$%HTW4H2a3

Download limit: 3 Mbit/s

Upload limit: 5 Mbit/s

Protocols: WireGuard OpenVPN IKEv2

15-home-screen-vpn-client.png

- **Client name** — the identifier on the panel
- **VPN IP Address** — assigned IPv4
- **Username** — auth username (used by IKEv2 / OpenVPN)
- **Password** — auth password (shown as `<code>`)
- **Download / Upload limit** — Mbit/s caps or *Unlimited*
- **Protocols** — coloured badges for WireGuard / OpenVPN / IKEv2; only protocols actually enabled on the client's network are shown

A status pill in the top-right reads **Enabled** (green) when the panel reports `status: enable`, **Disabled** (red) otherwise.

WireGuard

Shown when WireGuard is enabled on the client's network:

```
[Interface]
Address = 10.0.0.23/24
DNS = 10.0.0.1, 77.87.125.200
MTU = 1420
PrivateKey = KE39V3y13rf11eZ0Rzo5/7b8FezhERAtSY+FdI

[Peer]
PersistentKeepalive = 25
Endpoint = dev.puqvpncp.com:51823
PublicKey = ZLN9mopWyV94HS6mRrr4riT6VwehPAdKMnvXg1J
AllowedIPs = 0.0.0.0/0
```

16-home-screen-wireguard.png

- `.conf` text in a monospace block with **Copy Config** and **Download** buttons
- QR code generated by the panel (click to enlarge in a lightbox; close with the × button or `Esc`)

OpenVPN

Shown when OpenVPN is enabled on the client's network:



17-home-screen-openvpn.png

The full `.ovpn` profile text with **Copy Config** and **Download** buttons.

IKEv2

Shown when IKEv2 is enabled on the client's network:

