

# Jellyfin Family

## WISECP module

This module enables your company to offer public media services to customers through Jellyfin accounts. It facilitates the creation of customer accounts on a pre-configured Jellyfin server, allowing for the sale of various media packages at different prices. Moreover, it includes the functionality to add multiple media accounts for a single service. This feature enables customers to manage multiple Jellyfin accounts under one subscription. The module requires a pre-installed Jellyfin server and uses the Jellyfin API for client account management. It also supports multiple languages. Administrators can suspend, terminate, or unsuspend users, change user passwords, and more, while clients can manage their devices and libraries.

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
  - [Setup \(install/update\)](#)
  - [License Activation](#)
  - [Setup guide: Jellyfin setup](#)
  - [Add server \(Jellyfin server\)](#)
  - [Service configuration](#)
  - [Add new library/item in Jellyfin](#)
  - [Getting Access Hash \(API key\)](#)
- [Client Area](#)
  - [Product Home Screen](#)
  - [Add Media Account](#)
  - [Management Media account](#)
- [Admin Area](#)

- Order Detail

# Description

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Thanks to the module, the company is able to offer public media services to its customers based on Jellyfin accounts.

The module is used to create customer accounts on the previously prepared Jellyfin server. The module enables You to define multiple public media packages and sell them at different prices. The module creates a customer account according to the selected package. The client can have many independent accounts in the media. Now, it empowers users to define and manage multiple media accounts, allowing for more tailored offerings and increased customer satisfaction.

For the correct operation of the module, a pre-prepared Jellyfin installation is required (the module does not assist in the installation of the Jellyfin server and assumes that such installation is ready for operation through API.) Module use Jellyfin API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Jellyfin server, including all installation steps such as PHP, Jellyfin, SSL certificates etc.

### **Requirements:**

WISECP: v3.1.5+, php: v8.x, Ioncube: V12+  
Jellyfin: v10+

## Functions:

- Auto create and deploy client account
- Multi-Account Support: Enable users to manage multiple media accounts within a single service
- The module uses only the API to manage the accounts

- Module supports multilingualism (**Arabic, Bosnian, Czech, German, Greek, English, Spanish, Persian, French, Hungarian, Indonesian, Italian, Georgian, Latvian, Dutch, Polish, Portuguese, Romanian, Ukrainian**)
- The module shows all user info: enabled user libraries, active devices etc.
- Link to instructions for setting up the service in the client area.

## Available options in the admin panel:

- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- Drop all devices
- Unblock user
- API connection status
- List of active devices
- List of enabled user libraries
- List of Media Accounts

## Available options in the client panel:

- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password
- Add/Management/Delete Media Account
- Drop Account Devices
- List of Media Accounts

Screenshot of the Client area



Details

Additional Services

Upgrade

Cancellation Request

Order ID  
#196



Renew Now

General Information		Invoice #361
Service Group	Media	
Service Name	Jellyfin Family	
Services Status	Active	
Payment Period	Monthly	
Renewed On	23.09.2024	
Next Due Date	23.10.2024	
Amount : 47,68zł		

Web interface

Drop All Devices

Unblock User

Management Media User

Username

jelly-4-196-family

Status

Enable

Password

.....

Save

Libraries

Clips

Movies

Failed Login Attempt

0/3

Active Devices

10

Show Record

Search

Device Name	App Name	Last Activity
No data available in table		

No Records

Prev

Next

Streaming bitrate limit

30 Mbps

Sync Play Access

Allow user to create and join groups

Media Accounts

Count of Media Account: 1 / 20

Add Media Account

# Screenshot of the Admin area

Jellyfin Family Order Detail

Dashboard / Orders / Jellyfin Family Order Detail

Detail

Core

Cancellation / Refund

Blocks

Order Addons

Requirements

Upgrade / Downgrade

History

API Module

PUQ Jellyfin Family

Drop All Devices

Unlock User

API answer OK

Username: jelly-4-196-family Is Disabled : NO

Clips

Movies

Active Devices	Streaming bitrate limit	Active Sessions	Failed Login Attempt	Sync Play Access
0	30 Mbps	0/0	0/3	Allow user to create and join groups

Device Name	App Name	Last Activity
Enabled	Username	Enabled Libraries
✓	jelly-4-196-family-test	<div>Movies</div>

Usernamejelly-4-196-familyPassword123123123ServerJelly Fam

Overwrite package settings

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

To apply the changes on the server, it is necessary to check this checkbox.

Update

# Changelog

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

v1.0 Released 21-10-2023

First version



# Installation and configuration guide

# Setup (install/update)

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

### 1. Download the latest version of the module.

php 8.1

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Jellyfin-Family/php81/PUQ_WISECP-Jellyfin-Family-latest.zip
```

php 8.2

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Jellyfin-Family/php82/PUQ_WISECP-Jellyfin-Family-latest.zip
```

All versions are available: [https://download.puqcloud.com/WISECP/Product/PUQ\\_WISECP-Jellyfin-Family/](https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Jellyfin-Family/)

### 2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Jellyfin-Family-latest.zip
```

### 3. Copy and Replace "puqJellyfinFamily" from "PUQ\_WISECP-Jellyfin-

Family" to "WISECP\_WEB\_DIR/coremio/modules/Product/"



# License Activation

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Jellyfin Family

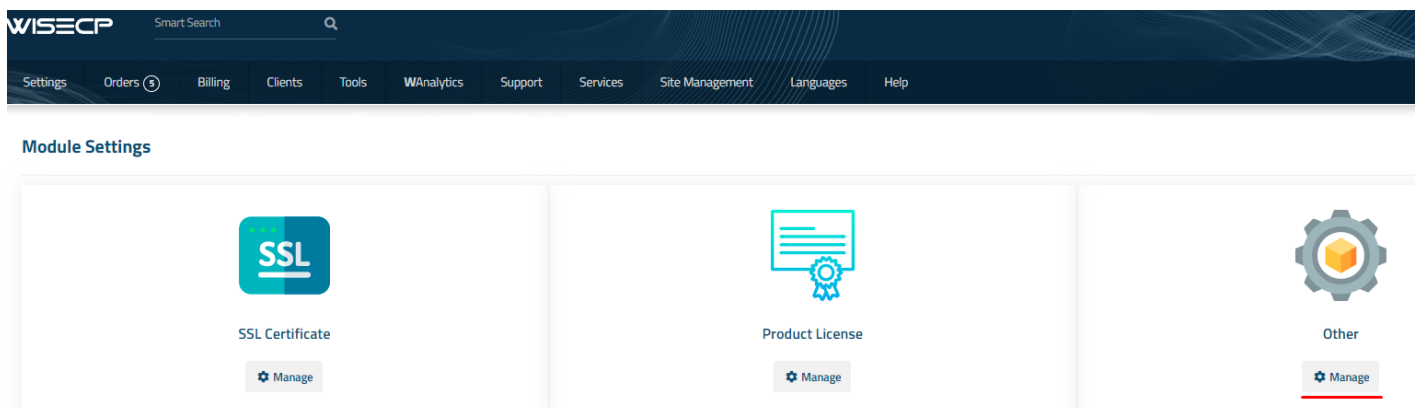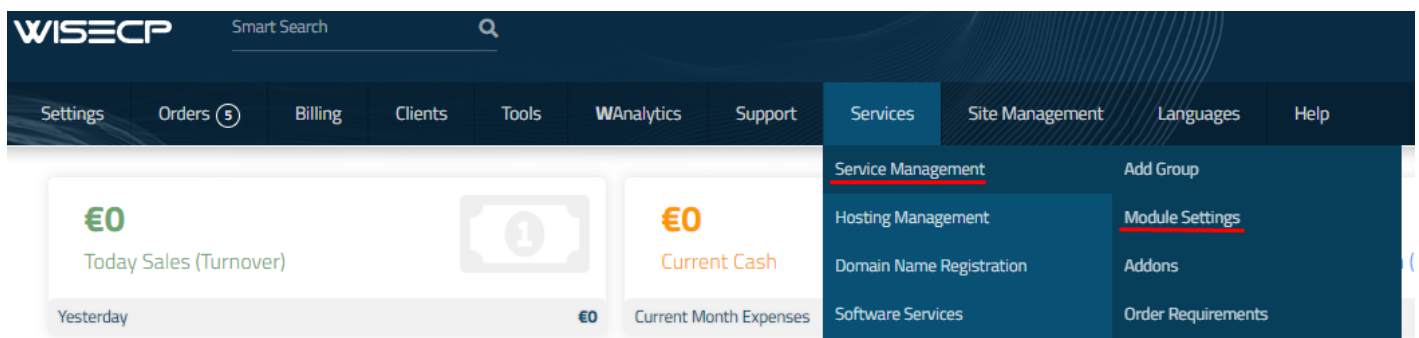



Other



Initial Settings



All Modules



Initial Settings



All Modules

Search Within Modules

Write something...



			PUQ Jellyfin Family

If you cannot find the module you are looking for here, it may be available in our Marketplace.



Initial Settings



All Modules

PUQ Jellyfin Family



License key



2024-11-09T13:54:13+01:00



Check and Save

Version: 1.0



Web Site



Documentation



Changelog



Add New Server



Server Groups

# Setup guide: Jellyfin setup

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### 1. Install Jellyfin on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Jellyfin. All you need to do is run this command on your system

```
wget -O- https://repo.jellyfin.org/install-debuntu.sh | sudo bash
```

### 2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d  
DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload  
nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

### 3. Configure nginx from a subdomain

Create a file named jellyfin.conf.

```
cd /etc/nginx/conf.d/  
nano jellyfin.conf
```

Then, insert the following text, replacing **DOMAIN\_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate
server {
    listen 80;
    listen [::]:80;
    server_name DOMAIN_NAME;

    # Uncomment to redirect HTTP to HTTPS
    return 301 https://$host$request_uri;
}

server {
    listen 443 ssl http2;
    listen [::]:443 ssl http2;
    server_name DOMAIN_NAME;

    ## The default `client_max_body_size` is 1M, this might not be enough for some posters, etc.
    client_max_body_size 20M;

    # use a variable to store the upstream proxy
    # in this example we are using a hostname which is resolved via DNS
    # (if you aren't using DNS remove the resolver line and change the variable to point to an IP
    address e.g `set $jellyfin 127.0.0.1`)
    set $jellyfin 127.0.0.1;
    resolver 127.0.0.1 valid=30;

    ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;
    include /etc/letsencrypt/options-ssl-nginx.conf;
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;
    add_header Strict-Transport-Security "max-age=31536000" always;
    ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;
    ssl_stapling on;
    ssl_stapling_verify on;

    # Security / XSS Mitigation Headers
    # NOTE: X-Frame-Options may cause issues with the webOS app
    add_header X-Frame-Options "SAMEORIGIN";
    add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
```

```

add_header X-Content-Type-Options "nosniff";

# COOP/COEP. Disable if you use external plugins/images/assets
add_header Cross-Origin-Opener-Policy "same-origin" always;
add_header Cross-Origin-Embedder-Policy "require-corp" always;
add_header Cross-Origin-Resource-Policy "same-origin" always;

# Permissions policy. May cause issues on some clients
add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()" always;

# Tell browsers to use per-origin process isolation
add_header Origin-Agent-Cluster "?1" always;

# Content Security Policy
# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
# Enforces https content and restricts JS/CSS to origin
# External Javascript (such as cast_sender.js for Chromecast) must be whitelisted.
# NOTE: The default CSP headers may cause issues with the webOS app
#add_header Content-Security-Policy "default-src https: data: blob: http://image.tmdb.org;
style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline' https://www.gstatic.com
https://www.youtube.com blob:; worker-src 'self' blob:; connect-src 'self'; object-src
'none'; frame-ancestors 'self'";

location = / {
    return 302 http://$host/web/;
    #return 302 https://$host/web/;
}

location / {
    # Proxy main Jellyfin traffic
    proxy_pass http://$jellyfin:8096;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;

```



```

    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;

    # Disable buffering when the nginx proxy gets very resource heavy upon streaming
    proxy_buffering off;
}

# location block for /web - This is purely for aesthetics so /web/# / works instead of having
to go to /web/index.html/# /
location = /web/ {
    # Proxy main Jellyfin traffic
    proxy_pass http://$jellyfin:8096/web/index.html;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}

location /socket {
    # Proxy Jellyfin Websockets traffic
    proxy_pass http://$jellyfin:8096;
    proxy_http_version 1.1;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection "upgrade";
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}
}

```

## Restarting nginx

```
sudo service nginx restart
```



# Add server (Jellyfin server)

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Jellyfin

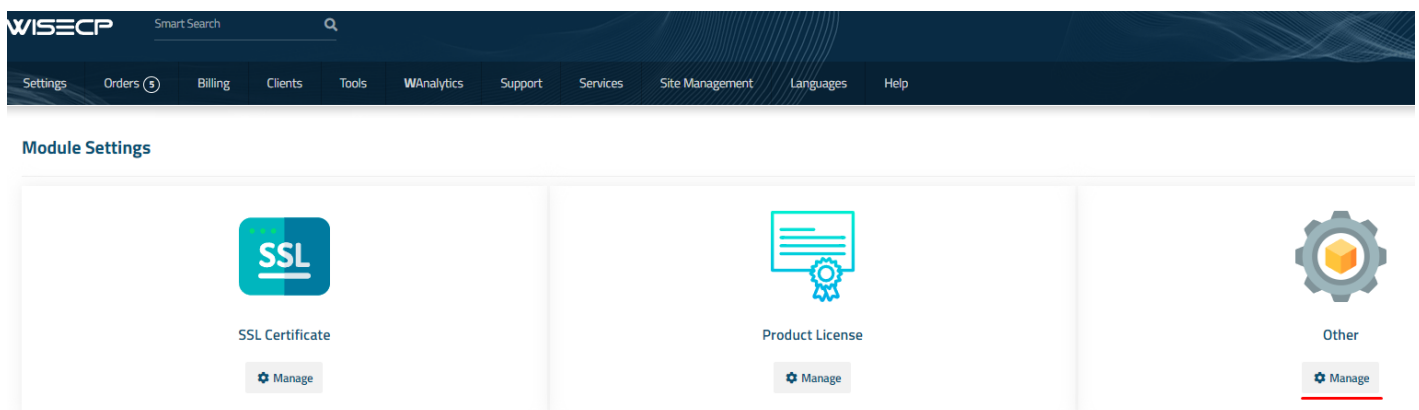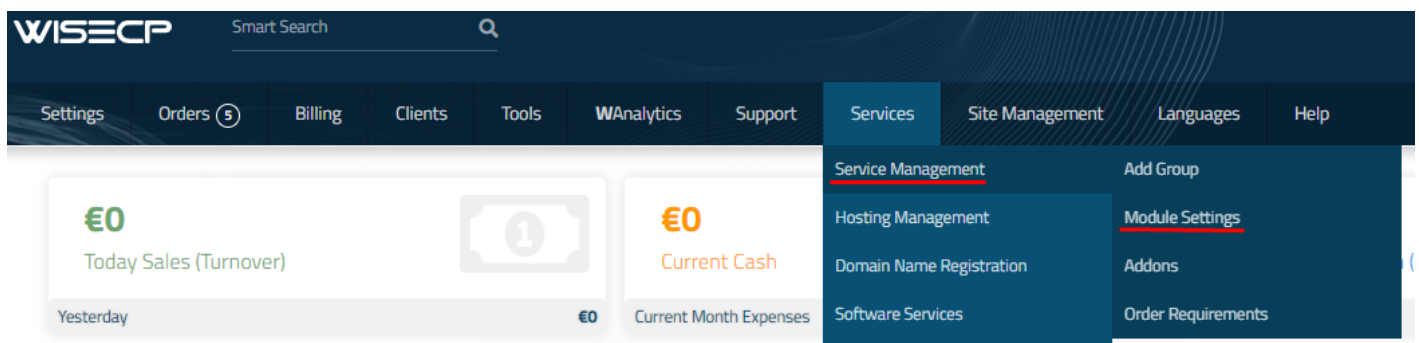

Other

- Initial Settings
- All Modules

Other

- Initial Settings
- All Modules

Search Within Modules

Write something... Q

			PUQ Jellyfin Family

If you cannot find the module you are looking for here, it may be available in our Marketplace.

3. In the opened page, click the 'Add Server' button.

Other

- Initial Settings
- All Modules

PUQ Jellyfin Family



License key

[Redacted]



2024-11-09T13:54:13+01:00



Check and Save

Version: 1.0



Web Site



Documentation



Changelog



Add New Server



Server Groups

#### 4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Emby server you are connecting to.
- **Username:** is the username for the account on [Jellyfin](#).
- **Password:** is the password for the account on [Jellyfin](#).
- **Access Hash:** API key that you created in the previous step on the Emby server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

## PUQ Jellyfin Family

[Go to Back](#)

## Add New Server

Name	Jellyfin Family
Maximum Number of Accounts	100
Server Group	Default <span>▼</span>
Default	<input type="checkbox"/> Set as default server in group
IP Address or Domain	jellyfin-test.uuq.pl
Username	admin
Password	
Access Hash	
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	<span>⚙️</span>   Test Connection

✓ Connection test Successful ✕

Add New Server

# Service configuration

## Jellyfin Family module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.
2. Create New Service Group

Go to

Services -> Service Management -> Add Group

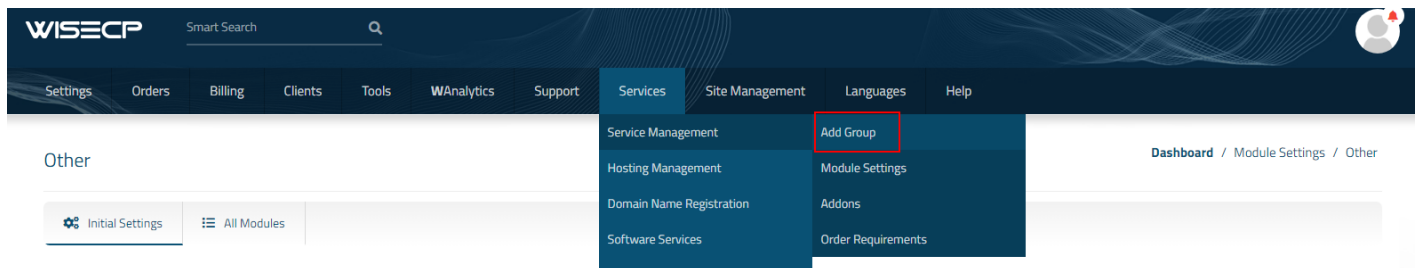

Enter all the necessary data and click the **'Create Group'** button.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

Create New Service Group

Dashboard / Create New Service Group

Create a new service group, you can also create new categories and manage the existing one from here.

ENUKRURDPTPLNLLVKAITIDHUFRAESLEDECSBSAR

Title

Media

Short Detail

Short Group Description

Listing Template

☒ Box List ☐ Horizontal List

Status

Enable

Background Image

(optional)

Group Colour

#FFFFFF

Order Upgrades

☐ Allow clients to upgrade to higher package in the same service group

External HTML Code

Paste your HTML code to this field (Optional)

You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty

### 3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

€0

Today Sales (Turnover)

Yesterday

€0

€0

Current Cash

Current Month Expenses

€0

0

Overdue Invoice (Total €0)

Payment Date Upcoming (Total €0 / Last 7 Days)

0

Client Registration (Today)

Yesterday

0

0

Pending Support Tickets

Total Resolved

0

0

Order in the Process (Total €0)

0

Reminder (Will Happen Today)

Service Management

Hosting Management

Domain Name Registration

Software Services

International SMS Services

Google SEO Services

VPN

Media

In the opened window, click the **'Create New Service'** button.

**WISECP** Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

**Media** [Media](#)

[+ Create New Service](#) [Categories](#) [Service Group Settings](#) [Delete Group](#)

Apply to selected

10  Show Record

<input type="checkbox"/>	Service	Category	Amount	Status

On the opened page, enter all the necessary details for your new service and navigate to the '**Core**' tab.

Select the '**PUQ Jellyfin Family**' module from the drop-down list of modules.

**Add Service Pack For Media** [Dashboard](#) / [Media](#) / [Add Service Product](#)

[Detail](#) [Core](#) [+ Optional Addons](#) [Requirements](#) [Upgradeable Products](#) [Pricing](#)

Module

Server Group	Default (Servers: 1)	Use All Libraries	<input type="checkbox"/> select all libraries together
Username prefix	jelly-	Libraries	Movie
Username suffix	-family	Streaming bitrate limit	50
SyncPlay access	Allow user to create and join groups	User sessions	3
Failed login attempts	3	Remote control	<input type="checkbox"/> Remote control of shared devices
Media downloads	<input checked="" type="checkbox"/> Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.	Allow Playback Media	<input checked="" type="checkbox"/>
Allow Playback Audio	<input checked="" type="checkbox"/> audio that requires transcoding	Allow Playback Video	<input type="checkbox"/> video that requires transcoding
Allow Playback Video	<input type="checkbox"/> video that requires conversion without re-encoding	Allow Live TV access	<input type="checkbox"/>
Allow Live TV recording management	<input type="checkbox"/>	Force transcoding of remote media sources such as Live TV	<input type="checkbox"/>
Count Of Media Accounts	20	Link to instruction	https://doc.puq.info/books/jellyfin-family-wisecp-module
Automatic Setup		<input type="checkbox"/> Please activate for automatic installation of the order. Otherwise, administrator approval is required.	

[Create Product](#)

4. Fill in the configuration options according to your preferences.



## Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.  
**(IMPORTANT! Start a new line for each new library)**

Example:

"Movies

Beginner`s Programming Course

Comedy"

### **IMPORTANT!**

If you have a folder named "-", please enter it not as the first one or rename it.

If you don't want any folder to be accessible, type "-".

## User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **SyncPlay access:** The SyncPlay feature enables to sync playback with other devices. Select the level of access this user has to the SyncPlay
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **User sessions:** Set the maximum number of simultaneous user sessions.  
A value of 0 will disable the feature.
- **Failed login attempts:** Determine how many incorrect login tries can be made before lockout occurs.  
A value of zero means inheriting the default of three tries for normal users and five for administrators. Setting this to -1 will disable the feature.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client\_id>-<service\_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

## Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

## Media Accounts Configuration:

- **Count of media accounts:** Available number of media accounts for creation by user.

## Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area

# Add new library/item in Jellyfin

Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

## New library:

To create a new library, you should to **create a folder** in your jellyfin server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```


**LIBRARY\_NAME** - The name of the new library.


After creating a folder, let's create a library in Jellyfin:

Add a new library:

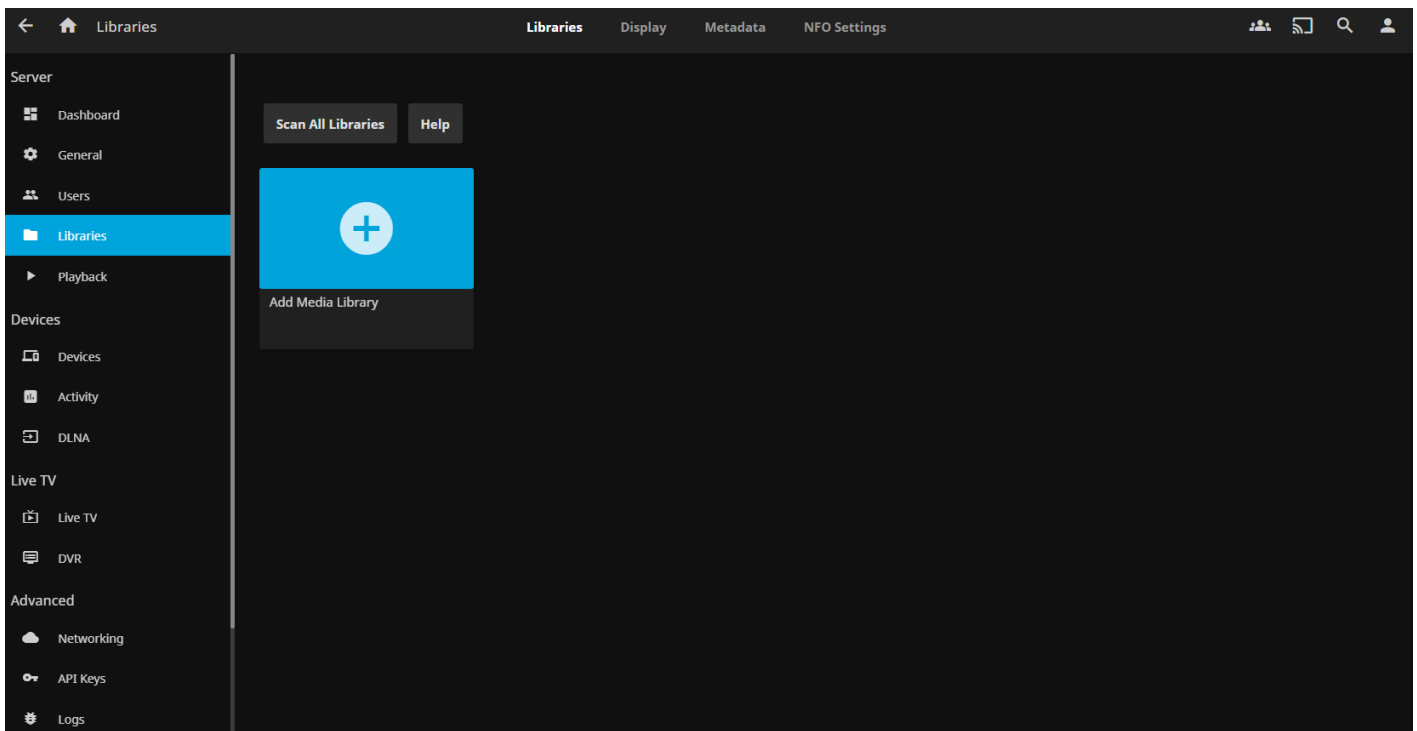

Assign the appropriate folder to this library:

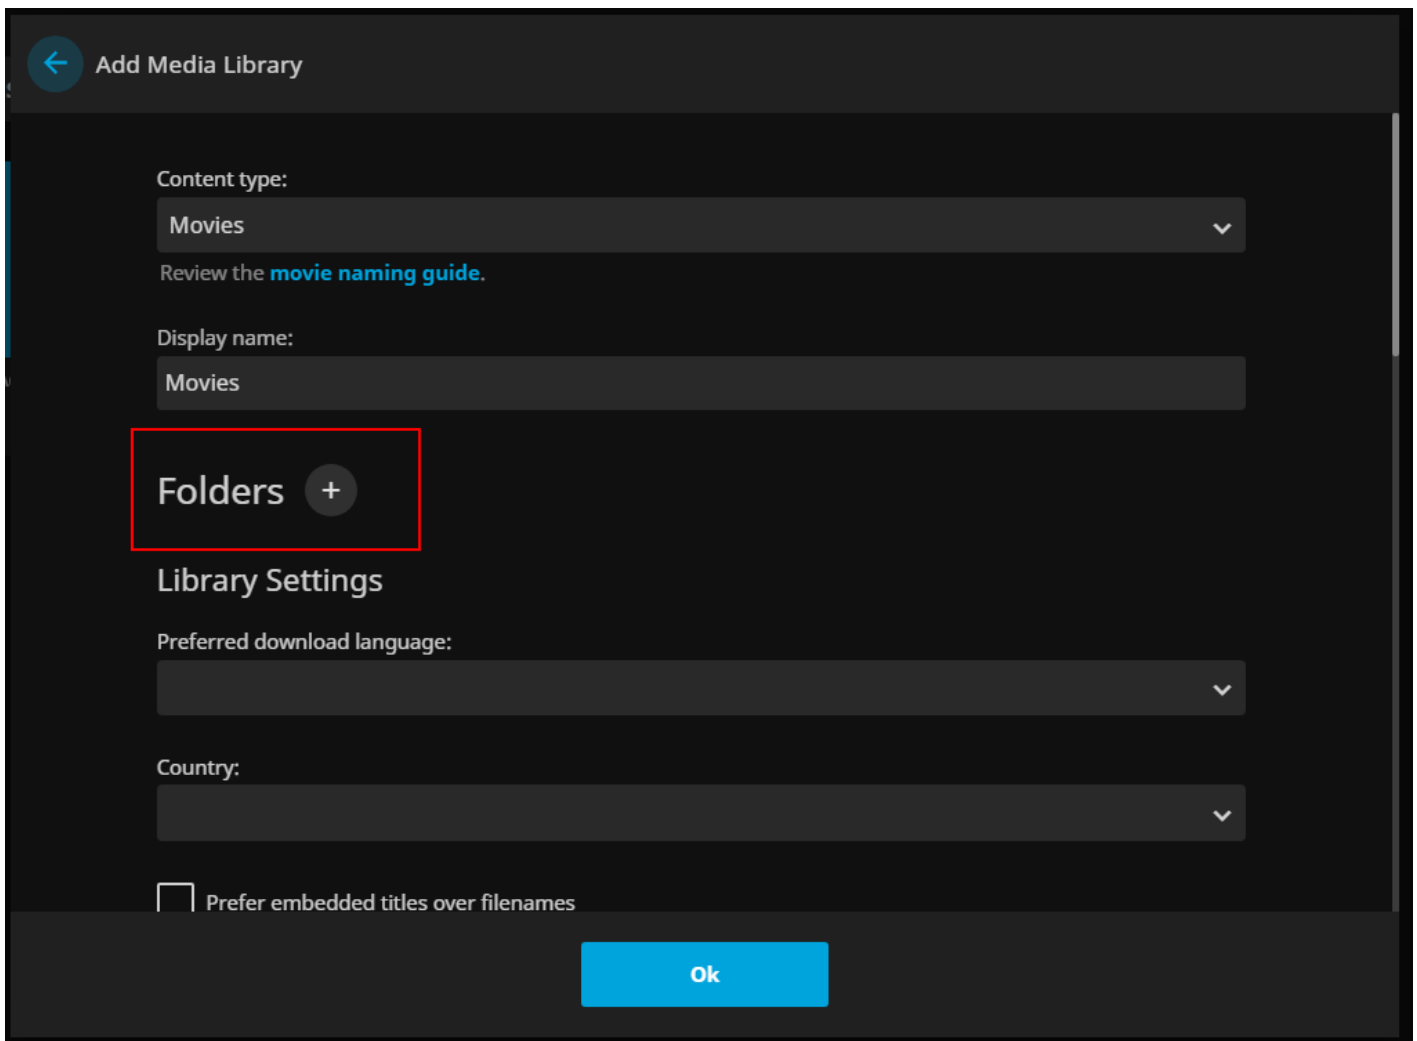

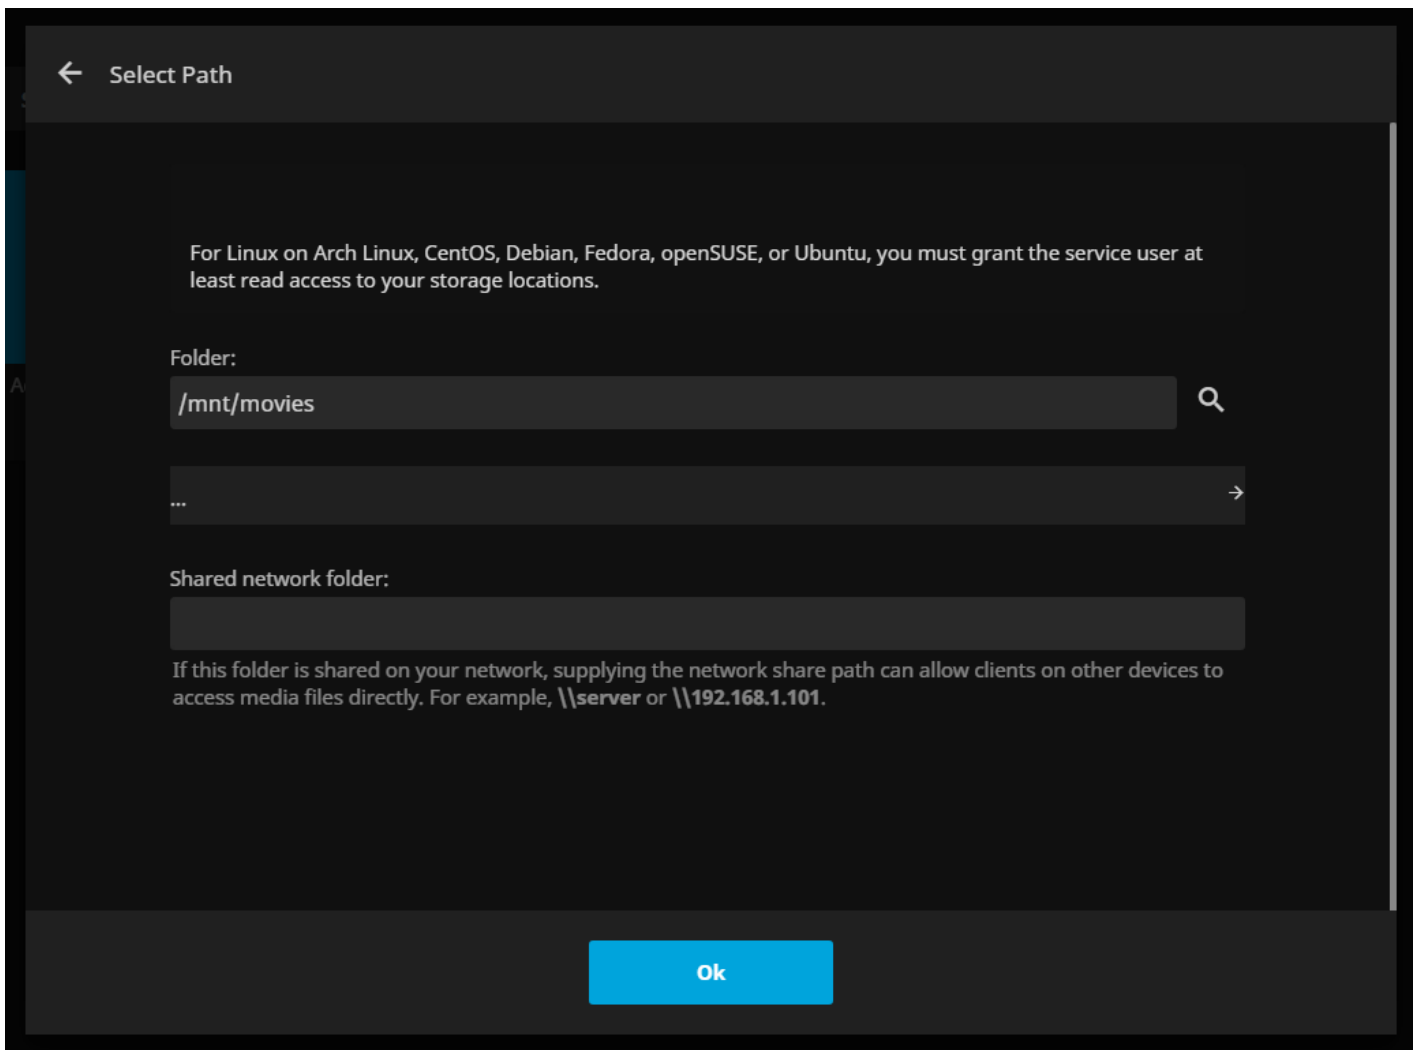

## New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```


```
wget DOWNLOAD_ITEM_URL
```

**LIBRARY\_NAME** - The name of the library.

**DOWNLOAD\_ITEM\_URL** - The download URL of the item you want to upload to the server.

# After all

Scan all libraries by clicking on the "Scan All Libraries" button. To scan a specific library, click on the three dots and select "Scan Library".

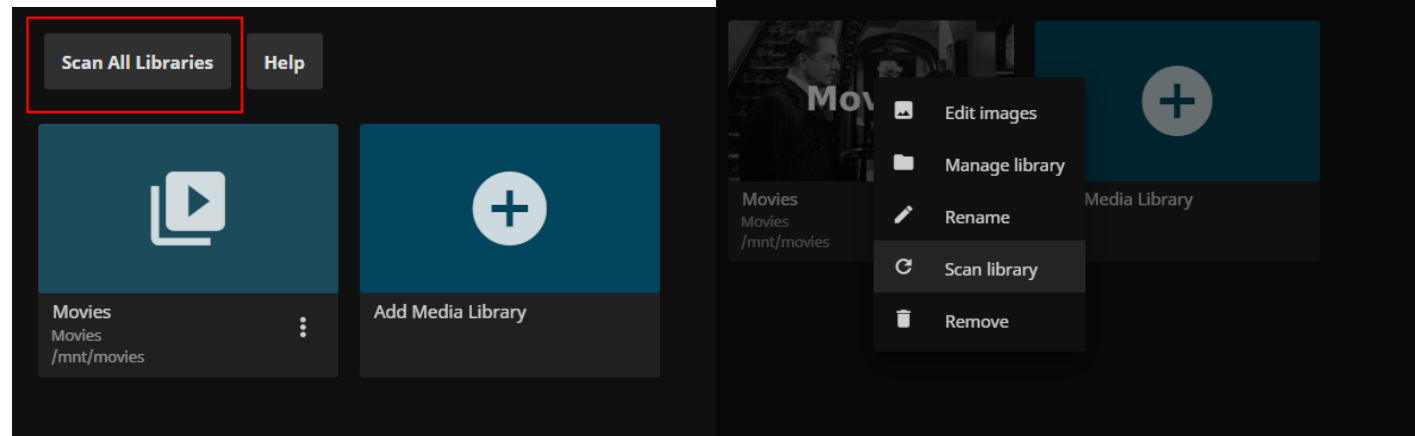


# Getting Access Hash (API key)

Jellyfin Family module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys


## Create a new API Key

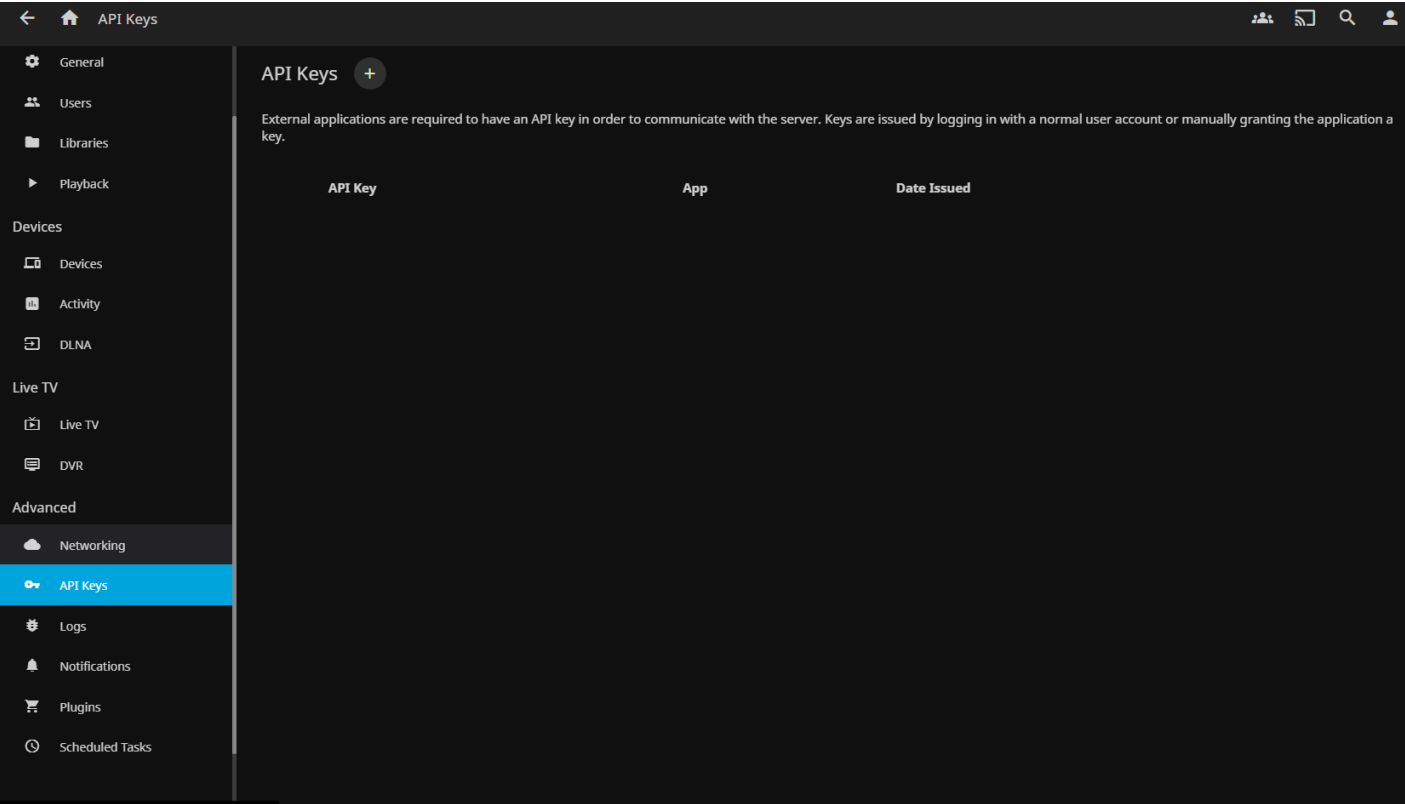

## Whrite an App Name

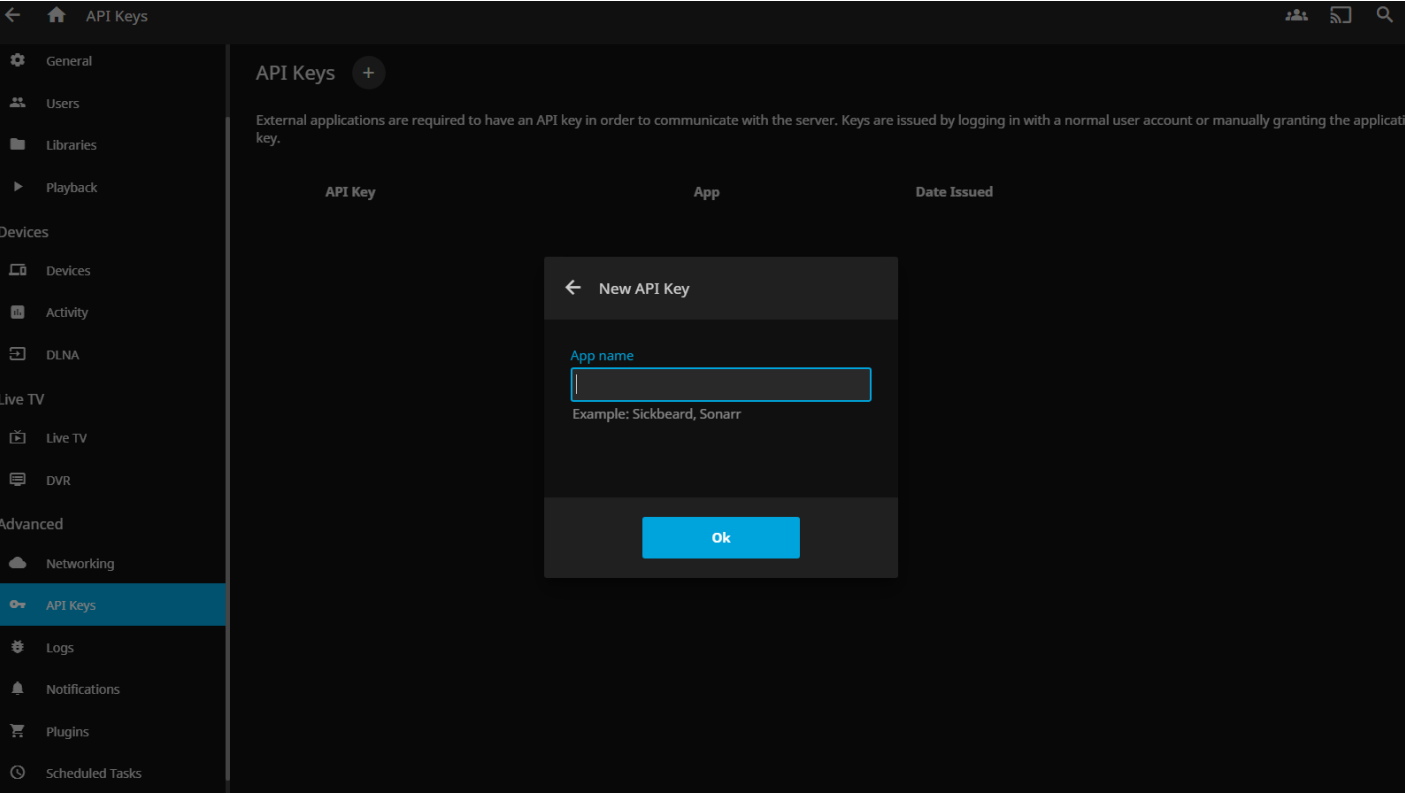

Now you can getting an API key

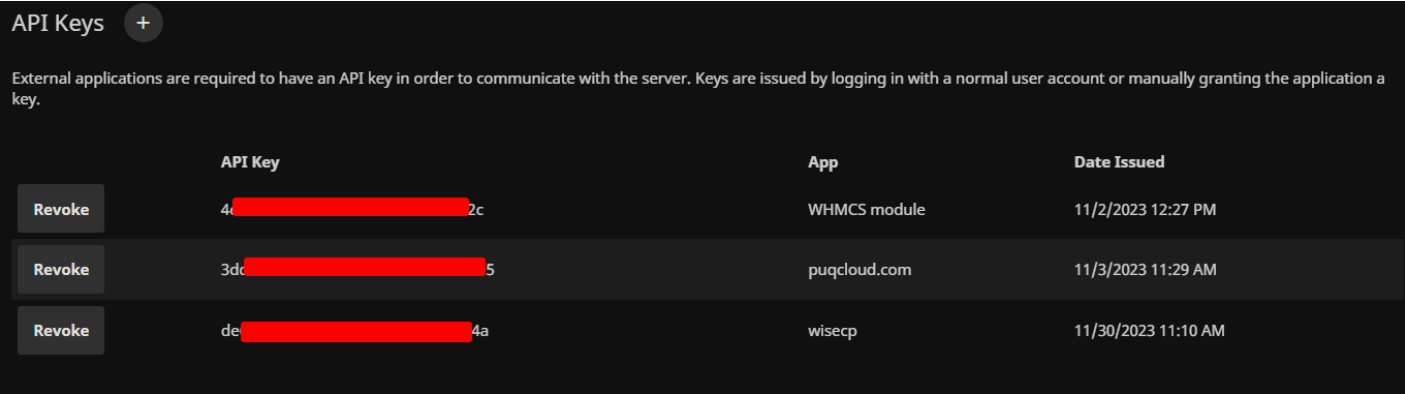



# Client Area

# Product Home Screen

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

The end customer, after logging in to his own customer panel, has access to the following information and options

- Link to the user manual (which was defined by the administrator when setting up the service.).
- Jellyfin server address
- Authorization data
- User informations
- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password
- Add/Management/Delete Media Account
- Drop Account Devices
- List of Media Accounts

Screenshot of the client area



Details

Additional Services

Upgrade

Cancellation Request

Order ID  
#196



Renew Now

General Information		Invoice #361
Service Group	Media	
Service Name	Jellyfin Family	
Services Status	Active	
Payment Period	Monthly	
Renewed On	23.09.2024	
Next Due Date	23.10.2024	
Amount : 47,68zł		

Web interface

Drop All Devices

Unblock User

Management Media User

Username

jelly-4-196-family

Status

Enable

Password

.....

Save

Libraries

Clips

Movies

Failed Login Attempt

0/3

Active Devices

10

Show Record

Search

Device Name	App Name	Last Activity
No data available in table		

No Records

Prev

Next

Streaming bitrate limit

30 Mbps

Sync Play Access

Allow user to create and join groups

Media Accounts

Count of Media Account: 1 / 20

Add Media Account



# Add Media Account

Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Add Media Account

Username

4-187- test

Password

.....

Disable libraries:

Movies

Cartoons

Sport

Movies

Books & Documentaries

Add

**Username** - Set a media account username. It consists of the username of the main account and a unique name for this media account.

**Password** - Write a password for registering the media account, or generate one by clicking Generate.

**Disable libraries** - Here are all the libraries available to the main account. If you want to restrict access for this media account to any of the libraries, simply select that library.

Press **Ctrl** to select multiple libraries.

Press **Shift** to select all libraries.

# Management Media account

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Turn Back

Edit Media Account

Enabled:

☒

Username

jelly-4-196-family-test

Password

.....

Disable libraries:

Clips

Movies

Delete Media account

Save

Account Active Devices

Device Name	App Name	Last Activity
Chrome	Jellyfin Web	2024-10-10T12:36:11.9127472Z

Drop Account Devices

- Enabled** - Update account status.
- Username** - Set a media account username. It consists of the username of the main account and a unique name for this media account.
- Password** - Write a password for registering the media account.
- Disable libraries** - Here are all the libraries available to the main account. If you want to restrict

access for this media account to any of the libraries, simply select that library.

Press **Ctrl** to select multiple libraries.  
Press **Shift+Ctrl** from top to bottom of list to select all libraries.

## Media account active devices

Here is a list of active devices for this account.

Press "Drop Account Devices" to sign out from the devices.

Account Active Devices

Device Name	App Name	Last Activity
Chrome	Jellyfin Web	2024-10-10T12:36:11.9127472Z

Drop Account Devices



# Admin Area

# Order Detail

## Jellyfin Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Navigate to the service you want to manage, then go to the '**Core**' tab.

Jellyfin Family Order Detail

Dashboard / Orders / Jellyfin Family Order Detail

i

Detail

⚙️

Core

📺

Blocks

+

Order Addons

☑️

Requirements

➕

Upgrade / Downgrade

🕒

History

➕

Cancellation / Refund

API Module

PUQ Jellyfin Family

▼

🗑️ Drop All Devices

🔒 Unblock User

✔️ API answer OK

Username: jelly-4-196-family Is Disabled : NO

Clips

Movies

Active Devices	Streaming bitrate limit	Active Sessions	Failed Login Attempt	Sync Play Access
0	30 Mbps	0/0	0/3	Allow user to create and join groups

Device Name	App Name	Last Activity
Enabled	Username	Enabled Libraries
✔️	jelly-4-196-family-test	<div>Movies</div>

Usernamejelly-4-196-familyPassword123123123ServerJelly Fam▼

Overwrite package settings☐

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server☐

To apply the changes on the server, it is necessary to check this checkbox.

Update

In the opened tab, you have a view of the online status of the service. The available online information includes:

- Connection status to the API
- Information about the Jellyfin account on the **Jellyfin** server
- Information about the account

Also, below are fields with the client's personal data.

You can also individually override package options for the client by checking the '**Overwrite package settings**' box.

After modifying the configuration options, check the '**Send changes to server**' box to save the data to the Jellyfin server.

Username

jelly-4-196-family

Password

123123123

Server

Jelly Fam

Server Group

Default (Servers: 1)

Use All Libraries

☐ select all libraries together

Username prefix

jelly-

Will be attached to the beginning of username. Only small letters and numbers and symbol "-"

Libraries

Movies

Clips

IMPORTANT! Before writing any libraries here, read the instructions!

Username suffix

-family

Will be appended to the end of username. Only small letters and numbers and symbol "-"

Streaming bitrate limit

30

Mbps. Please provide number from 1 to 60

SyncPlay access

Allow user to create and join groups

Sync playback with other devices

User sessions

0

A value of 0 will disable the feature.

Failed login attempts

before user is locked out. Setting this to -1 will disable the feature

Remote control

☐ Remote control of shared devices

Media downloads

☒ Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.

Allow Playback Media

☐

Allow Playback Audio

☒ audio that requires transcoding

Allow Playback Video

☐ video that requires transcoding

Allow Playback Video

☒ video that requires conversion without re-encoding

Allow Live TV access

☐

Allow Live TV recording management

☒

Force transcoding of remote media sources such as Live TV

☐

Count Of Media Accounts

20

Available number of media accounts for creation by user

Link to instruction

https://\*\*\*\*\*.\*/

A link to the instruction will be reflected in the client area.

Overwrite package settings

☒ Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐ To apply the changes on the server, it is necessary to check this checkbox.

Update