


Add server (Nextcloud) in WISECP

Digital Product module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Digital Product

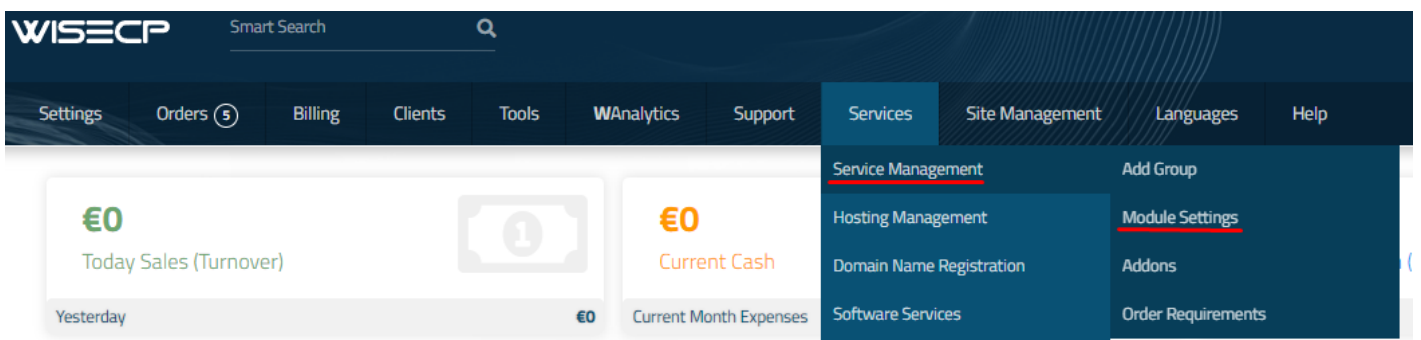

WISCEP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Module Settings




SSL Certificate

Manage



Product License

Manage




Other


Manage

WISCEP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other

 Initial Settings


 All Modules


WISCEP Smart Search

Settings Orders (8) Billing Clients Tools WAnalytics Support Services Site Management Languages Help


Other

Dashboard / Module

 Initial Settings

 All Modules

Search Within Modules

Write something... 

PUQ Digital Product				

3. In the opened page, click the '**Add Server**' button.

WISCP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Settings

Initial Settings All Modules

PUQ Digital Product



License key 7NWKV1- -HIS1WD 2024-07-09T05:33:12+02:00 Check and Save

Version: 1.0 Web Site Documentation Changelog

+ Add New Server Server Groups

Servers [Nextcloud](#)

10 Show Record Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
27	nextcloud-test.uuq.pl	active	Default	✓	nextcloud-test.uuq.pl	1/10000	 

Showing records from 1 to 1 - 1

Prev 1 Next

Turn Back

4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Nextcloud server you are connecting to.
- **Username/Password:** Username and Password on the Nextcloud server.

- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Other

Dashboard / Module Settings / Other

Initial SettingsAll Modules

PUQ Nextcloud

Go to Back

Add New Server

Server Name	nextcloud-test.uuq.pl
Maximum Number of Accounts	112
Server Group	Default
Default	<input type="checkbox"/> Set as default server in group
IP Address or Domain	nextcloud-test.uuq.pl
Username	wisecpadmin
Password	R
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	Test Connection

Add New Server

Turn Back

Revision #4

Created 10 June 2024 05:31:23 by Ruslan

Updated 10 June 2024 05:44:01 by Ruslan