


# Add server (Nextcloud) in WISECP

## Digital Product module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Digital Product

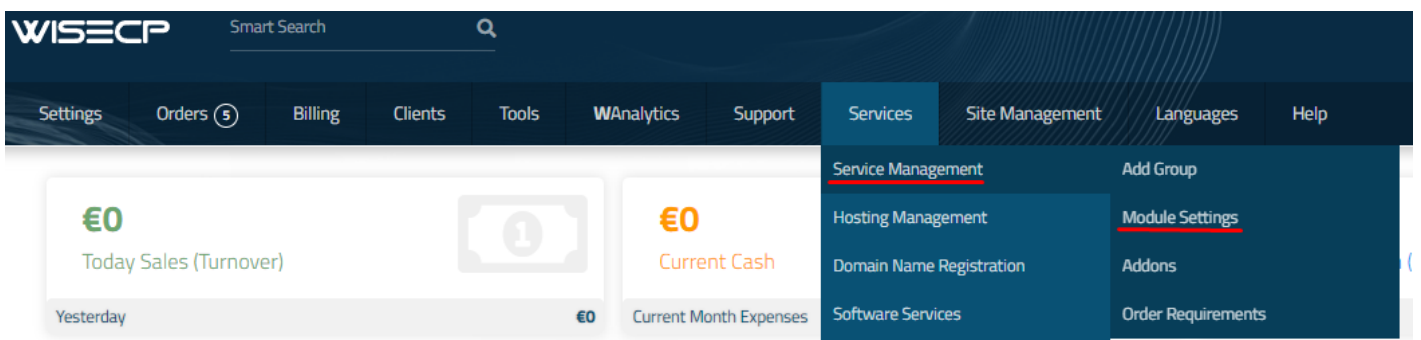

WISCEP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Module Settings




SSL Certificate

Manage



Product License

Manage




Other

Manage


WISCEP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Other



Initial Settings




All Modules

WISCEP Smart Search


Settings Orders (8) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Other

Dashboard / Module




Initial Settings



All Modules

#### Search Within Modules

Write something... 

PUQ Digital Product				

3. In the opened page, click the '**Add Server**' button.

WISCP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Settings

Initial Settings All Modules

PUQ Digital Product

License key 7NWKV1- -HIS1WD 2024-07-09T05:33:12+02:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

Servers [Nextcloud](#)

10 [Show Record](#) Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
27	nextcloud-test.uuq.pl	active	Default	✓	nextcloud-test.uuq.pl	1/10000	<a href="#">✎</a> <a href="#">✖</a>

Showing records from 1 to 1 - 1

[Prev](#) [1](#) [Next](#)

[Turn Back](#)

#### 4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Nextcloud server you are connecting to.
- **Username/Password:** Username and Password on the Nextcloud server.

- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Other

Dashboard / Module Settings / Other

Initial SettingsAll Modules

PUQ Nextcloud

Go to Back

Add New Server

Server Name	nextcloud-test.uuq.pl
Maximum Number of Accounts	112
Server Group	Default
Default	<input type="checkbox"/> Set as default server in group
IP Address or Domain	nextcloud-test.uuq.pl
Username	wisecpadmin
Password	R
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	Test Connection

Add New Server

Turn Back

Revision #4

Created 10 June 2024 05:31:23 by Ruslan

Updated 10 June 2024 05:44:01 by Ruslan