

Add server

Docker Immich module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#) | [n8n](#)

Add a new server to the system WHMCS.

System Settings->Servers->Add New Server


- Enter the correct **Name** and **Hostname**

Name	<input type="text" value="d01-test.uuq.pl"/>
Hostname	<input type="text" value="d01-test.uuq.pl"/>
IP Address	<input type="text"/>
Assigned IP Addresses (One per line)	<div></div>
Monthly Cost	<input type="text" value="0.00"/>
Datacenter/NOC	<input type="text"/>
Maximum No. of Accounts	<input type="text" value="200"/>
Server Status Address	<div><input type="text"/> To display this server on the server status page, enter the full path to the server status folder (required to be uploaded to each server you want to monitor) - eg. https://www.example.com/status/</div>
Enable/Disable	<input type="checkbox"/> Check to disable this server

Attention: Important Information

The **hostname** field represents the actual domain of the server running Docker and must match the **server_domain** parameter in the **n8n workflow**. If they do not match, communication will not function correctly.

Additionally, this domain must be configured so that all its subdomains resolve to the IP address of the server running Docker.

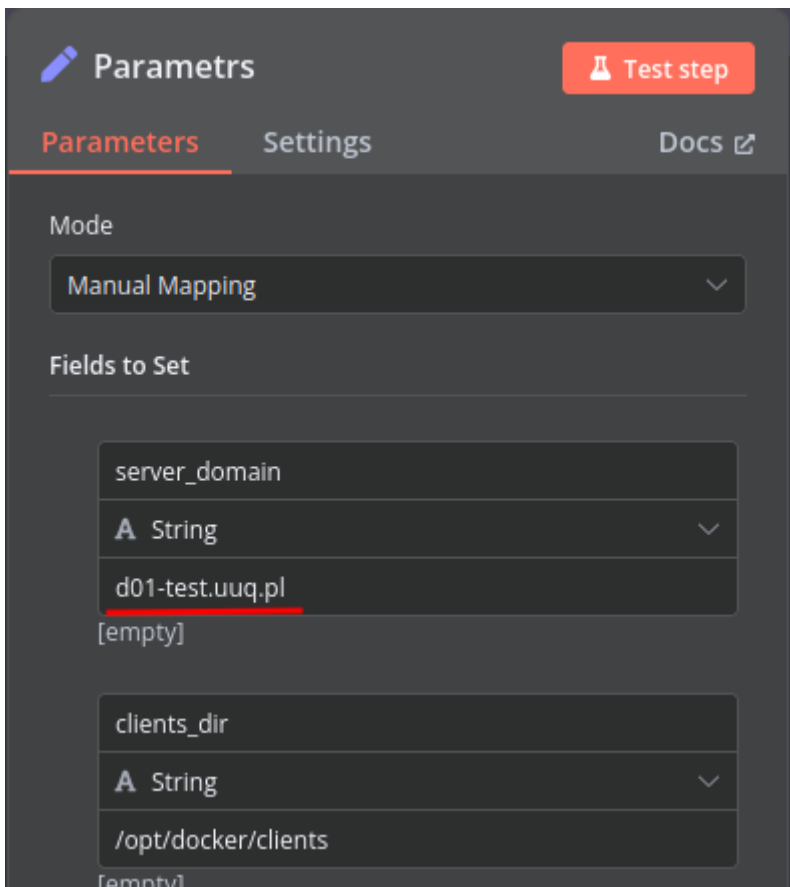

The screenshot shows the 'Parameters' configuration page in n8n. At the top, there is a 'Test step' button. Below it are tabs for 'Parameters' (selected), 'Settings', and 'Docs'. The 'Mode' is set to 'Manual Mapping'. Under 'Fields to Set', there are two parameter groups. The first group is for 'server_domain', which is a 'String' type, and its value is 'd01-test.uuq.pl'. The second group is for 'clients_dir', which is also a 'String' type, and its value is '/opt/docker/clients'.

Field	Type	Value
server_domain	String	d01-test.uuq.pl
clients_dir	String	/opt/docker/clients

In the **Server Details** section, select the "**PUQ Docker Immich**" module and enter the correct **username** and **password** for the **API endpoint** in the n8n workflow.

Additionally, in the **Access Hash** field, insert the **URL of the API entry point** for the n8n workflow.

Server Details

Module	<div>PUQ Docker Immich</div> <div>Test Connection</div> <div>✓ Connection successful. Some values have been auto-filled.</div>
Username	<div>Immich</div>
Password	<div>....</div>
Access Hash	<div>https://n8n.puqcloud.com/webhook/docker-immich</div>
Secure	<div><input checked="" type="checkbox"/> Check to use SSL Mode for Connections</div>

Webhook URLs

Test URL

Production URL

POST

<https://n8n.puqcloud.com/webhook/docker-immich>

HTTP Methods

POST [×](#)

Path

docker-immich

Authentication

Basic Auth

Credential for Basic Auth

Immich [✎](#)

Respond

Using 'Respond to Webhook' Node

Insert a 'Respond to Webhook' node to control when and how you respond. [More details](#)

Options

No properties

Add option

Revision #2

Created 18 March 2025 18:55:06 by Ruslan

Updated 21 March 2025 14:40:44 by Yuliia Noha