Add server


Docker InfluxDB module **WHMCS**

Order now | Download | FAQ | n8n

Add a new server to the system WHMCS.


```
System Settings->Servers->Add New Server
```

- Enter the correct **Name** and **Hostname**

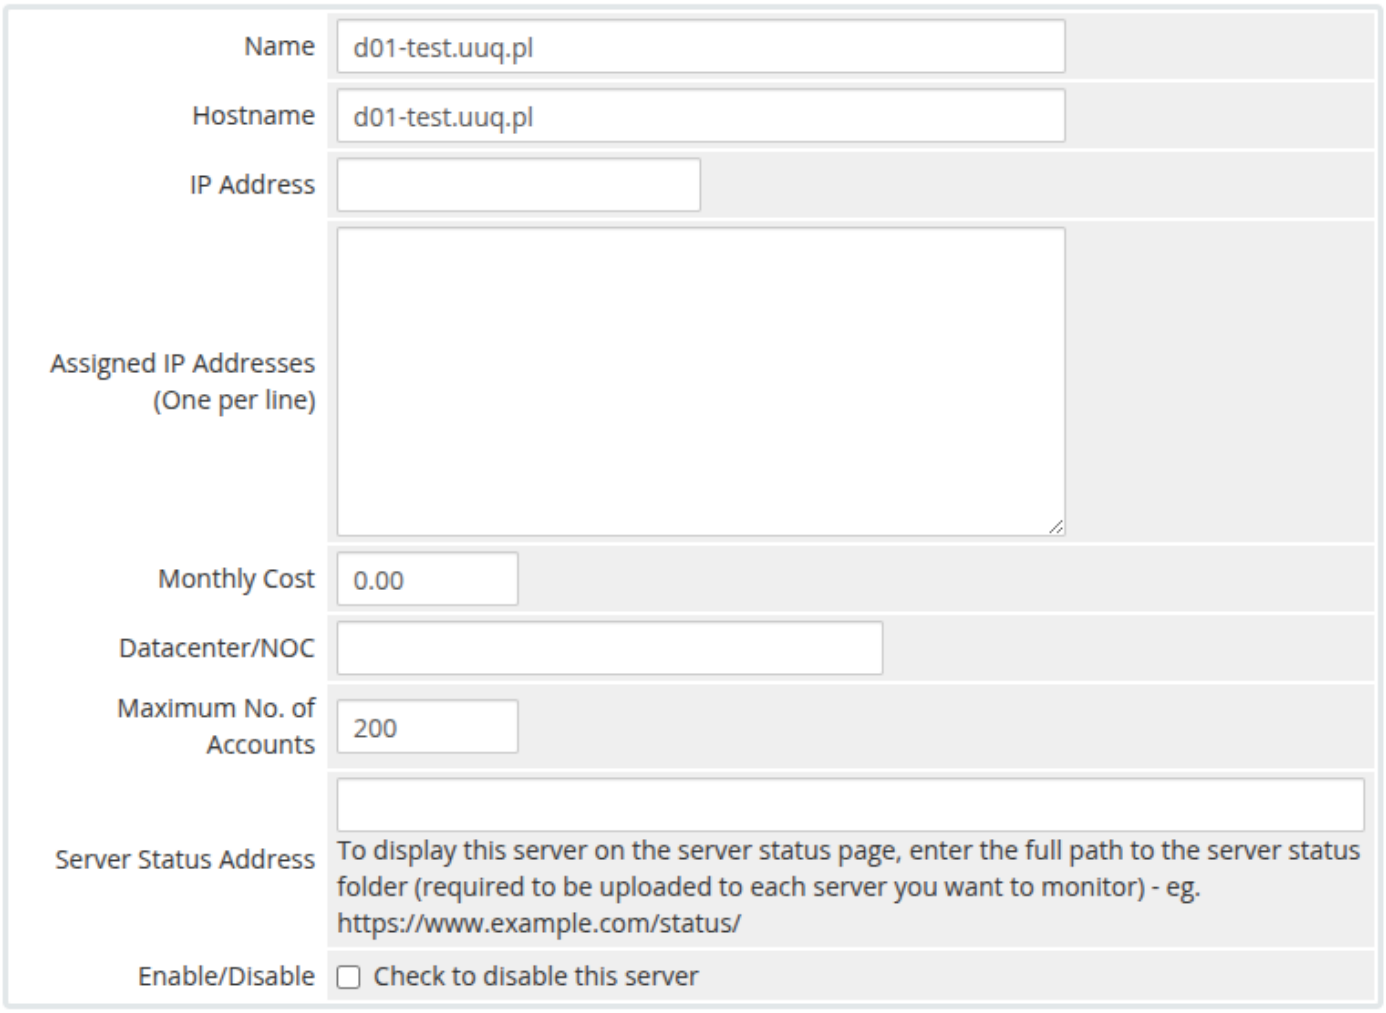

Attention: Important Information


The **hostname** field represents the actual domain of the server running Docker and must match the **server_domain** parameter in the **n8n workflow**. If they do not match, communication will not function correctly.
Additionally, this domain must be configured so that all its subdomains resolve to the IP address of the server running Docker.

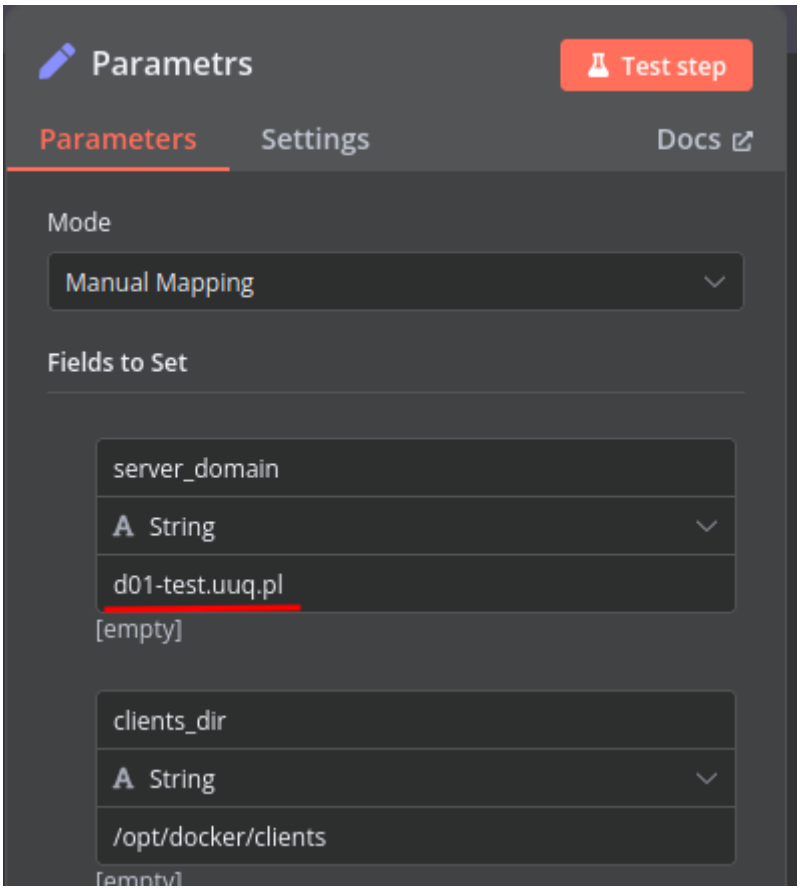


In the **Server Details** section, select the **"PUQ Docker InfluxDB"** module and enter the correct **username** and **password** for the **API endpoint** in the n8n workflow.

Additionally, in the **Access Hash** field, insert the **URL of the API entry point** for the n8n workflow.

Server Details

Module	PUQ Docker InfluxDB  Test Connection ✔ Connection successful. Some values have been auto-filled.
Username	InfluxDB
Password	••••
Access Hash	https://n8n.puqcloud.com/webhook/docker-influxdb
Secure	☑ Check to use SSL Mode for Connections

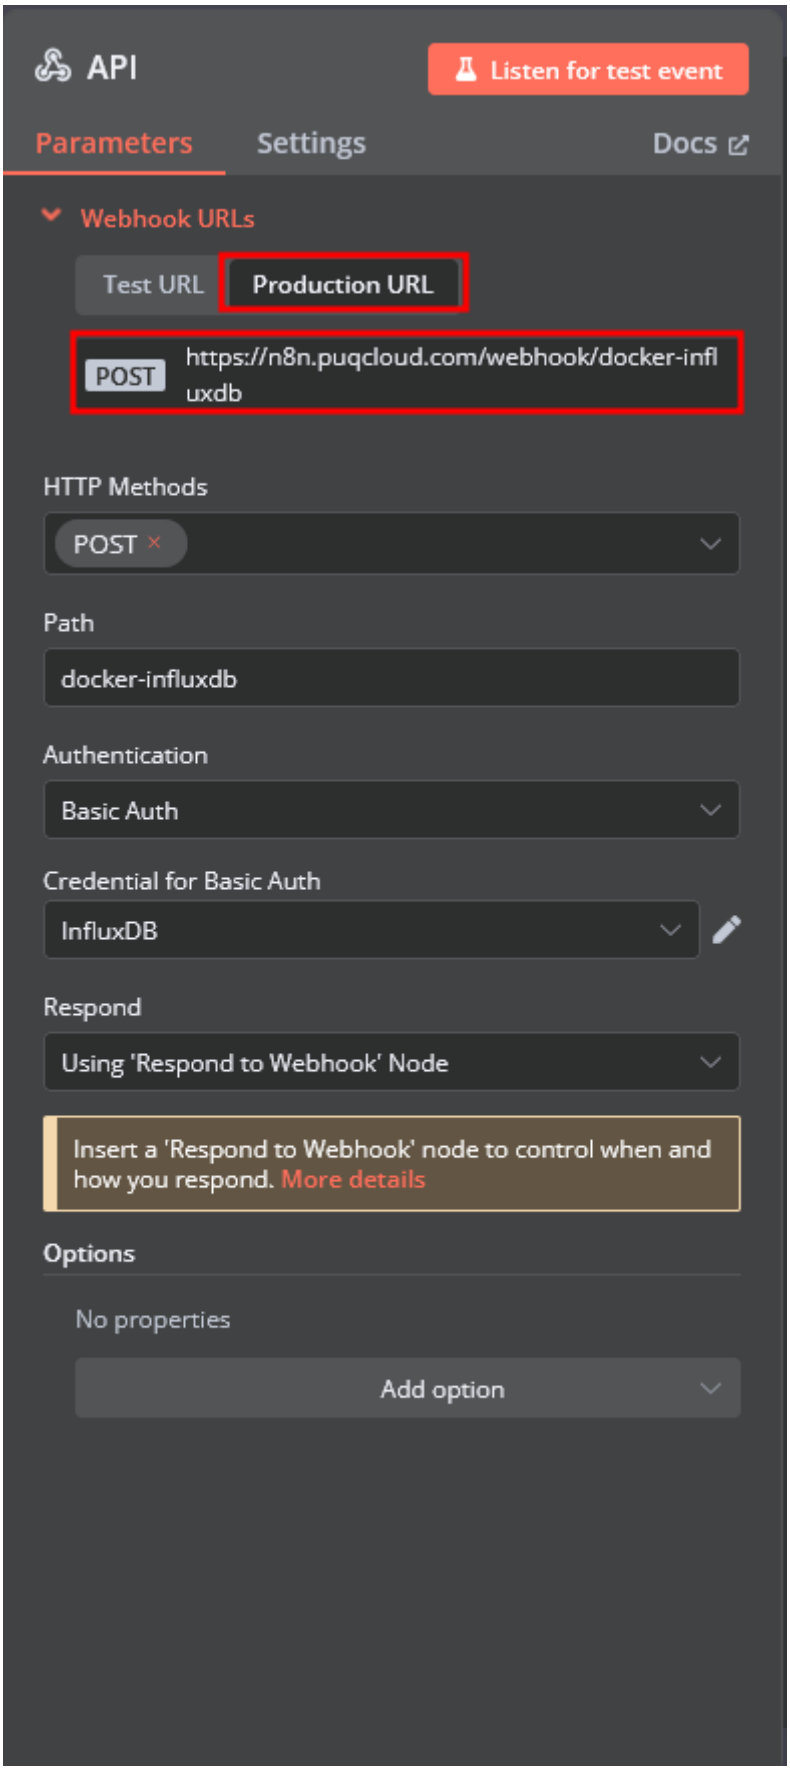
API
Listen for test event
Parameters
Settings
Docs
Webhook URLs
Test URL
Production URL
POST
https://n8n.puqcloud.com/webhook/docker-influxdb
HTTP Methods
POST
Path
docker-influxdb
Authentication
Basic Auth
Credential for Basic Auth
InfluxDB
Respond
Using 'Respond to Webhook' Node
Insert a 'Respond to Webhook' node to control when and how you respond. More details
Options
No properties
Add option

Revision #4

Created 23 March 2025 16:58:12 by Ruslan

Updated 26 March 2025 06:10:21 by Yuliia Noha