

Installation and configuration guide

- [Setup \(install/update\)](#)
- [License Activation](#)
- [Setup guide: Emby setup](#)
- [Add server \(Emby server\)](#)
- [Service configuration](#)
- [Add new library/item in Emby](#)
- [Getting Access Hash \(API key\)](#)

Setup (install/update)

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

1. Download the latest version of the module.

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Emby-Family/PUQ_WISECP-Emby-Family-latest.zip
```

All versions are available: https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Emby-Family/

2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Emby-Family-latest.zip
```

3. Copy and Replace "puqEmbyFamily" from "PUQ_WISECP-Emby-Family" to "WISECP_WEB_DIR/coremio/modules/Product/"



License Activation

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the admin area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby Family

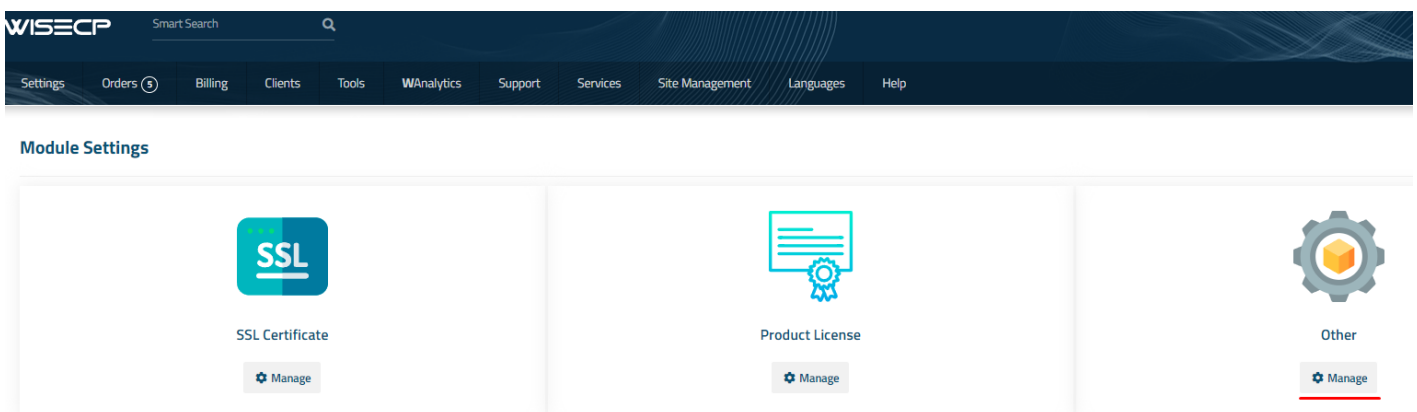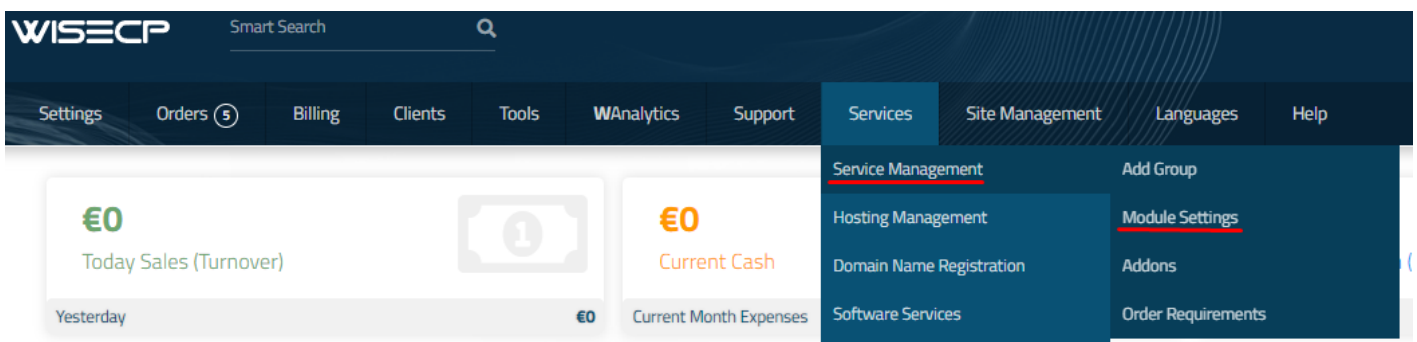

Other

Initial Settings

All Modules

Search Within Modules

PUQ Digital Product	PUQ Emby Family	PUQ Emby	PUQ Jellyfin	PUQ Mikrotik WireGuard Business-VPN
PUQ Mikrotik WireGuard VPN	PUQ MinIO S3	PUQ Nextcloud	PUQ Nextcloud	PUQ ownCloud
PUQ Proxmox KVM	PUQ WireGuard Business-VPN	PUQ WireGuard VPN		

Initial Settings

All Modules

PUQ Emby Family

License key

H 22

2024-08-02T13:49:53+02:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

+ Add New Server

Server Groups

Setup guide: Emby setup

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Install Emby on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Emby. All you need to do is run this command on your system

```
wget https://github.com/MediaBrowser/Emby.Releases/releases/download/4.7.14.0/emby-server-deb_4.7.14.0_amd64.deb
```

```
dpkg -i emby-server-deb_4.7.14.0_amd64.deb
```

2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

3. Configure nginx from a subdomain

Create a file named nginx.conf.

```
cd /etc/nginx/conf.d/  
nano nginx.conf
```

Then, insert the following text, replacing **DOMAIN_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate
server {
    listen 80;
    #listen [::]:80;
    server_name DOMAIN_NAME;

    # Uncomment to redirect HTTP to HTTPS
    return 302 https://$host$request_uri;
}

server {
    listen 443 ssl http2;
    #listen [::]:443 ssl http2;
    server_name DOMAIN_NAME;

    ## The default `client_max_body_size` is 1M, this might not be enough for some
    posters, etc.
    client_max_body_size 20M;

    # use a variable to store the upstream proxy
    # in this example we are using a hostname which is resolved via DNS
    # (if you aren't using DNS remove the resolver line and change the variable to point
    to an IP address e.g `set $emby 127.0.0.1`)
    set $emby 127.0.0.1;
    resolver 127.0.0.1 valid=30;

    ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;
    include /etc/letsencrypt/options-ssl-nginx.conf;
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;
    add_header Strict-Transport-Security "max-age=31536000" always;
    ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;
    ssl_stapling on;
    ssl_stapling_verify on;

    # Security / XSS Mitigation Headers
    # NOTE: X-Frame-Options may cause issues with the webOS app
    add_header X-Frame-Options "SAMEORIGIN";
```

```

add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
add_header X-Content-Type-Options "nosniff";

# COOP/COEP. Disable if you use external plugins/images/assets
add_header Cross-Origin-Opener-Policy "same-origin" always;
add_header Cross-Origin-Embedder-Policy "require-corp" always;
add_header Cross-Origin-Resource-Policy "same-origin" always;

# Permissions policy. May cause issues on some clients
add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()"
always;

# Tell browsers to use per-origin process isolation
add_header Origin-Agent-Cluster "?1" always;

# Content Security Policy
# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
# Enforces https content and restricts JS/CSS to origin
# External Javascript (such as cast_sender.js for Chromecast) must be
whitelisted.

# NOTE: The default CSP headers may cause issues with the webOS app
#add_header Content-Security-Policy "default-src https: data: blob:
http://image.tmdb.org; style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline'
https://www.gstatic.com https://www.youtube.com blob:; worker-src 'self' blob:; connect-src
'self'; object-src 'none'; frame-ancestors 'self'";

location = / {
    return 302 http://$host/web/;
    #return 302 https://$host/web/;
}

location / {
    # Proxy main Emby traffic
    proxy_pass http://$emby:8096;
    proxy_set_header Host $host;

```

```

        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;

        # Disable buffering when the nginx proxy gets very resource heavy upon
streaming

        proxy_buffering off;
    }

    # location block for /web - This is purely for aesthetics so /web/#!/ works instead
of having to go to /web/index.html/#!/
    location = /web/ {
        # Proxy main Emby traffic
        proxy_pass http://$emby:8096/web/index.html;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;
    }

    location /socket {
        # Proxy Emby Websockets traffic
        proxy_pass http://$emby:8096;
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection "upgrade";
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;
    }
}

```


Restarting nginx

```
sudo service nginx restart
```



Add server (Emby server)

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby Family

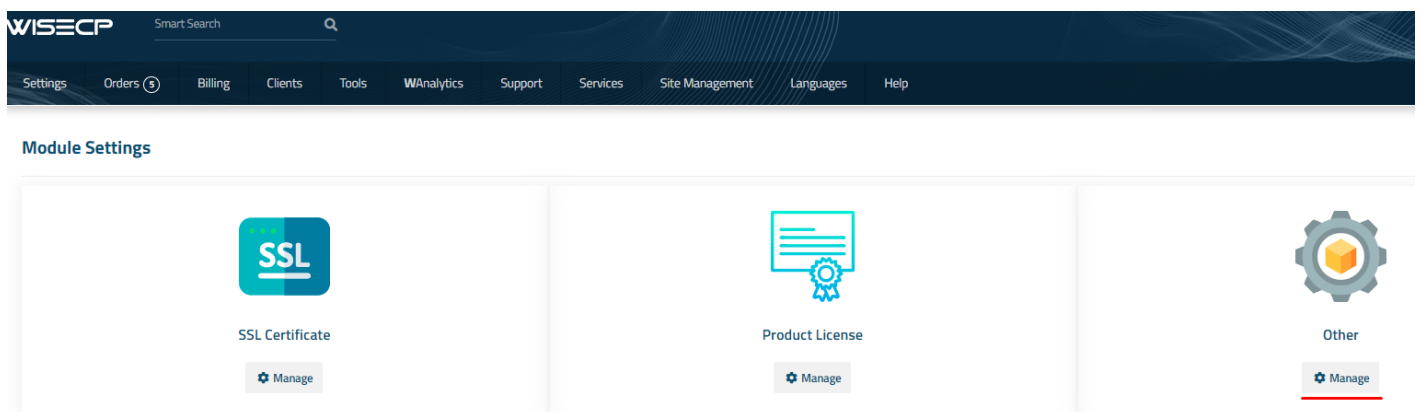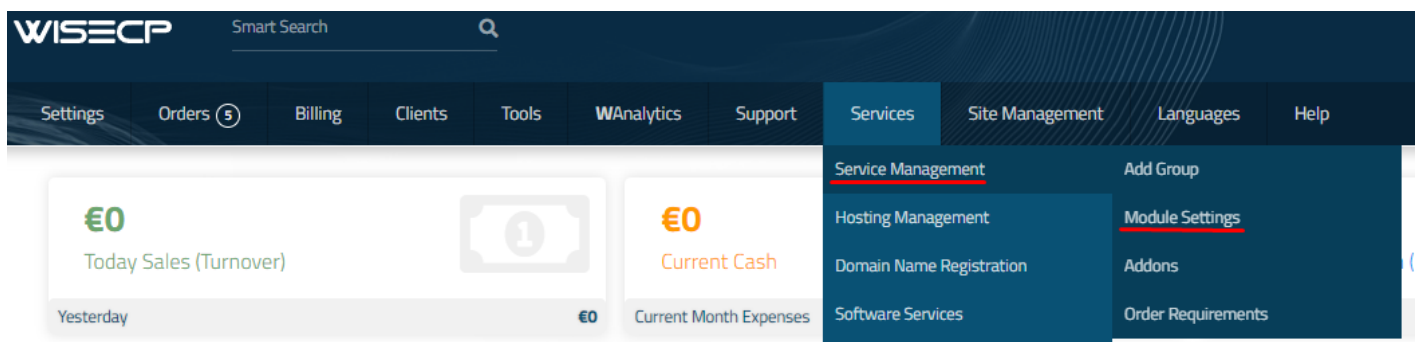

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Emby server you are connecting to.
- **Username:** is the username for the account on [Emby](#).
- **Password:** is the password for the account on [Emby](#).
- **Access Hash:** API key that you created in the previous step on the Emby server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Add New Server

Name	emby-test.uuq.pl	
Maximum Number of Accounts	100	
Server Group	Default	
Default	<input type="checkbox"/> Set as default server in group	
IP Address or Domain	emby-test.uuq.pl	
Username	admin	
Password	<div>✔ Connection test Successful</div> <div>cf [REDACTED] 04</div>	
Access Hash		
SSL	<input checked="" type="checkbox"/> Connect using SSL	
Port	443 <input type="checkbox"/> Change standard port	
Test Connection	<div>⚡ Test Connection</div>	

Add New Server

Service configuration

Emby Family module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the admin area of your **WISECP**.
2. Create New Service Group

Go to

Services -> Service Management -> Add Group

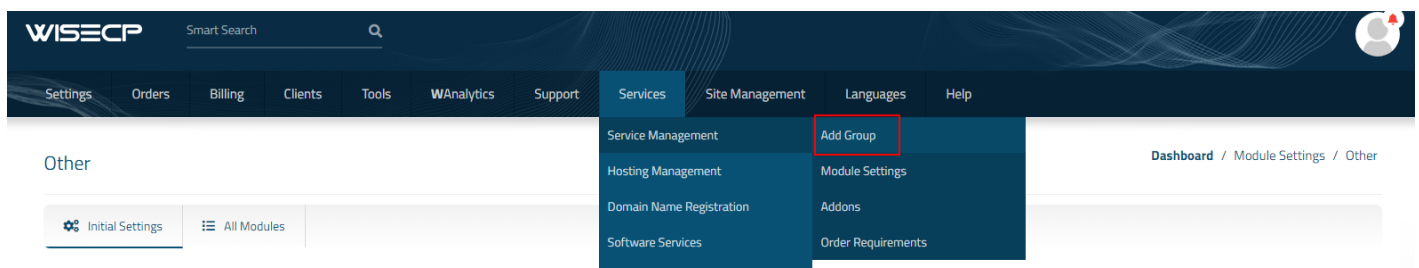

Enter all the necessary data and click the **'Create Group'** button.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

Create New Service Group

Dashboard / Create New Service Group

Create a new service group, you can also create new categories and manage the existing one from here.

ENUKRURDPTPLNLLVKAITIDHUFRAESLEDECSBSAR

Title

Media

Short Detail

Short Group Description

Listing Template

☒ Box List ☐ Horizontal List

Status

Enable

Background Image

(optional)

Group Colour

#FFFFFF

Order Upgrades

☐ Allow clients to upgrade to higher package in the same service group

External HTML Code

Paste your HTML code to this field (Optional)

You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty

3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

€0

Today Sales (Turnover)

Yesterday

€0

€0

Current Cash

Current Month Expenses

€0

0

Overdue Invoice (Total €0)

Payment Date Upcoming (Total €0 / Last 7 Days)

0

Client Registration (Today)

Yesterday

0

0

Pending Support Tickets

Total Resolved

0

0

Order in the Process (Total €0)

0

Reminder (Will Happen Today)

Service Management

Hosting Management

Domain Name Registration

Software Services


International SMS Services

Google SEO Services

VPN


Media

In the opened window, click the **'Create New Service'** button.

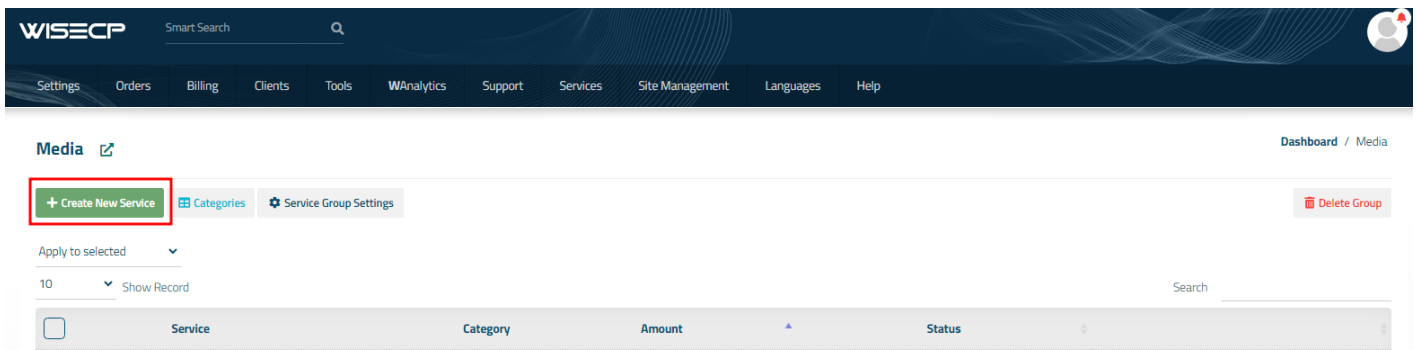

On the opened page, enter all the necessary details for your new service and navigate to the '**Core**' tab.

Select the '**PUQ Emby Family**' module from the drop-down list of modules.

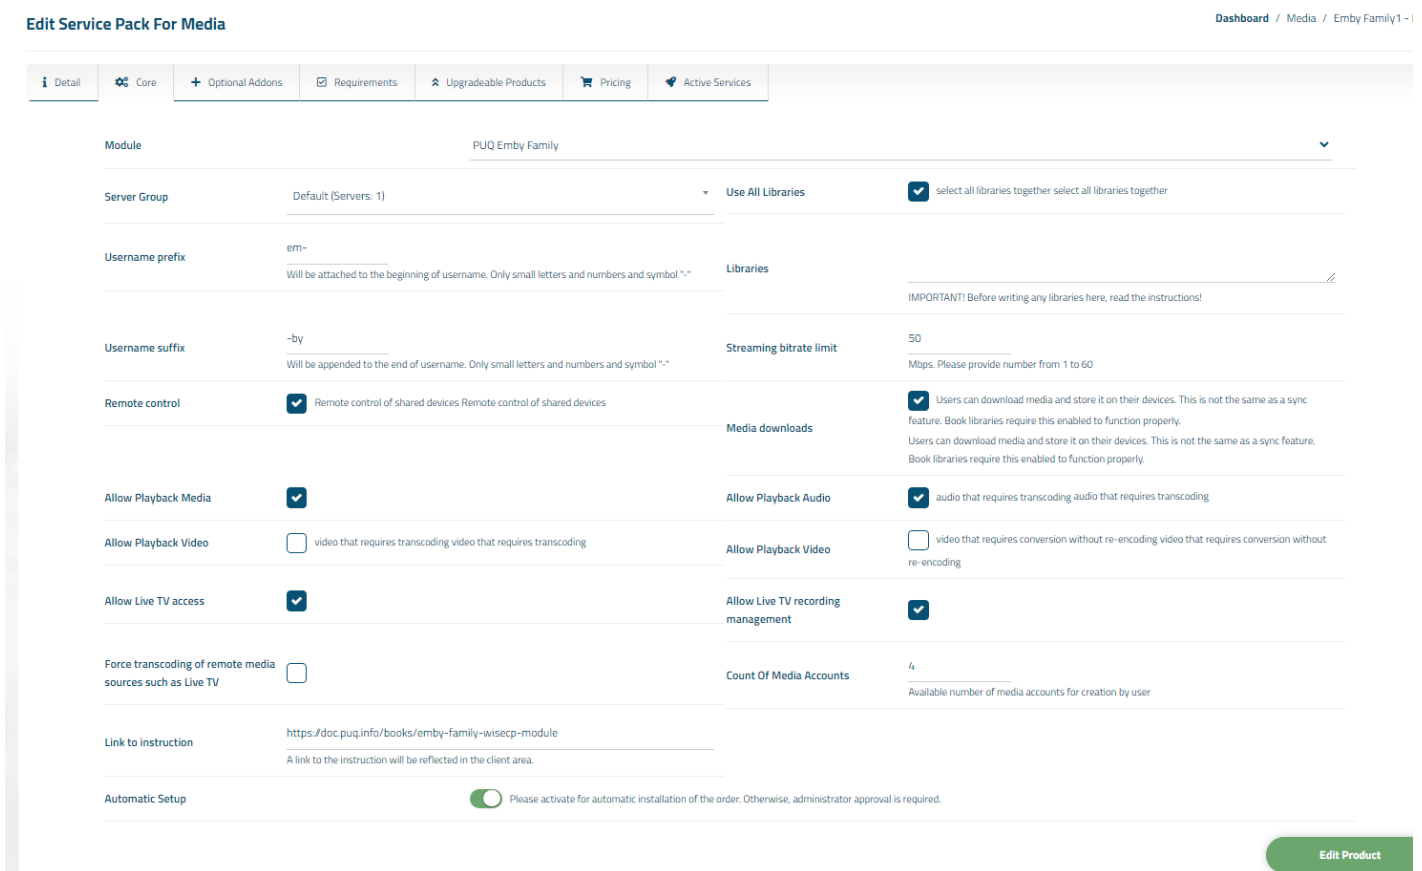

4. Fill in the configuration options according to your preferences.

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.
(**IMPORTANT! Start a new line for each new library**)

Example:

"Movies
Beginner`s Programming Course
Comedy"

IMPORTANT!

If you have a folder named "-", please enter it not as the first one or rename it.
If you don't want any folder to be accessible, type "-".

User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client_id>-<service_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

Media Accounts Configuration

- **Count of media accounts:** Available number of media accounts for creation by user.

Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client

area

Add new library/item in Emby

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

New library:

To create a new library, you should to **create a folder** in your Emby server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```

LIBRARY_NAME - The name of the new library.

After creating a folder, let's create a library in Emby:

Add a new library:

emby

Home

admin

Display

Home Screen

Playback

Subtitles

Password

Profile

Emby Web

Keyboard and Remote

Server

Dashboard

Settings

Users

Emby Premiere

Library

Live TV

Network

Transcoding

Database

Assign the appropriate folder to this library:

☐ Show advanced settings

Content type:

Movies



Review the [Emby movie naming guide](#).

Display name:

Movies

Folders



Library Settings

Preferred metadata download language:



Country:



Preferred image download language:



Okay

← Select Path

Network paths can be entered manually in the event the Network button fails to locate your devices. For example, `\\server` or `\\192.168.1.101`.

For Linux on Arch Linux, CentOS, Debian, Fedora, OpenSuse, or Ubuntu, you must grant the Emby system user at least read access to your storage locations.

Folder:



(Optional) Shared network folder:

If this folder is shared on your network, supplying the network share path can allow Emby apps on other devices to access media files directly.

Okay

New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```


```
wget DOWNLOAD_ITEM_URL
```

LIBRARY_NAME - The name of the library.

DOWNLOAD_ITEM_URL - The download URL of the item you want to upload to the server.

After all

Scan all libraries by clicking on the "Scan All Libraries" button or by clicking on the three dots and selecting "Scan Library Files".

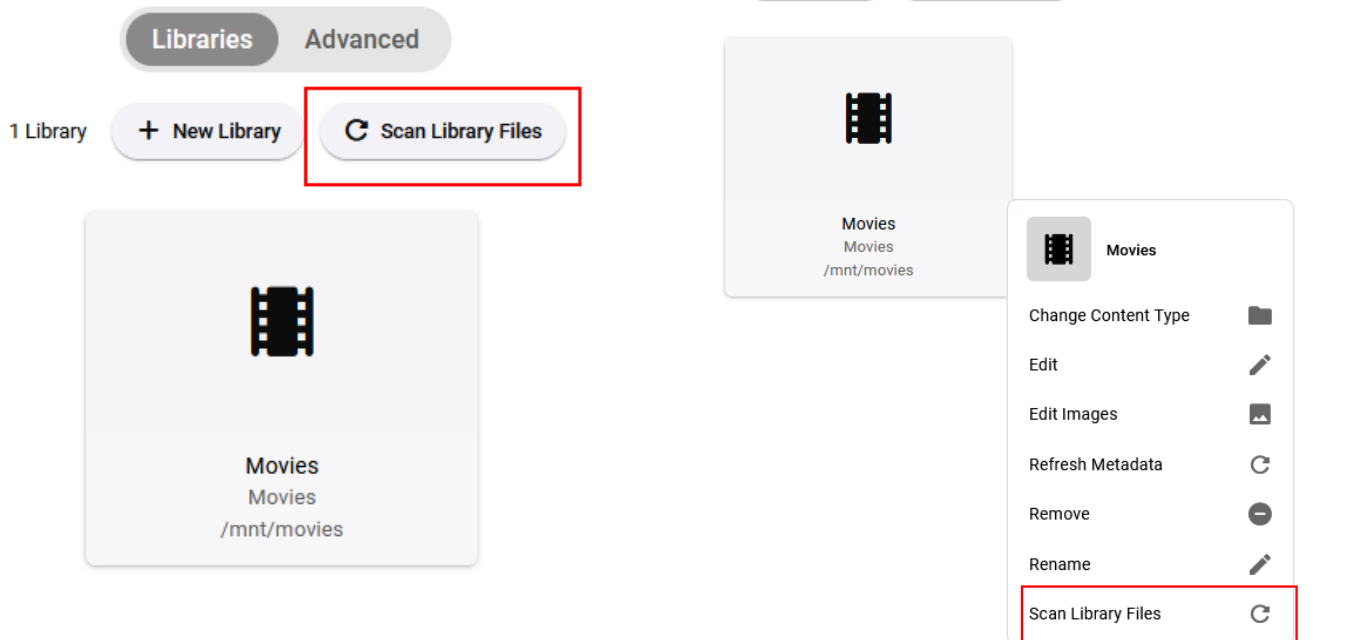


Getting Access Hash (API key)

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys

Create a new API Key

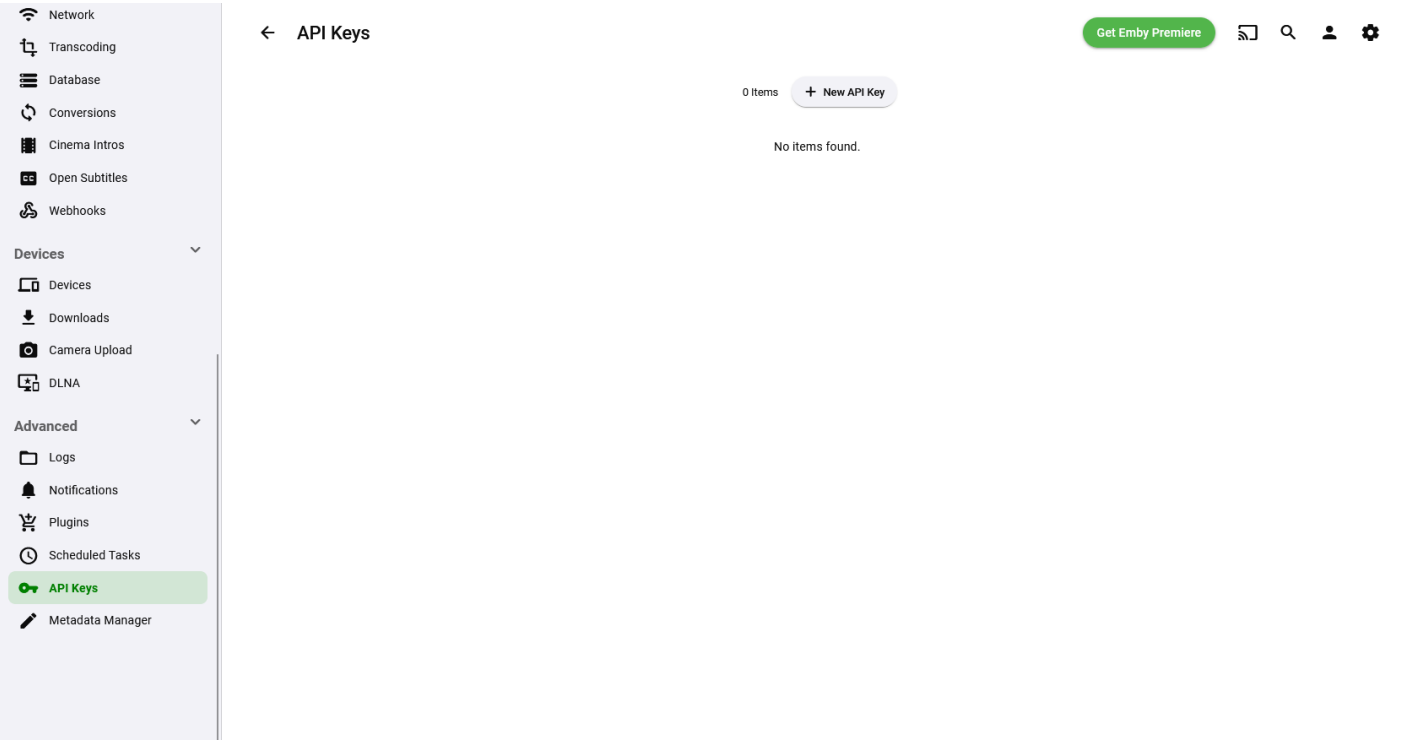

Whrite an App Name

← New API Key

App name

Example: Sickbeard, NzbDrone

Okay

Now you can getting an API key

← API Keys

Get Emby Premiere



3 Items

+ New API Key



cf[REDACTED]04 - wisecp
21/11/2023, 09:20:16

