

# Emby Family

## WISECP module

This module allows your company to offer public media services to customers through Emby accounts. It facilitates the creation of customer accounts on a pre-configured Emby server, enabling the sale of various media packages at different prices. Moreover, it includes the functionality to add multiple media accounts for a single service. This feature enables customers to manage multiple Emby accounts under one subscription. Administrators retain control over user account management, with the ability to suspend, terminate, or unsuspend accounts, change passwords, and more. Meanwhile, clients have the autonomy to manage their devices and libraries efficiently. The module also supports multiple languages, ensuring accessibility for a diverse user base. The module supports Emby Connect functionality.

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
  - [Setup \(install/update\)](#)
  - [License Activation](#)
  - [Setup guide: Emby setup](#)
  - [Add server \(Emby server\)](#)
  - [Service configuration](#)
  - [Add new library/item in Emby](#)
  - [Getting Access Hash \(API key\)](#)
- [Client Area](#)

- Product Home Screen
  - Manage Emby Connect
  - Add Media Account
  - Management Media account
- Admin Area
    - Order Detail

# Description

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Thanks to the module, the company can now offer public media services to its customers based on Emby accounts with added flexibility.

The module facilitates the creation of customer accounts on a pre-prepared Emby server. Now, it empowers users to define and manage multiple media accounts, allowing for more tailored offerings and increased customer satisfaction. Each account corresponds to a selected package, enabling customers to access varied media content at different price points. Notably, clients can now possess multiple independent media accounts, broadening their media access options.

Moreover, the module seamlessly integrates with Emby Connect functionality, enabling users to access their media accounts across different devices and platforms with ease.

For the correct operation of the module, a pre-prepared Emby installation is required (the module does not assist in the installation of the Emby server and assumes that such installation is ready for operation through API.) Module use Emby API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Emby server, including all installation steps such as PHP, Emby , SSL certificates etc.

### **Requirements:**

WISECP: v3.1.5+, php: v8.x, IONCUBE: V12+

Emby: v4.7+

## Functions:

- Auto create and deploy client account
- Multi-Account Support: Enable users to manage multiple media accounts within a single

service

- The module uses only the API to manage the accounts
- Module supports multilingualism (**Arabic, Bosnian, Czech, German, Greek, English, Spanish, Persian, French, Hungarian, Indonesian, Italian, Georgian, Latvian, Dutch, Polish, Portuguese, Romanian, Ukrainian**)
- The module shows all user info: enabled user libraries, active devices etc.
- Link to instructions for setting up the service in the client area.
- Emby Connect Integration: Seamlessly access media accounts across different devices and platforms using Emby Connect functionality.

## Available options in the admin panel:

- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- Drop all devices
- API connection status
- List of active devices
- List of enabled user libraries
- List of Media Accounts

## Available options in the client panel:

- List of active devices
- List of enabled user libraries
- Drop all devices
- Change the Emby user password
- Add/Manage Emby Connect account
- Add/Management/Delete Media Account
- Drop Account Devices
- List of Media Accounts

Screenshot of the client area



- Details
- Additional Services
- Upgrade
- Cancellation Request

Order ID #187



Renew Now

General Information		Invoice #297
Service Group	Media	
Service Name	Emby Family1	
Services Status	Active	
Payment Period	Monthly	
Renewed On	03.07.2024	
Next Due Date	03.08.2024	
<b>Amount : 22zł</b>		

- User manual
- Web interface
- Drop All Devices
- Emby Connect

### Management Media User

Username 4-187

Status Enable

Password

Save

Emby Connect Username: Username not entered

- Libraries
- Movies
  - Cartoons
  - Sport
  - Movies
  - Beginner's Programming Course

Active Devices 10 Show Record Search

Device Name	App Name	Last Activity
No data available in table		

No Records Prev Next

Streaming bitrate limit 0 Mbps

### Media Accounts

Count of Media Account: 1 / 4

Add Media Account



4-187-thfghdh  
Emby Connect: on

# Screenshot of the Admin area

## Emby Family1 Order Detail

Dashboard / Orders / Emby Family1 Order Detail

[Detail](#) [Core](#) [Blocks](#) [+ Order Addons](#) [Requirements](#) [Upgrade / Downgrade](#) [History](#)

[+ Cancellation / Refund](#)

API Module PUQ Emby Family

[Drop All Devices](#)

✓ API answer OK

Username: 4-187 Is Disabled : NO

Movies

Cartoons

Sport

Movies

Beginner's Programming Course

Emby Connect Username	Active Devices	Streaming bitrate limit
yulianoha@gmail.com	0	0 Mbps

Device Name	App Name	Last Activity	
Enabled	Username	Emby Connect Username	Enabled Libraries
✓	4-187-thfghdh	yulii.noha@puq.pl	Movies Cartoons Movies Beginner's Programming Course

Username 4-187 Password fstiYP6C Server emby-test.uuq.pl

Overwrite package settings  Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server  To apply the changes on the server, it is necessary to check this checkbox.

Update

# Changelog

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### v1.0.1 Released 13-08-2024

1. Fixed bug with password, when "Show password" is "no"
  2. Fixed a bug with sub-accounts. Now, if the number of media accounts equals 0, when "Change package" is clicked, the sub-accounts are removed.
- 

### v1.0 Released 05-07-2024

First version

# Installation and configuration guide

# Setup (install/update)

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

### 1. Download the latest version of the module.

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Emby-Family/PUQ_WISECP-Emby-Family-latest.zip
```

All versions are available: [https://download.puqcloud.com/WISECP/Product/PUQ\\_WISECP-Emby-Family/](https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Emby-Family/)

### 2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Emby-Family-latest.zip
```

### 3. Copy and Replace "puqEmbyFamily" from "PUQ\_WISECP-Emby-Family" to "WISECP\_WEB\_DIR/coremio/modules/Product/"



# License Activation

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the admin area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby Family

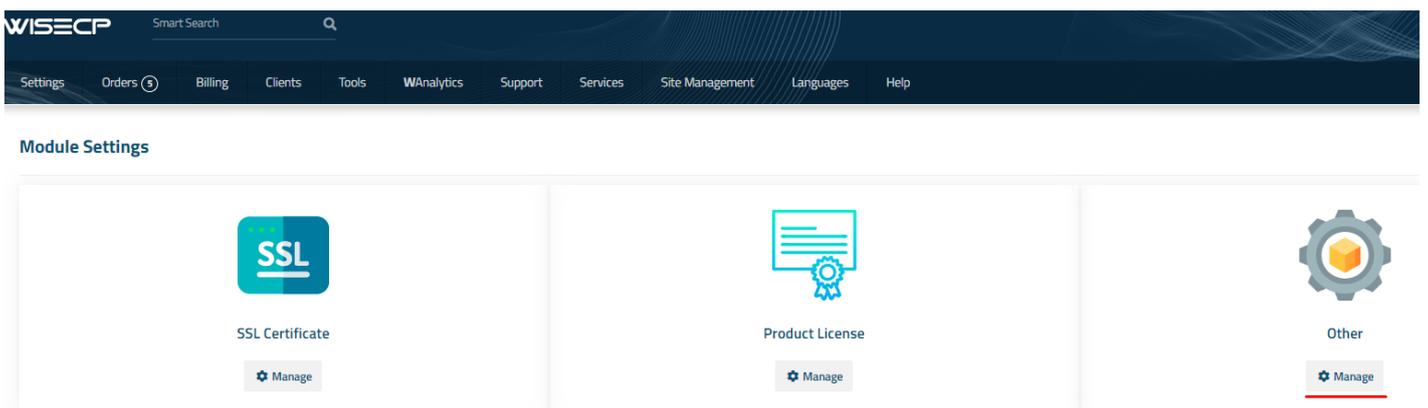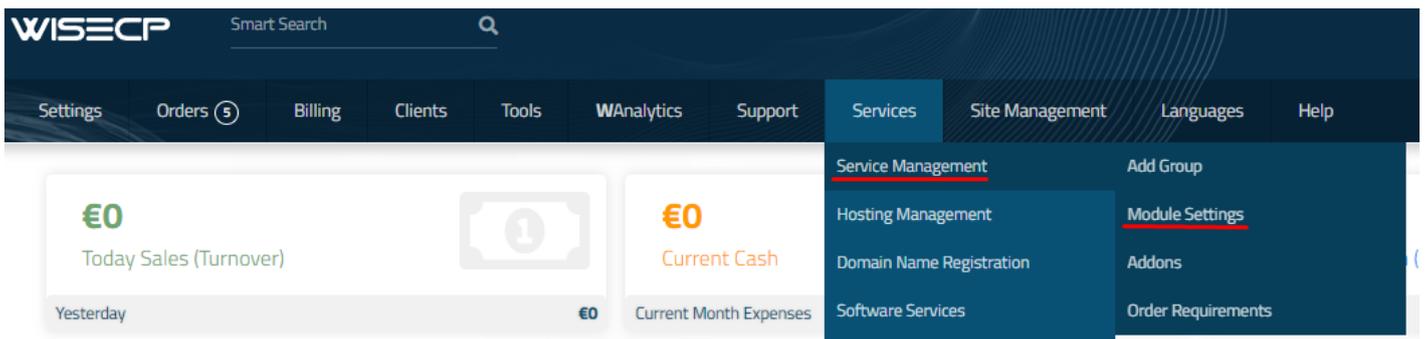



### Other

Initial Settings

All Modules

#### Search Within Modules

Write something...



PUQ Digital Product

PUQ Emby Family

PUQ Emby

PUQ Jellyfin

PUQ Mikrotik WireGuard Business-VPN

PUQ Mikrotik WireGuard VPN

PUQ MinIO S3

PUQ Nextcloud

PUQ Nextcloud

PUQ ownCloud

PUQ Proxmox KVM

PUQ WireGuard Business-VPN

PUQ WireGuard VPN

Initial Settings

All Modules

#### PUQ Emby Family

License key

H [REDACTED] ZR

2024-08-02T13:49:53+02:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

Add New Server

Server Groups

# Setup guide: Emby setup

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### 1. Install Emby on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Emby. All you need to do is run this command on your system

```
wget https://github.com/MediaBrowser/Emby.Releases/releases/download/4.7.14.0/emby-server-deb_4.7.14.0_amd64.deb
```

```
dpkg -i emby-server-deb_4.7.14.0_amd64.deb
```

### 2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

### 3. Configure nginx from a subdomain

Create a file named nginx.conf.

```
cd /etc/nginx/conf.d/  
nano nginx.conf
```

Then, insert the following text, replacing **DOMAIN\_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate  
server {  
    listen 80;  
    #listen [::]:80;  
    server_name DOMAIN_NAME;  
  
    # Uncomment to redirect HTTP to HTTPS  
    return 302 https://$host$request_uri;  
}  
  
server {  
    listen 443 ssl http2;  
    #listen [::]:443 ssl http2;  
    server_name DOMAIN_NAME;  
  
    ## The default `client_max_body_size` is 1M, this might not be enough for some  
posters, etc.  
    client_max_body_size 20M;  
  
    # use a variable to store the upstream proxy  
    # in this example we are using a hostname which is resolved via DNS  
    # (if you aren't using DNS remove the resolver line and change the variable to point  
to an IP address e.g `set $emby 127.0.0.1`)  
    set $emby 127.0.0.1;  
    resolver 127.0.0.1 valid=30;  
  
    ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;  
    ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;  
    include /etc/letsencrypt/options-ssl-nginx.conf;  
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;  
    add_header Strict-Transport-Security "max-age=31536000" always;  
    ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;  
    ssl_stapling on;  
    ssl_stapling_verify on;
```

```

# Security / XSS Mitigation Headers
# NOTE: X-Frame-Options may cause issues with the webOS app
add_header X-Frame-Options "SAMEORIGIN";
add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
add_header X-Content-Type-Options "nosniff";

# COOP/COEP. Disable if you use external plugins/images/assets
add_header Cross-Origin-Opener-Policy "same-origin" always;
add_header Cross-Origin-Embedder-Policy "require-corp" always;
add_header Cross-Origin-Resource-Policy "same-origin" always;

# Permissions policy. May cause issues on some clients
add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()"
always;

# Tell browsers to use per-origin process isolation
add_header Origin-Agent-Cluster "?1" always;

# Content Security Policy
# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
# Enforces https content and restricts JS/CSS to origin
# External Javascript (such as cast_sender.js for Chromecast) must be
whitelisted.
# NOTE: The default CSP headers may cause issues with the webOS app
#add_header Content-Security-Policy "default-src https: data: blob:
http://image.tmdb.org; style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline'
https://www.gstatic.com https://www.youtube.com blob:; worker-src 'self' blob:; connect-src
'self'; object-src 'none'; frame-ancestors 'self'";

location = / {
    return 302 http://$host/web/;
    #return 302 https://$host/web/;
}

location / {

```

```
# Proxy main Emby traffic
proxy_pass http://$emby:8096;
proxy_set_header Host $host;
proxy_set_header X-Real-IP $remote_addr;
proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
proxy_set_header X-Forwarded-Proto $scheme;
proxy_set_header X-Forwarded-Protocol $scheme;
proxy_set_header X-Forwarded-Host $http_host;

# Disable buffering when the nginx proxy gets very resource heavy upon
streaming
proxy_buffering off;
}

# location block for /web - This is purely for aesthetics so /web/#!/ works instead
of having to go to /web/index.html/#!/
location = /web/ {
    # Proxy main Emby traffic
    proxy_pass http://$emby:8096/web/index.html;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}

location /socket {
    # Proxy Emby Websockets traffic
    proxy_pass http://$emby:8096;
    proxy_http_version 1.1;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection "upgrade";
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}
```

```
}
```

## Restarting nginx

```
sudo service nginx restart
```



# Add server (Emby server)

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby Family

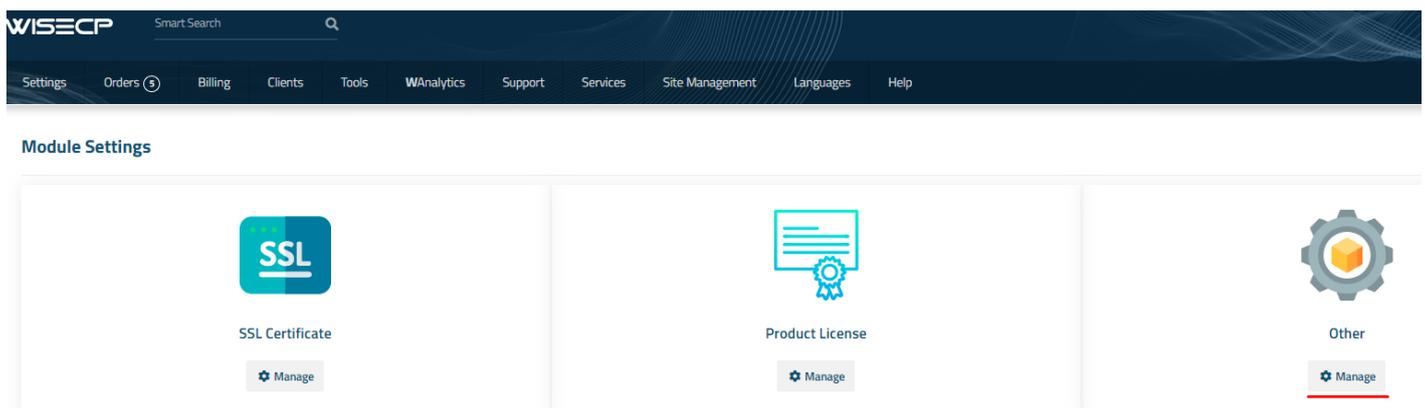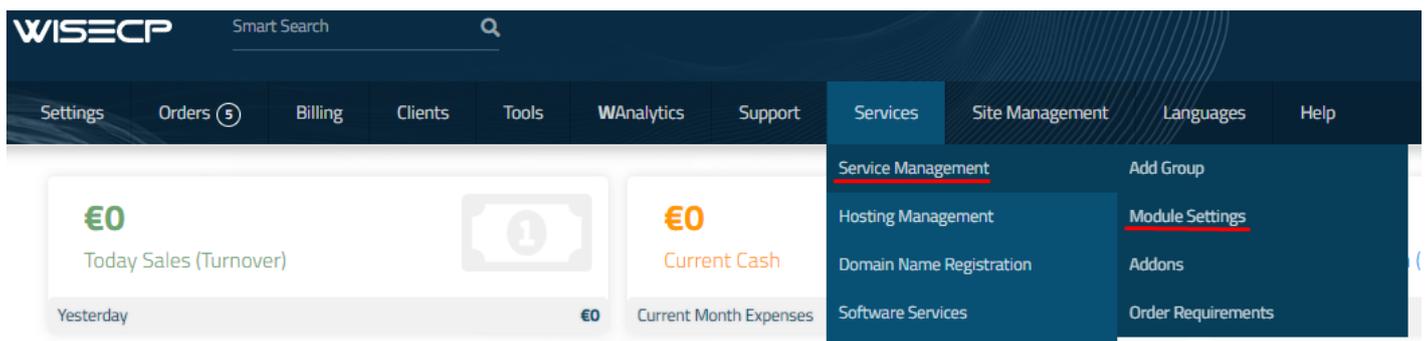

Other

Initial Settings All Modules

Search Within Modules

Write something...

PUQ Digital Product	PUQ Emby Family	PUQ Emby	PUQ Jellyfin	PUQ Mikrotik WireGuard Business-VPN
PUQ Mikrotik WireGuard VPN	PUQ MiniIO S3	PUQ Nextcloud	PUQ Nextcloud	PUQ ownCloud
PUQ Proxmox KVM	PUQ WireGuard Business-VPN	PUQ WireGuard VPN		

3. In the opened page, click the 'Add Server' button.

Initial Settings All Modules

PUQ Emby Family

License key: [Redacted] 2024-08-02T13:49:53+02:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Emby server you are connecting to.
- **Username:** is the username for the account on [Emby](#).
- **Password:** is the password for the account on [Emby](#).
- **Access Hash:** API key that you created in the previous step on the Emby server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

## Add New Server

Name	emby-test.uuq.pl
Maximum Number of Accounts	100
Server Group	Default <span>▼</span>
Default	<input type="checkbox"/> Set as default server in group
IP Address or Domain	emby-test.uuq.pl
Username	admin
Password	<div style="background-color: #4CAF50; color: white; padding: 2px; display: flex; align-items: center; justify-content: space-between;"><span>✓ Connection test Successful</span><span>✕</span></div> cf <span style="background-color: red; color: black; padding: 0 2px;">XXXXXXXXXX</span> 04
Access Hash	<hr style="border: 0; border-top: 1px solid #ccc; margin: 0;"/> <div style="text-align: right;"><small>↗</small></div>
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	<input type="button" value="Test Connection"/>

Add New Server

# Service configuration

## Emby Family module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the admin area of your **WISECP**.
2. Create New Service Group

Go to

Services -> Service Management -> Add Group

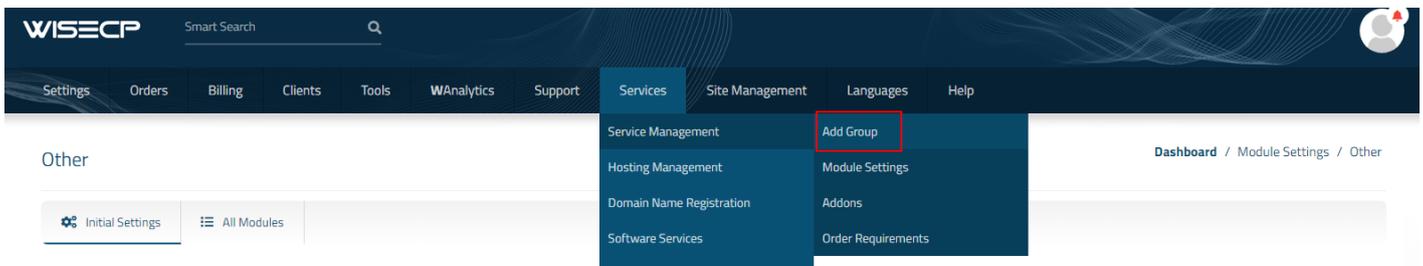


Enter all the necessary data and click the **'Create Group'** button.

The screenshot shows the 'Create New Service Group' page in the WISECP system. At the top, there is a navigation bar with the WISECP logo, a search bar, and various menu items: Settings, Orders, Billing, Clients, Tools, WAnalytics, Support, Services, Site Management, Languages, and Help. The page title is 'Create New Service Group' and the breadcrumb is 'Dashboard / Create New Service Group'. A green banner at the top of the form area says: 'Create a new service group, you can also create new categories and manage the existing one from here.' Below this is a language selection bar with options: EN, UK, RU, RO, PT, PL, NL, LV, KA, IT, ID, HU, FR, FA, ES, EL, DE, CS, BS, AR. The form fields are: Title (Media), Short Detail (Short Group Description), Listing Template (Box List selected, Horizontal List unselected), Status (Enable), Background Image (optional), Group Colour (#FFFFFF), Order Upgrades (checkbox for 'Allow clients to upgrade to higher package in the same service group'), and External HTML Code (with a note: 'You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty').


### 3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

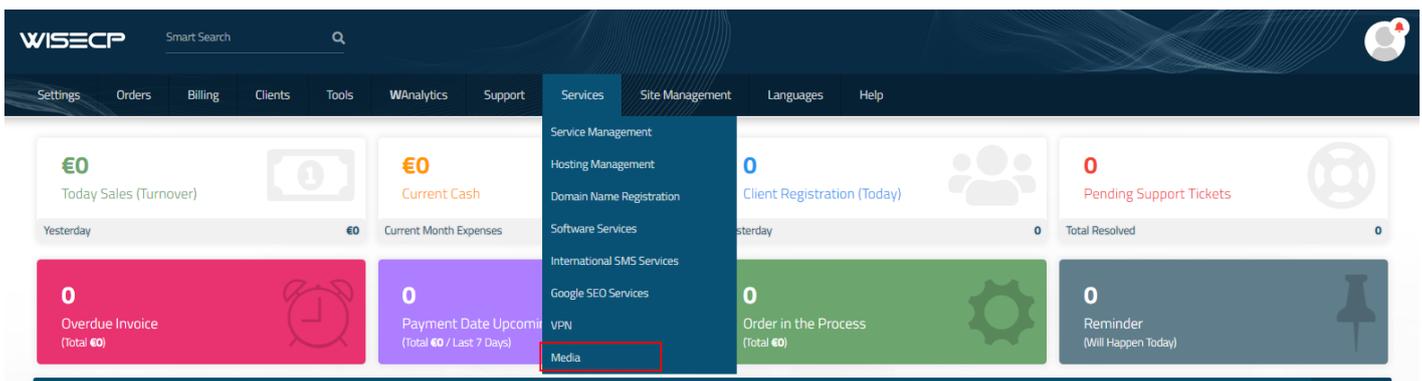


In the opened window, click the **'Create New Service'** button.

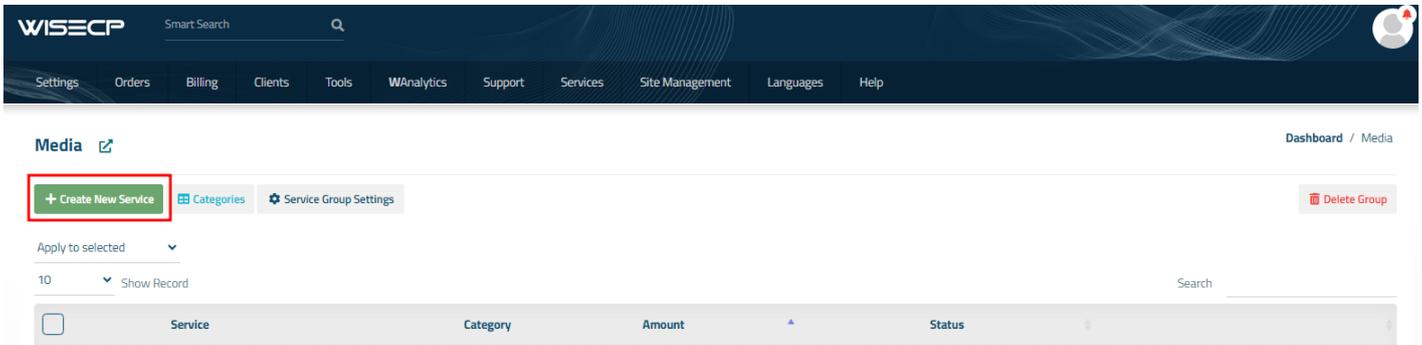

On the opened page, enter all the necessary details for your new service and navigate to the 'Core' tab.

Select the 'PUQ Emby Family' module from the drop-down list of modules.

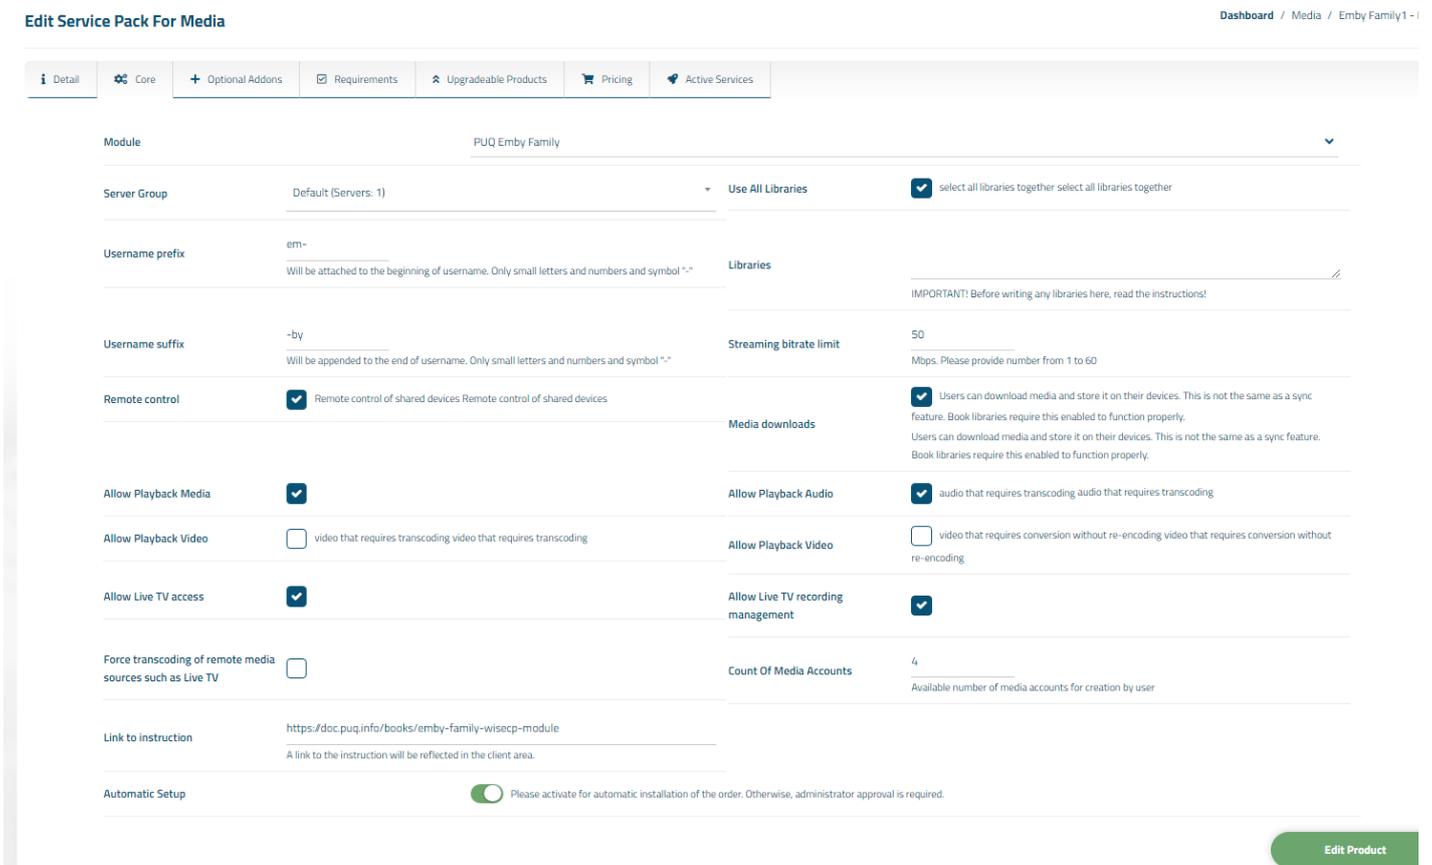

4. Fill in the configuration options according to your preferences.

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product. **(IMPORTANT! Start a new line for each new library)**

Example:

"Movies  
Beginner`s Programming Course  
Comedy"

**IMPORTANT!**

If you have a folder named "-", please enter it not as the first one or rename it.  
If you don't want any folder to be accessible, type "-".

## User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client\_id>-<service\_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

## Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

## Media Accounts Configuration

- **Count of media accounts:** Available number of media accounts for creation by user.

## Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client

area

# Add new library/item in Emby

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

## New library:

To create a new library, you should to **create a folder** in your Emby server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```

**LIBRARY\_NAME** - The name of the new library.

After creating a folder, let's create a library in Emby:

Add a new library:

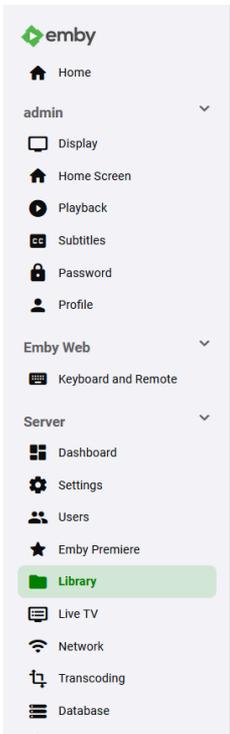

← Library ?

Get Emby Premiere    

Libraries Advanced

0 Libraries + New Library Scan Library Files

Assign the appropriate folder to this library:

Show advanced settings

Content type:

Movies 

Review the [Emby movie naming guide](#).

Display name:

Movies

**Folders** 

### Library Settings

Preferred metadata download language:



Country:



Preferred image download language:



Okay

## ← Select Path

Network paths can be entered manually in the event the Network button fails to locate your devices. For example, `\\server` or `\\192.168.1.101`.

For Linux on Arch Linux, CentOS, Debian, Fedora, OpenSuse, or Ubuntu, you must grant the Emby system user at least read access to your storage locations.

Folder:



(Optional) Shared network folder:

If this folder is shared on your network, supplying the network share path can allow Emby apps on other devices to access media files directly.

Okay

## New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```



```
wget DOWNLOAD_ITEM_URL
```

**LIBRARY\_NAME** - The name of the library.

**DOWNLOAD\_ITEM\_URL** - The download URL of the item you want to upload to the server.

## After all

Scan all libraries by clicking on the "Scan All Libraries" button, or by clicking on the three dots and selecting "Scan Library Files".

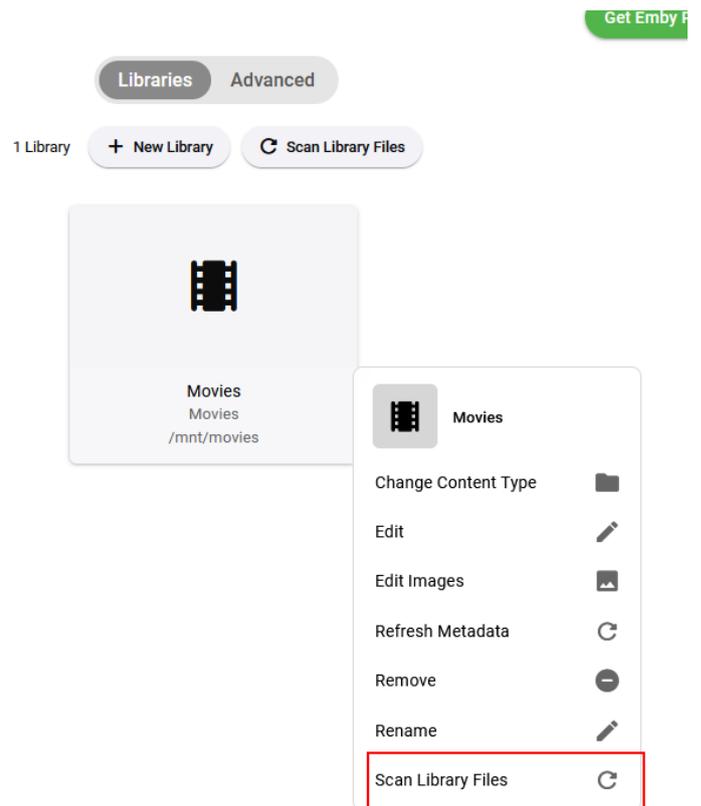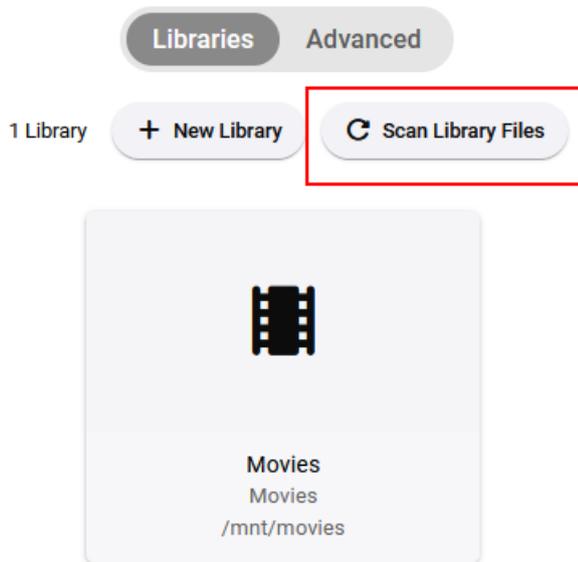


# Getting Access Hash (API key)

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys

## Create a new API Key

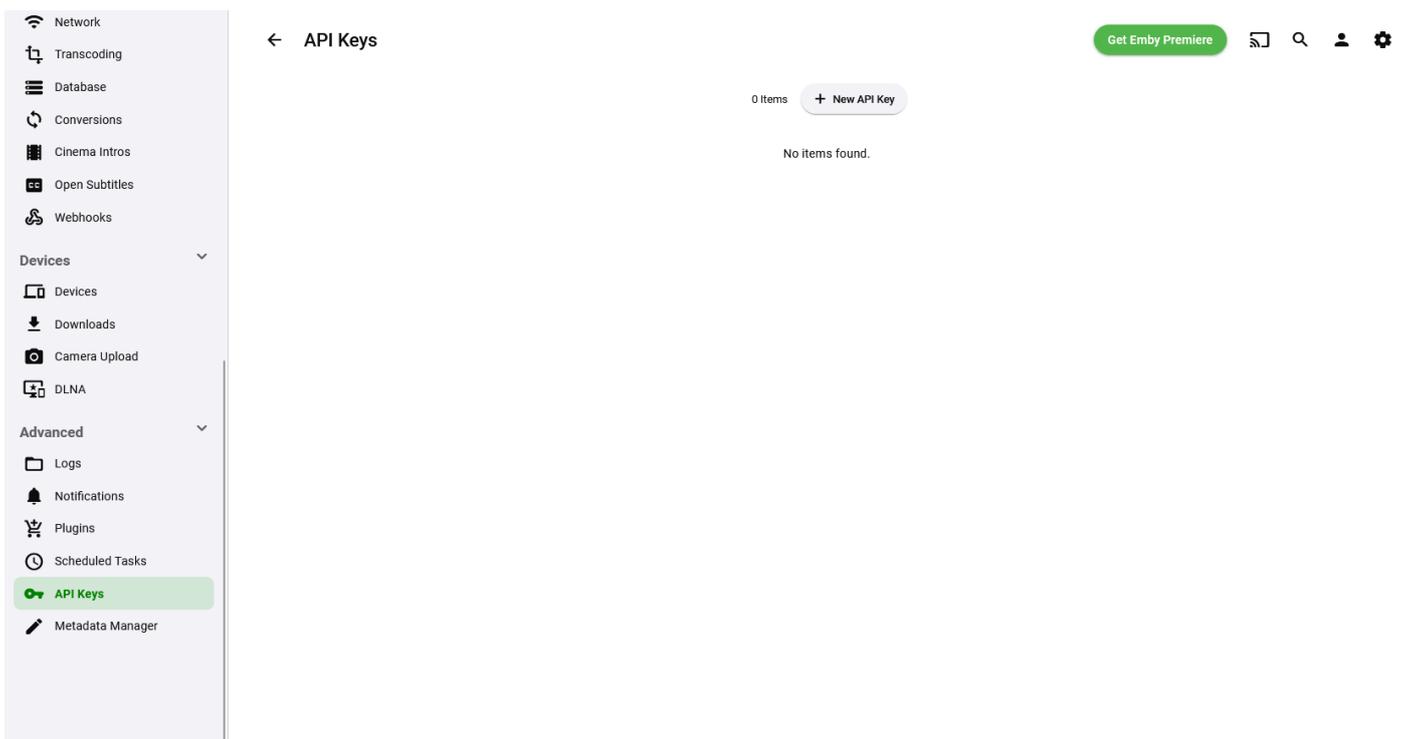

Write an App Name

← New API Key

App name

Example: Sickbeard, NzbDrone

Okay

## Now you can getting an API key

← API Keys

Get Emby Premiere



3 Items

+ New API Key



cf[REDACTED]04 - wisecp  
21/11/2023, 09:20:16



# Client Area

# Product Home Screen

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

The end customer, after logging in to his own customer panel, has access to the following information and options

- Link to the user manual (which was defined by the administrator when setting up the service.).
- Emby server address
- Authorization data
- User informations
- List of active devices
- List of enabled user libraries
- Drop all devices
- Change the Emby user password
- Add/Manage Emby Connect account
- Add/Management/Delete Media Account
- Drop Account Devices
- List of Media Accounts

Screenshot of the client area



- Details
- Additional Services
- Upgrade
- Cancellation Request

Order ID #187



Renew Now

General Information		Invoice #297
Service Group	Media	
Service Name	Emby Family1	
Services Status	Active	
Payment Period	Monthly	
Renewed On	03.07.2024	
Next Due Date	03.08.2024	
<b>Amount : 22zł</b>		

- User manual
- Web interface
- Drop All Devices
- Emby Connect

### Management Media User

Username 4-187

Status Enable

Password .....

Save

Emby Connect Username: Username not entered

- Libraries
- Movies
  - Cartoons
  - Sport
  - Movies
  - Beginner's Programming Course

Active Devices 10 Show Record Search

Device Name	App Name	Last Activity
No data available in table		

No Records Prev Next

Streaming bitrate limit 0 Mbps

### Media Accounts

Count of Media Account: 1 / 4

Add Media Account



4-187-thfghdh  
Emby Connect: on



# Manage Emby Connect

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Here you can add an Emby Connect Username for main user

If you leave the field empty, Emby Connect will be disabled.

Register the email in **Emby Connect**.

One Emby Connect username can only be linked to one Emby account.

---

Emby Connect Username:  

Libraries

 Turn Back

### Manage Emby Connect

**If you leave the field empty, Emby Connect will be disabled.**

Emby Connect Username

 Save

# Add Media Account

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### Add Media Account

Username

Password

Disable libraries:

- Movies
- Cartoons
- Sport
- Movies
- Business & Professional Courses

**Username** - Set a media account username. It consists of the username of the main account and a unique name for this media account.

**Password** - Write a password for registering the media account, or generate one by clicking Generate.

**Disable libraries** - Here are all the libraries available to the main account. If you want to restrict access for this media account to any of the libraries, simply select that library.


Press **Ctrl** to select multiple libraries.

Press **Shift** to select all libraries.

# Management Media account

## Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)



Enabled

---

**Username**  

---

**Password**   

---

**Disable libraries:**  Movies  Cartoons  Sport  Movies  Business & Professional Services

---

**Emby Connect Email:**

### Account Active Devices

Device Name	App Name	Last Activity
Google Chrome Windows	Emby Web	2024-07-04T11:54:56.0000000Z



**Enabled** - Update account status.

**Username** - Set a media account username. It consists of the username of the main account and a unique name for this media account.

**Password** - Write a password for registering the media account.

**Disable libraries** - Here are all the libraries available to the main account. If you want to restrict access for this media account to any of the libraries, simply select that library.

Press **Ctrl** to select multiple libraries.

Press **Shift+Ctrl** from top to bottom of list to select all libraries.

**Emby Connect Email** - add an Emby Connect Username for media account

If you leave the field empty, Emby Connect will be disabled.

Register the email in **Emby Connect**.

One Emby Connect username can only be linked to one Emby account.

## Media account active devices

Here is a list of active devices for this account.

Press "Drop Account Devices" to sign out from the devices.

### Account Active Devices

Device Name	App Name	Last Activity
Google Chrome Windows	Emby Web	2024-07-04T11:54:56.000000Z

 Drop Account Devices

# Admin Area

# Order Detail

Emby Family module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Navigate to the service you want to manage, then go to the '**Core**' tab.

Detail
 Core
 Blocks
 Order Addons
 Requirements
 Upgrade / Downgrade
 History

Cancellation / Refund

API Module PUQ Emby Family

Drop All Devices

API answer OK

Username: 4-187 Is Disabled : NO

Movies

Cartoons

Sport

Movies

Beginner's Programming Course

Emby Connect Username	Active Devices	Streaming bitrate limit
yulianoha@gmail.com	0	0 Mbps

Device Name	App Name	Last Activity
Enabled	Username	Emby Connect Username
	4-187-thfghdh	yulii.noha@puq.pl

Username 4-187

Password fstiYP6C

Server emby-test.uuq.pl

Overwrite package settings  Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server  To apply the changes on the server, it is necessary to check this checkbox.

Update

In the opened tab, you have a view of the online status of the service. The available online information includes:

- Connection status to the API
- Information about the Emby account on the **Emby** server
- Information about the account

Also, below are fields with the client's personal data.

You can also individually override package options for the client by checking the '**Overwrite package settings**' box.

After modifying the configuration options, check the '**Send changes to server**' box to save the data to the Emby server.

Username	4-187	Password	fstYP6C	Server	emby-test.uuq.pl
Server Group	Default (Servers: 1)	Use All Libraries	<input checked="" type="checkbox"/>	select all libraries together select all libraries together	
Username prefix	em-	Libraries	<input type="text"/> <small>IMPORTANT! Before writing any libraries here, read the instructions!</small>		
Username suffix	-by	Streaming bitrate limit	50	Mbps. Please provide number from 1 to 60	
Remote control	<input checked="" type="checkbox"/> Remote control of shared devices Remote control of shared devices	Media downloads	<input checked="" type="checkbox"/>	Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.	
Allow Playback Media	<input checked="" type="checkbox"/>	Allow Playback Audio	<input checked="" type="checkbox"/>	audio that requires transcoding audio that requires transcoding	
Allow Playback Video	<input type="checkbox"/> video that requires transcoding video that requires transcoding	Allow Playback Video	<input type="checkbox"/>	video that requires conversion without re-encoding video that requires conversion without re-encoding	
Allow Live TV access	<input checked="" type="checkbox"/>	Allow Live TV recording management	<input checked="" type="checkbox"/>		
Force transcoding of remote media sources such as Live TV	<input type="checkbox"/>	Count Of Media Accounts	4	Available number of media accounts for creation by user	
Link to instruction	<a href="https://doc.puq.info/books/emby-family-wisecp-module">https://doc.puq.info/books/emby-family-wisecp-module</a> <small>A link to the instruction will be reflected in the client area.</small>				
Overwrite package settings	<input checked="" type="checkbox"/>	Overwriting the package settings is necessary to personalize the service if you need it.			
Send changes to server	<input checked="" type="checkbox"/>	To apply the changes on the server, it is necessary to check this checkbox.			

Update