

Emby WISECP module

This module allows your company to provide public media services to customers through Emby accounts. It enables the creation of customer accounts on a pre-configured Emby server, allowing for the sale of media packages at different prices. It also integrates with the WISECP billing system for client data exchange, service activation, and blocking. The module relies on the Emby API for client account management, supports multiple languages, and offers administrators the ability to suspend, terminate, or unsuspend users, change passwords, and more. Clients can also manage their devices.

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
 - [Setup \(install/update\)](#)
 - [License Activation](#)
 - [Setup guide: Emby setup](#)
 - [Add server \(Emby server\)](#)
 - [Service configuration](#)
 - [Add new library/item in Emby](#)
 - [Getting Access Hash \(API key\)](#)
- [Client Area](#)
 - [Product Home Screen](#)
- [Admin Area](#)
 - [Order Detail](#)

Description

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Thanks to the module, the company is able to offer public media services to its customers based on Emby accounts.

The module is used to create customer accounts on the previously prepared Emby server. The module enables You to define multiple public media packages and sell them at different prices. The module creates a customer account according to the selected package. The client can have many independent accounts in the media.

For the correct operation of the module, a pre-prepared Emby installation is required (the module does not assist in the installation of the Emby server and assumes that such installation is ready for operation through API.) Module use Emby API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Emby server, including all installation steps such as PHP, Emby , SSL certificates etc.

Requirements:

WISECP: v3.1.5+, php: v8.x, IONCUBE: V12+

Emby: v4.7+

Functions:

- Auto create and deploy client account
- The module uses only the API to manage the accounts
- Module supports multilingualism (**Arabic, Bosnian, Czech, German, Greek, English, Spanish, Persian, French, Hungarian, Indonesian, Italian, Georgian, Latvian, Dutch, Polish, Portuguese, Romanian, Ukrainian**)
- The module shows all user info: enabled user libraries, active devices etc.

- [Link to instructions for setting up the service in the client area.](#)


Available options in the admin panel:


- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- Drop all devices
- API connection status
- List of active devices
- List of enabled user libraries

Available options in the client panel:


- List of active devices
- List of enabled user libraries
- Drop all devices
- Change the Emby user password

Screenshot of the client area

 Details

 Additional Services

 Upgrade

 Cancellation Request

Order ID
#120



Renew Now


General Information		Invoice #185
Service Group	Media	
Service Name	emby-test.uuq.pl	
Services Status	Active	
Payment Period	Monthly	
Renewed On	24.11.2023	
Next Due Date	24.12.2023	
Amount : 20zł		

User manual


Web interface

Drop All Devices


Management Media account


 Username


em-4-120-by

 Status

Enable


 Password

Generate




.....

Save

 Libraries

Cartoons

Movies

 Active Devices

10

▼

Show Record

Search


Device Name	App Name	Last Activity
Firefox Windows	Emby Web	2023-11-24T09:53:57.0000000Z
Google Chrome Windows	Emby Web	2023-11-24T09:47:35.0000000Z
Microsoft Edge Windows	Emby Web	2023-11-24T09:48:21.0000000Z

Showing records from 3 to 1 - 3

Prev

1

Next

 Streaming bitrate limit

50 Mbps

Screenshot of the Admin area

API Module

PUQ Emby

Drop All Devices

API answer OK

Username: em-4-120-by Is Disabled : NO

Movies

Active Devices

Streaming bitrate limit

3

50 Mbps

10

Show Record

Search

Device Name	App Name	Last Activity
Firefox Windows	Emby Web	2023-11-24T09:53:57.0000000Z
Google Chrome Windows	Emby Web	2023-11-24T09:47:35.0000000Z
Microsoft Edge Windows	Emby Web	2023-11-24T09:48:21.0000000Z

Showing records from 3 to 1 - 3

Prev

1

Next

Username

em-4-120-by

Password

Server

emby-test.uuq.pl123

Overwrite package settings

☐

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐

To apply the changes on the server, it is necessary to check this checkbox.

Update

Changelog

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

v1.1 Released 15-02-2024

- Introduced a "Show" button for displaying service passwords in the Client Area.
 - Fixed a bug with some cases where it was not possible to delete the server
 - Improved security
-

v1.0 Released 27-12-2023

First version

Installation and configuration guide

Setup (install/update)

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

1. Download the latest version of the module.

```
wget http://download.pugcloud.com/WISECP/Product/PUQ_WISECP-Emby/PUQ_WISECP-Emby-latest.zip
```

All versions are available: https://download.pugcloud.com/WISECP/Product/PUQ_WISECP-Emby/

2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Emby-latest.zip
```

3. Copy and Replace "puqEmby" from "PUQ_WISECP-Emby" to "WISECP_WEB_DIR/coremio/modules/Product/"

License Activation

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby

The screenshot displays the WISECP administrative interface. The top navigation bar includes links for Settings, Orders (5), Billing, Clients, Tools, WAnalytics, Support, Services, Site Management, Languages, and Help. The Services menu is expanded, showing options like Service Management, Hosting Management, Domain Name Registration, Software Services, Add Group, Module Settings (highlighted), Addons, and Order Requirements. Below the navigation bar, there are two summary cards: 'Today Sales (Turnover)' showing €0 for Yesterday, and 'Current Cash' showing €0 for Current Month Expenses. The main content area is titled 'Module Settings' and contains three cards: 'SSL Certificate' with a 'Manage' button, 'Product License' with a 'Manage' button, and 'Other' with a 'Manage' button.



Other

Initial Settings

All Modules

Search Within Modules

Write something...



PUQ Emby

PUQ Emby

PUQ Emby

PUQ Emby

PUQ Emby

PUQ Emby

Initial Settings

All Modules

PUQ Emby



License key

K13 [REDACTED] KJU

2023-12-21T14:45:22+01:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

Setup guide: Emby setup

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Install Emby on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Emby. All you need to do is run this command on your system

```
wget https://github.com/MediaBrowser/Emby.Releases/releases/download/4.7.14.0/emby-server-deb_4.7.14.0_amd64.deb
```

```
dpkg -i emby-server-deb_4.7.14.0_amd64.deb
```

2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d  
DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload  
nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

3. Configure nginx from a subdomain

Create a file named nginx.conf.

```
cd /etc/nginx/conf.d/  
nano nginx.conf
```

Then, insert the following text, replacing **DOMAIN_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate  
server {  
    listen 80;  
    #listen [::]:80;  
    server_name DOMAIN_NAME;  
  
    # Uncomment to redirect HTTP to HTTPS  
    return 302 https://$host$request_uri;  
}  
  
server {  
    listen 443 ssl http2;  
    #listen [::]:443 ssl http2;  
    server_name DOMAIN_NAME;  
  
    ## The default `client_max_body_size` is 1M, this might not be enough for some  
posters, etc.  
    client_max_body_size 20M;  
  
    # use a variable to store the upstream proxy  
    # in this example we are using a hostname which is resolved via DNS  
    # (if you aren't using DNS remove the resolver line and change the variable to point  
to an IP address e.g `set $emby 127.0.0.1`)  
    set $emby 127.0.0.1;  
    resolver 127.0.0.1 valid=30;  
  
    ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;  
    ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;  
    include /etc/letsencrypt/options-ssl-nginx.conf;  
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;  
    add_header Strict-Transport-Security "max-age=31536000" always;  
    ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;  
    ssl_stapling on;  
    ssl_stapling_verify on;
```

```

# Security / XSS Mitigation Headers
# NOTE: X-Frame-Options may cause issues with the webOS app
add_header X-Frame-Options "SAMEORIGIN";
add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
add_header X-Content-Type-Options "nosniff";

# COOP/COEP. Disable if you use external plugins/images/assets
add_header Cross-Origin-Opener-Policy "same-origin" always;
add_header Cross-Origin-Embedder-Policy "require-corp" always;
add_header Cross-Origin-Resource-Policy "same-origin" always;

# Permissions policy. May cause issues on some clients
add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()"
always;

# Tell browsers to use per-origin process isolation
add_header Origin-Agent-Cluster "?1" always;

# Content Security Policy
# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
# Enforces https content and restricts JS/CSS to origin
# External Javascript (such as cast_sender.js for Chromecast) must be
whitelisted.

# NOTE: The default CSP headers may cause issues with the webOS app
#add_header Content-Security-Policy "default-src https: data: blob:
http://image.tmdb.org; style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline'
https://www.gstatic.com https://www.youtube.com blob;; worker-src 'self' blob;; connect-src
'self'; object-src 'none'; frame-ancestors 'self'";

location = / {
    return 302 http://$host/web/;
    #return 302 https://$host/web/;
}

location / {

```

```

        # Proxy main Emby traffic
        proxy_pass http://$emby:8096;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;

        # Disable buffering when the nginx proxy gets very resource heavy upon
streaming
        proxy_buffering off;
    }

    # location block for /web - This is purely for aesthetics so /web/#!/ works instead
of having to go to /web/index.html/#!/
    location = /web/ {
        # Proxy main Emby traffic
        proxy_pass http://$emby:8096/web/index.html;
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;
    }

    location /socket {
        # Proxy Emby Websockets traffic
        proxy_pass http://$emby:8096;
        proxy_http_version 1.1;
        proxy_set_header Upgrade $http_upgrade;
        proxy_set_header Connection "upgrade";
        proxy_set_header Host $host;
        proxy_set_header X-Real-IP $remote_addr;
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
        proxy_set_header X-Forwarded-Proto $scheme;
        proxy_set_header X-Forwarded-Protocol $scheme;
        proxy_set_header X-Forwarded-Host $http_host;
    }

```

```
}
```

Restarting nginx

```
sudo service nginx restart
```




Add server (Emby server)

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Emby

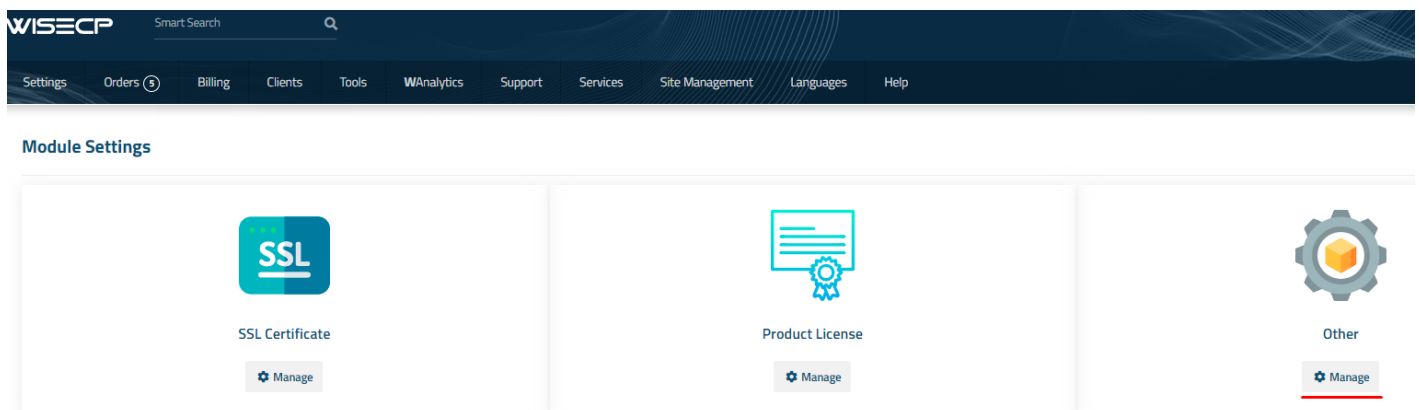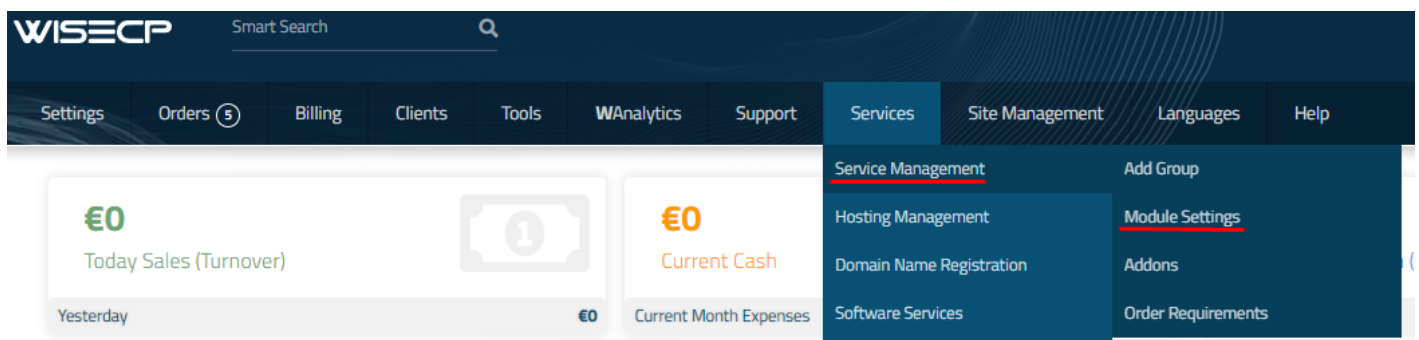

Other

Initial Settings

All Modules

Search Within Modules

Write something...

PUQ Emby

3. In the opened page, click the '**Add Server**' button.

Other

Dashboard / Module Settings / Other

Initial Settings

All Modules

PUQ Emby

License key

KJ3 [REDACTED] KJU

2023-12-21T14:45:22+01:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

Add New Server

Server Groups

Servers Emby

10

Show Record

Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
1	emby-test.uuq.pl	active	Default	✔	emby-test.uuq.pl	3/111	<div></div> <div></div>

Showing records from 1 to 1 - 1

Prev

1

Next

Turn Back

4. On the opened page, enter all the necessary information:

- Name:** Displayed name of the server.
- Maximum Number of Accounts:** The number of services that can be on this server.
- Server Group:** Optionally, choose the server group.

- **IP Address or Domain:** The address of the Emby server you are connecting to.
- **Username:** is the username for the account on [Emby](#).
- **Password:** is the password for the account on [Emby](#).
- **Access Hash:** API key that you created in the previous step on the Emby server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Add New Server

Name	emby-test.uuq.pl	
Maximum Number of Accounts	100	
Server Group	Default	
Default	<input type="checkbox"/> Set as default server in group	
IP Address or Domain	emby-test.uuq.pl	
Username	admin	
Password	<div>✓ Connection test Successful</div>	
	cf <div></div> 04	
Access Hash		
SSL	<input checked="" type="checkbox"/> Connect using SSL	
Port	443 <input type="checkbox"/> Change standard port	
Test Connection	<div>⚡ Test Connection</div>	

Add New Server

Service configuration

Emby module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.
2. Create New Service Group

Go to

Services -> Service Management -> Add Group

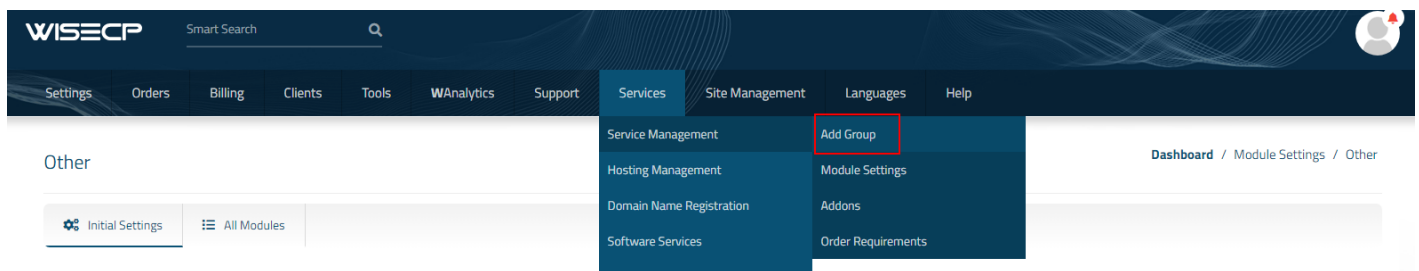

Enter all the necessary data and click the **'Create Group'** button.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

Create New Service Group

Dashboard / Create New Service Group

Create a new service group, you can also create new categories and manage the existing one from here.

ENUKRURDPTPLNLLVKAITIDHUFRAESLEDECSBSAR

Title

Media

Short Detail

Short Group Description

Listing Template

☒ Box List ☐ Horizontal List

Status

Enable

Background Image

(optional)

Group Colour

#FFFFFF

Order Upgrades

☐ Allow clients to upgrade to higher package in the same service group

External HTML Code

Paste your HTML code to this field (Optional)

You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty

3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

€0

Today Sales (Turnover)

Yesterday

€0

€0

Current Cash

Current Month Expenses

€0

0

Overdue Invoice (Total €0)

Payment Date Upcoming (Total €0 / Last 7 Days)

0

Client Registration (Today)

Yesterday

0

0

Pending Support Tickets

Total Resolved

0

0

Order in the Process (Total €0)

0

Reminder (Will Happen Today)

Service Management

Hosting Management

Domain Name Registration

Software Services


International SMS Services

Google SEO Services

VPN

Media

In the opened window, click the **'Create New Service'** button.

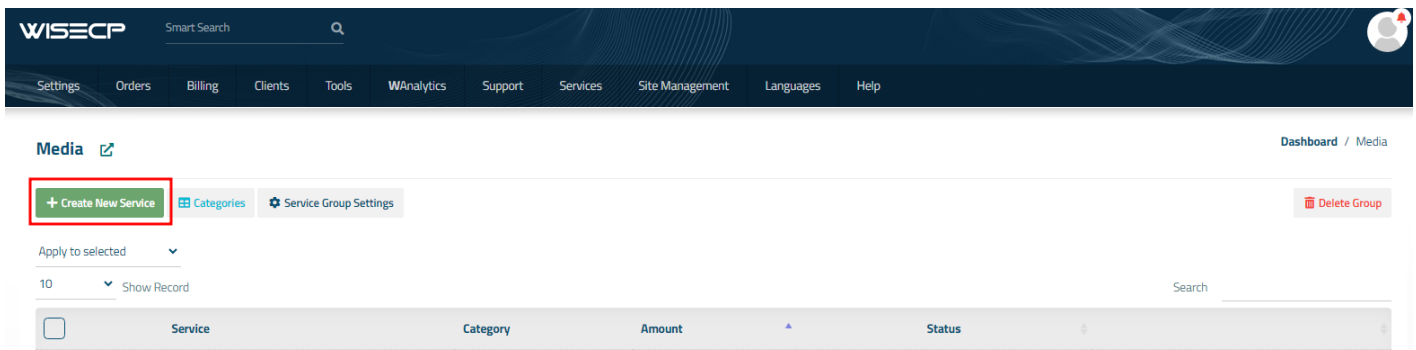

On the opened page, enter all the necessary details for your new service and navigate to the 'Core' tab.

Select the 'PUQ Emby' module from the drop-down list of modules.

Edit Service Pack For Media Dashboard / Media / emby-test.uuq.pl - Edit

Detail **Core** **+ Optional Addons** **Requirements** **Upgradeable Products** **Pricing** **Active Services**

Module: PUQ Emby

Server Group	Default (Servers: 1)	Use All Libraries	<input type="checkbox"/> select all libraries together
Username prefix	em- <small>Will be attached to the beginning of username. Only small letters and numbers and symbol "-"</small>	Libraries	Movies
Username suffix	-by <small>Will be appended to the end of username. Only small letters and numbers and symbol "-"</small>	Streaming bitrate limit	50 Mbps
Remote control	<input checked="" type="checkbox"/> Remote control of shared devices	Media downloads	<input checked="" type="checkbox"/> Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
Allow Playback Media	<input checked="" type="checkbox"/>	Allow Playback Audio	<input type="checkbox"/> audio that requires transcoding
Allow Playback Video	<input type="checkbox"/> video that requires transcoding	Allow Playback Video	<input type="checkbox"/> video that requires conversion without re-encoding
Allow Live TV access	<input type="checkbox"/>	Allow Live TV recording management	<input type="checkbox"/>
Force transcoding of remote media sources such as Live TV	<input type="checkbox"/>	Link to instruction	https://doc.puq.info/books/emby-wisecp-module <small>A link to the instruction will be reflected in the client area.</small>

Automatic Setup ☒ Please activate for automatic installation of the order. Otherwise, administrator approval is required.

Edit Product

4. Fill in the configuration options according to your preferences.

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.
(IMPORTANT! Start a new line for each new library)

Example:

"Movies

Beginner`s Programming Course

Comedy"

IMPORTANT!

If you have a folder named "-", please enter it not as the first one or rename it.

If you don't want any folder to be accessible, type "-".

User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client_id>-<service_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area

Add new library/item in Emby

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

New library:

To create a new library, you should to **create a folder** in your Emby server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```

LIBRARY_NAME - The name of the new library.

After creating a folder, let's create a library in Emby:

Add a new library:



Home

admin

Display

Home Screen

Playback

Subtitles

Password

Profile

Emby Web

Keyboard and Remote

Server

Dashboard

Settings

Users

Emby Premiere

Library

Live TV

Network

Transcoding

Database

←

Library

?

Libraries


Advanced


0 Libraries


+ New Library


↻ Scan Library Files

Get Emby Premiere









Assign the appropriate folder to this library:

☐ Show advanced settings

Content type:

Movies



Review the [Emby movie naming guide](#).

Display name:

Movies

Folders



Library Settings

Preferred metadata download language:



Country:



Preferred image download language:



Okay

← Select Path

Network paths can be entered manually in the event the Network button fails to locate your devices. For example, `\\server` or `\\192.168.1.101`.

For Linux on Arch Linux, CentOS, Debian, Fedora, OpenSuse, or Ubuntu, you must grant the Emby system user at least read access to your storage locations.

Folder:



(Optional) Shared network folder:

If this folder is shared on your network, supplying the network share path can allow Emby apps on other devices to access media files directly.

Okay

New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```



```
wget DOWNLOAD_ITEM_URL
```

LIBRARY_NAME - The name of the library.

DOWNLOAD_ITEM_URL - The download URL of the item you want to upload to the server.

After all

Scan all libraries by clicking on the "Scan All Libraries" button or by clicking on the three dots and selecting "Scan Library Files".

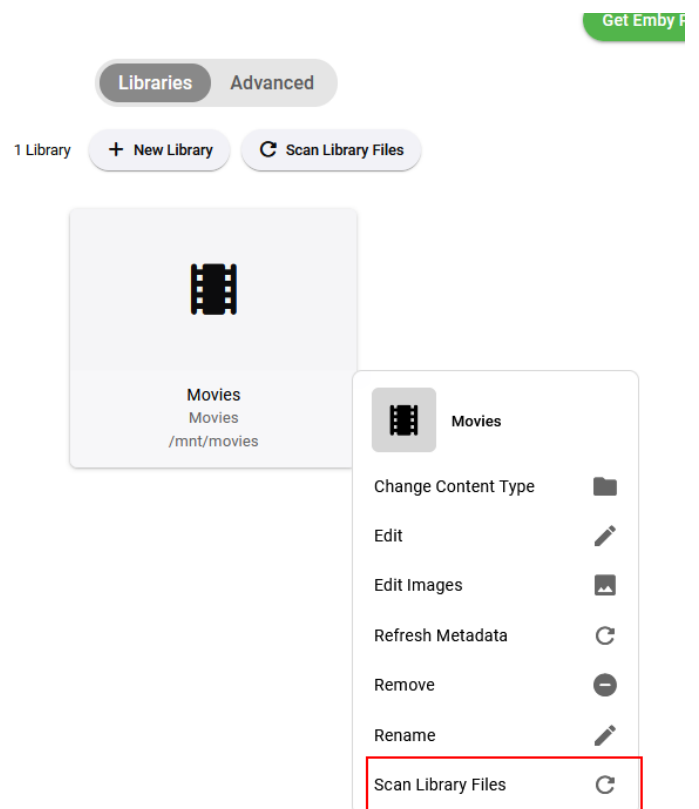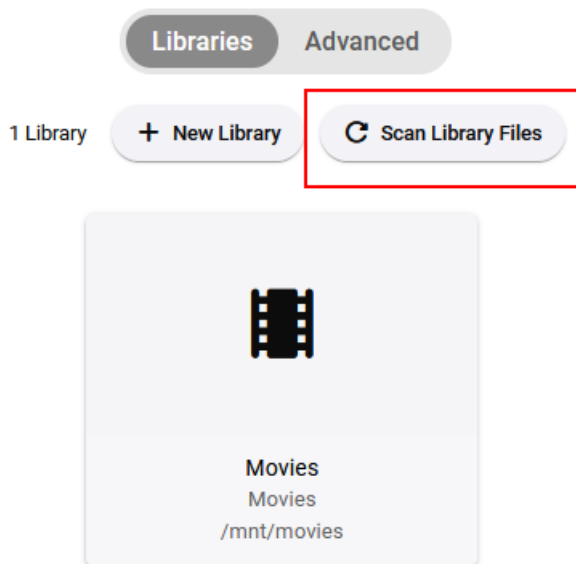

Getting Access Hash (API key)

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys

Create a new API Key

Network

Transcoding

Database

Conversions

Cinema Intros

Open Subtitles

Webhooks

Devices

Devices

Downloads

Camera Upload

DLNA

Advanced

Logs

Notifications

Plugins

Scheduled Tasks

API Keys

Metadata Manager

← API Keys

Get Emby Premiere

0 Items

+ New API Key

No items found.

Whrite an App Name

← New API Key

App name


Example: Sickbeard, NzbDrone

Okay

Now you can getting an API key

← API Keys

Get Emby Premiere



3 Items

+ New API Key



cf[REDACTED]04 - wisecp
21/11/2023, 09:20:16



Client Area

Product Home Screen

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

The end customer, after logging in to his own customer panel, has access to the following information and options

- Link to the user manual (which was defined by the administrator when setting up the service.).
- Emby server address
- Authorization data
- User informations
- List of active devices
- List of enabled user libraries
- Drop all devices
- Change the Emby user password

Screenshot of the client area

Details

Additional Services

Upgrade

Cancellation Request

Order ID
#120

Renew Now

General Information		Invoice #185
Service Group	Media	
Service Name	emby-test.uuq.pl	
Services Status	Active	
Payment Period	Monthly	
Renewed On	24.11.2023	
Next Due Date	24.12.2023	
Amount : 20zł		

User manual

Web interface

Drop All Devices

Management Media account

Username

em-4-120-by

Status

Enable

Password

Generate

.....

Save

Libraries

Cartoons

Movies

Active Devices

10

Show Record

Search

Device Name	App Name	Last Activity
Firefox Windows	Emby Web	2023-11-24T09:53:57.0000000Z
Google Chrome Windows	Emby Web	2023-11-24T09:47:35.0000000Z
Microsoft Edge Windows	Emby Web	2023-11-24T09:48:21.0000000Z

Showing records from 3 to 1 - 3

Prev1Next

Streaming bitrate limit

50 Mbps


Admin Area

Order Detail

Emby module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Navigate to the service you want to manage, then go to the '**Core**' tab.

 Drop All Devices

✓ API answer OK

Username: em-4-120-by Is Disabled : NO

Movies

Active Devices		Streaming bitrate limit
3		50 Mbps
10		
▼ Show Record		Search
Device Name	App Name	Last Activity
Firefox Windows	Emby Web	2023-11-24T09:53:57.0000000Z
Google Chrome Windows	Emby Web	2023-11-24T09:47:35.0000000Z
Microsoft Edge Windows	Emby Web	2023-11-24T09:48:21.0000000Z
Showing records from 3 to 1 - 3		
Prev 1 Next		

Username em-4-120-by

Password

Server

emby-test.uuq.pl123 ▼

Overwrite package settings

☐

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐

To apply the changes on the server, it is necessary to check this checkbox.

Update

In the opened tab, you have a view of the online status of the service. The available online information includes:

- Connection status to the API
- Information about the Emby account on the **Emby** server
- Information about the account

Also, below are fields with the client's personal data.

You can also individually override package options for the client by checking the '**Overwrite package settings**' box.

After modifying the configuration options, check the '**Send changes to server**' box to save the data to the Emby server.

Username	em-4-120-by	Password		Server	emby-test.uuq.pl123
Server Group	Default (Servers: 1)	Use All Libraries	<input type="checkbox"/>	select all libraries together	
Username prefix	em- <small>Will be attached to the beginning of username. Only small letters and numbers and symbol "-"</small>	Libraries	Movies		
Username suffix	-by <small>Will be appended to the end of username. Only small letters and numbers and symbol "-"</small>	Streaming bitrate limit	50 Mbps		
Remote control	<input checked="" type="checkbox"/> Remote control of shared devices	Media downloads	<input checked="" type="checkbox"/>	Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.	
Allow Playback Media	<input checked="" type="checkbox"/>	Allow Playback Audio	<input type="checkbox"/>	audio that requires transcoding	
Allow Playback Video	<input type="checkbox"/> video that requires transcoding	Allow Playback Video	<input type="checkbox"/>	video that requires conversion without re-encoding	
Allow Live TV access	<input type="checkbox"/>	Allow Live TV recording management	<input type="checkbox"/>		
Force transcoding of remote media sources such as Live TV	<input type="checkbox"/>	Link to instruction	https://doc.puq.info/books/emby-wisecp-module <small>A link to the instruction will be reflected in the client area.</small>		
Overwrite package settings	<input checked="" type="checkbox"/>	Overwriting the package settings is necessary to personalize the service if you need it.			
Send changes to server	<input checked="" type="checkbox"/>	To apply the changes on the server, it is necessary to check this checkbox.			

Update