

# Client area overview

## Jellyfin Family module **WHMCS**

[Order now](#) | [Download](#) | [Community](#)

The client opens their Jellyfin Family service from **clientarea.php** → **My Services** → **(service)** → **Information**. The page loads its data over AJAX and renders a set of cards.

The screenshot displays the Jellyfin management interface. At the top, a header bar shows a play button icon, the account ID '1-54699-my-1782672462', and the text 'Jellyfin media account' with an 'Enabled' status indicator. Below this are four action buttons: 'Web interface', 'User manual', 'Drop All Devices', and 'Unlock'. The main content is divided into two columns. The left column, titled 'Account', shows fields for 'Username' (1-54699-my-1782672462), 'Password' (masked with dots), and 'Status' (Enabled). The right column, titled 'Info', displays system metrics: 'Streaming bitrate limit' (12 Mbps), 'Active Sessions' (0 (Unlimited)), 'Failed Login Attempt' (0 / 3), and 'Sync Play Access' (Enabled). Below these are sections for 'Libraries' (3 items) with buttons for 'Movies', 'Music', and 'Playlists', and 'Active Devices' (0 items) with a 'No active devices' message.

## Actions

- **Web interface** — opens the Jellyfin web UI in a new tab.
- **User manual** — opens the instruction URL configured on the product (if set).
- **Drop All Devices** — signs the account out of every device (confirmation required).
- **Unlock** — re-enables the account when it has been locked/disabled (shown only when disabled).

# Account

- **Username** with a copy button.
- **Password** — shown as a reveal button, plain text, or hidden, depending on the product's *Show password* setting; with a copy button.
- **Status** — Enabled / Disabled badge.

# Info


- Streaming bitrate limit, active sessions (with the max), failed-login attempts (with the lockout threshold), and SyncPlay access.

# Libraries & Devices

- **Libraries** — chips for each library the user can access (with a count badge).
- **Active Devices** — table of device name, app and last activity (with a count badge).

# Media Accounts

When the product allows media accounts, a **Media Accounts** card lists the client's sub-users with a `used / limit` count badge.

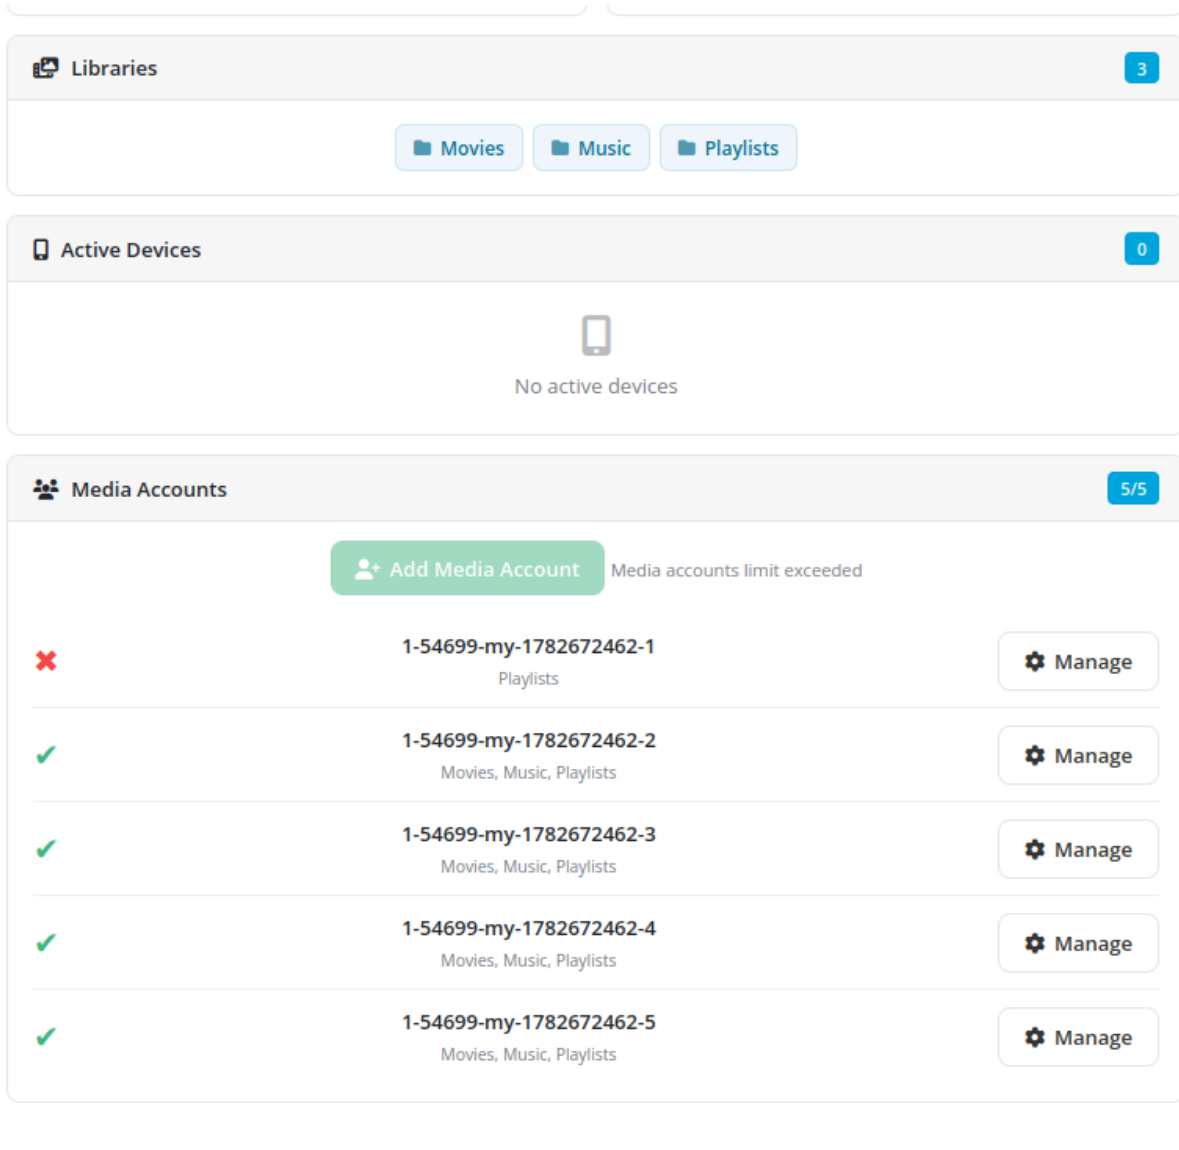

- **Add Media Account** — opens a modal to enter a username (the main username is prefixed automatically), generate a password and tick which libraries the sub-user may access. Disabled once the limit is reached.
- **Manage** (per media account) — opens a modal to enable/disable the sub-user, change its password (leave empty to keep the current one), adjust its libraries, view and **drop its active devices**, or **delete** the media account (confirmation required).

A media account's available libraries are always a subset of the main account's libraries, and it inherits the product's playback/transcoding/feature settings.

All actions use AJAX and report the result with a toast notification — the page never reloads.

Revision #2

Created 1 July 2026 19:03:26 by Ruslan

Updated 1 July 2026 19:03:38 by Ruslan