

Jellyfin WHMCS module

This module enables your company to offer public media services to customers through Jellyfin accounts. It facilitates the creation of customer accounts on a pre-configured Jellyfin server, allowing for the sale of various media packages at different prices. The module requires a pre-installed Jellyfin server and uses the Jellyfin API for client account management. It also supports multiple languages. Administrators can suspend, terminate, or unsuspend users, change user passwords, and more, while clients can manage their devices and libraries.

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
 - [WHMCS setup\(install/update\)](#)
 - [Setup guide: Jellyfin setup](#)
 - [Setup guide: WHMCS setup](#)
 - [Add server \(Jellyfin server\)](#)
 - [Product Configuration](#)
 - [Add new library/item in Jellyfin](#)
 - [Getting Access Hash \(API key\)](#)
- [Client Area](#)
 - [Home screen](#)
- [Admin Area](#)
 - [Product Information](#)

Description

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

Thanks to the module, the company is able to offer public media services to its customers based on Jellyfin accounts.

The module is used to create customer accounts on the previously prepared Jellyfin server. The module enables You to define multiple public media packages and sell them at different prices. The module creates a customer account according to the selected package. The client can have many independent accounts in the media.

For the correct operation of the module, a pre-prepared Jellyfin installation is required (the module does not assist in the installation of the Jellyfin server and assumes that such installation is ready for operation through API.) Module use Jellyfin API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Jellyfin server, including all installation steps such as PHP, Jellyfin, SSL certificates etc.

Functions:

- Auto create and deploy client account
- The module uses only the API to manage the accounts
- Module supports multilingualism (**Arabic, Azerbaijani, Catalan, Chinese, Croatian, Czech, Danish, Dutch, English, Estonian, Farsi, French, German, Hebrew, Hungarian, Italian, Macedonian, Norwegian, Polish, Romanian, Spanish, Swedish, Turkish, Ukrainian**)
- The module shows all user info: enabled user libraries, active devices etc.
- Link to instructions for setting up the service in the client area.

Available options in the admin panel:

- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- Drop all devices
- Unblock user
- API connection status
- List of active devices
- List of enabled user libraries


Available options in the client panel:

- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password

WHMCS minimal version: 8 +

Jellyfin minimal version: 10+

- ★ Overview ^
- i Information
- ✂ Actions ^
- 🔑 Change Password
- ⚙️ Drop All Devices
- 🔓 Unblock
- 🔄 Request Cancellation



Jellyfin
Jellyfin

ACTIVE

Registration Date
Monday, July 8th, 2024

Recurring Amount
1.00 EUR

Billing Cycle
Monthly

Next Due Date
Thursday, August 8th, 2024

Payment Method
PayPal

🔄 Request Cancellation

🌐 Manage

[User manual](#) [Web interface](#)

👤 Username: 7-5220 📄

🔒 Password: B.rw46h61oFA.L 📄

👤 Status: Enable

📁 Libraries: Movies Playlists

✖ Failed Login Attempt: 0/3

👤 Active Sessions: 0/3

👤 Active Devices: 1

Device Name	App Name	Last Activity
Chrome	Jellyfin Web	2024-07-09T10:48:34.903698Z

👤 Streaming bitrate limit: 60 Mbps

🔄 Sync Play Access: Allow to create and join groups

Jellyfin

Order # 678 - View Order

Product/Service

Server

Domain

Dedicated IP

Username

Password

Status

Registration Date

Quantity

First Payment Amount

Recurring Amount Recalculate on Save No

Next Due Date

Termination Date

Billing Cycle

Payment Method

Promotion Code

Module Commands

API Connection status API answer OK

User Username: jelly-7-5026-fin Is Disabled : NO

Libraries

Streaming bitrate limit	Active Devices	Failed Login Attempt	Sync Play Access
50 Mbps	1/10	0/3	Allow user to create and join groups

Device Name	App Name	Last Activity
Chrome	Jellyfin Web	2023-11-02T13:03:05.4481492Z

Changelog

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

v2.1 Released 03-10-2025

1. Adding availability to create a rule about custom username
2. Adding availability to create a rule about custom password
3. Supported php8.2+ version

You should save the 'Module Setting' in your products for the module to function correctly.

v2.0.1 Released 19-12-2024

1. Added validation check in the hook related to the Client Area Primary Sidebar.

v2.0 Released 24-09-2024

Module is coded ionCube v13

Supported php version:

- php 7.4 WHMCS 8.11.0 -
- php 8.1 WHMCS 8.11.0 +
- php 8.2 WHMCS 8.11.0 +

v1.5.1 Released 13-08-2024

1. Fixed bug with password, when "Show password" is "no"

v1.5 Released 12-07-2023

1. Client area more adapted for mobile version
 2. Buttons for copying login and password have been added to the client area
-

v1.4 Released 18-12-2023

Client Area Enhancements:

1. Added the ability to disable the display of service passwords by default.
2. Introduced a "Show" button for displaying service passwords in the Client Area.
3. Provided options to display service passwords in plain text.

You should save the 'Module Setting' in your products for the module to function correctly.

v1.3 Released 18-12-2023

1. Fix some bugs
 2. Fixed a bug on the client area related to displaying the session count
 3. Support **Jellyfin 10.8.13**
-

v1.2 Released 17-11-2023

1. Fixed bug with incorrect libraries selection functionality, CRITICAL
2. Fix some bugs in the change password feature.
3. New "**Use All Libraries**" checkbox in Module Setting page.
4. Some change in Client Area.
5. Optimized

You should reconfigure the 'Module Setting' in your product for the module to function correctly. Additionally, it's recommended to select 'Change Package' in the customer product settings."

v1.1 Released 09-11-2023

1. Library functionality has been modified. Now, when configuring the module, entering "-" signifies "No libraries selected," while leaving the field empty indicates "Select all libraries."
 2. Some bugs have been fixed.
-

v1.0 Released 03-11-2023

First version

Installation and configuration guide

WHMCS

setup(install/update)

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

Module is coded ionCube v13

Supported php version:

- php 7.4 WHMCS 8.11.0 -
- php 8.1 WHMCS 8.11.0 +
- php 8.2 WHMCS 8.11.0 +

To install and update a module, you must perform one and the same action.

1. Download the latest version of the module.

PHP 8.2

```
wget http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/php82/PUQ_WHMCS-Jellyfin-latest.zip
```

PHP 8.1

```
wget http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/php81/PUQ_WHMCS-Jellyfin-latest.zip
```

PHP 7.4

```
wget http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/php74/PUQ_WHMCS-Jellyfin-
```

```
latest.zip
```

All versions are available via link:

http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/

2. Unzip the archive with the module.

```
unzip PUQ_WHMCS-Jellyfin-latest.zip
```

3. Copy and Replace "puqJellyfin" to "WHMCS_WEB_DIR/modules/servers/"

Setup guide: Jellyfin setup

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

1. Install Jellyfin on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Jellyfin. All you need to do is run this command on your system

```
wget -O- https://repo.jellyfin.org/install-debuntu.sh | sudo bash
```

2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d  
DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload  
nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

3. Configure nginx from a subdomain

Create a file named jellyfin.conf.

```
cd /etc/nginx/conf.d/  
nano jellyfin.conf
```

Then, insert the following text, replacing **DOMAIN_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate
server {
    #listen 80;
    #listen [::]:80;
    #server_name DOMAIN_NAME;

    # Uncomment to redirect HTTP to HTTPS
    #return 301 https://$host$request_uri;
}

server {
    #listen 443 ssl http2;
    #listen [::]:443 ssl http2;
    #server_name DOMAIN_NAME;

    ### The default `client_max_body_size` is 1M, this might not be enough for some posters, etc.
    #client_max_body_size 20M;

    # use a variable to store the upstream proxy
    # in this example we are using a hostname which is resolved via DNS
    # (if you aren't using DNS remove the resolver line and change the variable to point to an IP
    address e.g `set $jellyfin 127.0.0.1`)
    #set $jellyfin 127.0.0.1;
    #resolver 127.0.0.1 valid=30;

    #ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;
    #ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;
    #include /etc/letsencrypt/options-ssl-nginx.conf;
    #ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;
    #add_header Strict-Transport-Security "max-age=31536000" always;
    #ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;
    #ssl_stapling on;
    #ssl_stapling_verify on;

    # Security / XSS Mitigation Headers
    # NOTE: X-Frame-Options may cause issues with the webOS app
    #add_header X-Frame-Options "SAMEORIGIN";
    #add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
```

```

[]add_header X-Content-Type-Options "nosniff";

[]# COOP/COEP. Disable if you use external plugins/images/assets
[]add_header Cross-Origin-Opener-Policy "same-origin" always;
[]add_header Cross-Origin-Embedder-Policy "require-corp" always;
[]add_header Cross-Origin-Resource-Policy "same-origin" always;

[]# Permissions policy. May cause issues on some clients
[]add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()" always;

[]# Tell browsers to use per-origin process isolation
[]add_header Origin-Agent-Cluster "?1" always;

[]# Content Security Policy
[]# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
[]# Enforces https content and restricts JS/CSS to origin
[]# External Javascript (such as cast_sender.js for Chromecast) must be whitelisted.
[]# NOTE: The default CSP headers may cause issues with the webOS app
[]add_header Content-Security-Policy "default-src https: data: blob: http://image.tmbd.org;
style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline' https://www.gstatic.com
https://www.youtube.com blob:; worker-src 'self' blob:; connect-src 'self'; object-src
'none'; frame-ancestors 'self' ";

[]location = / {
[]return 302 http://$host/web/;
[]#return 302 https://$host/web/;
[]}

[]location / {
[]# Proxy main Jellyfin traffic
[]proxy_pass http://$jellyfin:8096;
[]proxy_set_header Host $host;
[]proxy_set_header X-Real-IP $remote_addr;
[]proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
[]proxy_set_header X-Forwarded-Proto $scheme;

```

```

proxy_set_header X-Forwarded-Protocol $scheme;
proxy_set_header X-Forwarded-Host $http_host;

# Disable buffering when the nginx proxy gets very resource heavy upon streaming
proxy_buffering off;
}

# location block for /web - This is purely for aesthetics so /web/# / works instead of having
to go to /web/index.html/# /
location = /web/ {
# Proxy main Jellyfin traffic
proxy_pass http://$jellyfin:8096/web/index.html;
proxy_set_header Host $host;
proxy_set_header X-Real-IP $remote_addr;
proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
proxy_set_header X-Forwarded-Proto $scheme;
proxy_set_header X-Forwarded-Protocol $scheme;
proxy_set_header X-Forwarded-Host $http_host;
}

location /socket {
# Proxy Jellyfin Websockets traffic
proxy_pass http://$jellyfin:8096;
proxy_http_version 1.1;
proxy_set_header Upgrade $http_upgrade;
proxy_set_header Connection "upgrade";
proxy_set_header Host $host;
proxy_set_header X-Real-IP $remote_addr;
proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
proxy_set_header X-Forwarded-Proto $scheme;
proxy_set_header X-Forwarded-Protocol $scheme;
proxy_set_header X-Forwarded-Host $http_host;
}
}

```

Restarting nginx

```
sudo service nginx restart
```


Setup guide: WHMCS setup

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

1. Download the latest version of the module.

PHP 8.1

```
wget http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/PUQ_WHMCS-Jellyfin-latest.zip
```

PHP 7.4

```
wget http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/php74/PUQ_WHMCS-Jellyfin-latest.zip
```

All versions are available via link:

http://download.puqcloud.com/WHMCS/servers/PUQ_WHMCS-Jellyfin/

2. Unzip the archive with the module.

```
unzip PUQ_WHMCS-Jellyfin-latest.zip
```

3. Copy "puqJellyfin" to "WHMCS_WEB_DIR/modules/servers/"

4. Create new server Jellyfin in WHMCS (System Settings->Products/Services->Servers)

```
System Settings->Servers->Add New Server
```

- Enter the correct **Name** and **Hostname**

Name	<input type="text" value="jellyfir [REDACTED]"/>
Hostname	<input type="text" value="jellyfi [REDACTED]"/>
IP Address	<input type="text"/>
Assigned IP Addresses (One per line)	<div style="border: 1px solid #ccc; height: 100px;"></div>
Monthly Cost	<input type="text"/>
Datacenter/NOC	<input type="text"/>
Maximum No. of Accounts	<input type="text" value="200"/>
Server Status Address	<input type="text"/> <small>To display this server on the server status page, enter the full path to the folder (required to be uploaded to each server you want to monitor) - e.g. https://www.example.com/status/</small>
Enable/Disable	<input type="checkbox"/> Check to disable this server

- In the **Server Details** section, select the "**PUQ Jellyfin**" module and enter the correct **username**, **password** and **access hash (API key)** for the **Jellyfin web interface**.
- To check, click the "**Test connection**" button

Module	PUQ Jellyfin	<input type="button" value="Test Connection"/>
✓ Connection successful. Some values have been auto-filled.		
Username	admin	
Password	
Access Hash	4 [REDACTED]c	
Secure	<input checked="" type="checkbox"/> Check to use SSL Mode for Connections	
Port	443	<input type="checkbox"/> Override with Custom Port

5. Create a new Products/Services

System Settings->Products/Services->Create a New Product

In the **Module settings** section, select the **"PUQ Jellyfin"** module

Edit Product

Details Pricing Module Settings Custom Fields Configurable Options Upgrades Free Domain Cross-sells Other Links

Module Name: PUQ Jellyfin
Server Group: jellyfin-test.uuq.pl

License key: 3U44YP-CNZZCX-FFQDIU-X1ISF7-ARIKWZ
success: 2026-04-15T11:59:03+02:00

Libraries Configuration

Use All Libraries: select all libraries together

Playlists
Movies

Write down the libraries you want to make available to customers of this product.
(IMPORTANT! Start a new line for each new library)
Example:
"Movies
Beginner's Programming Course
Comedy"

Libraries:

IMPORTANT!
If you have a folder named "-", please enter it not as the first one or rename it. If you don't want any folder to be accessible, type "-".

Allow playback

media:
audio that requires transcoding:
video that requires transcoding:
video that requires conversion without re-encoding:

Links

Instruction: <https://doc.puq.info/books/jellyfin-whmcs-r>
A link to the instruction will be reflected in the client area.

User Configuration

Streaming bitrate limit: 60
Mbps. Please provide number from 1 to 60

SyncPlay access: Allow user to create and join groups
Sync playback with other devices

Remote control: Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)

Media downloads: Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.

User sessions: 3
value of 0 will disable the feature.

Failed login attempts: 3
before user is locked out. Setting this to -1 will disable the feature.

Username prefix: jelly-
Will be attached to the beginning of username. Only small letters and numbers and symbol "-"

Username suffix: -fin
Will be appended to the end of username. Only small letters and numbers and symbol "-"

Feature access

Allow Live TV access:
Allow Live TV recording management:
Force transcoding of remote media sources such as Live TV:

Client Area

Show Password: Plain text
Show service password in the client area

5:1234567890ABDabd*!_

Password Generation:
Set the password length and the allowed letters/numbers/symbols for the password.
Format: "8:234abcdABCD", where 8 is the password length, and everything after the colon represents the allowed characters.

Username Format: Username generated by custom user
{user_id}-{random_letter_7}
{user_id}, {service_id}, {random_digit_x}, {random_letter_x}

Custom Username:
Unix time: {unixtime} Year: {year}, Month: {month}, Day: {day}, Hour: {hour}, Minute: {minute}, Second: {second}

Switch to Advanced Mode

Automatically setup the product as soon as an order is placed
 Automatically setup the product as soon as the first payment is received
 Automatically setup the product when you manually accept a pending order
 Do not automatically setup this product

Save Changes Cancel Changes

- **License key:** A pre-purchased license key for the "PUQ Jellyfin" module. For the module to work correctly, the key must be active

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.
(IMPORTANT! Start a new line for each new library)

Example:

"Movies

Beginner`s Programming Course

Comedy"

IMPORTANT!

If you have a folder named "-", please enter it not as the first one or rename it.
If you don't want any folder to be accessible, type "-".

User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **SyncPlay access:** The SyncPlay feature enables to sync playback with other devices. Select the level of access this user has to the SyncPlay
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **User sessions:** Set the maximum number of simultaneous user sessions.
A value of 0 will disable the feature.
- **Failed login attempts:** Determine how many incorrect login tries can be made before lockout occurs.
A value of zero means inheriting the default of three tries for normal users and five for administrators. Setting this to -1 will disable the feature.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client_id>-<service_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area

Client Area

- **Show Password** - Show the service password in the client area.
- **Password Generation** - Set the password length and the allowed letters/numbers/symbols for the password.
Format: `"8: 234abcdABCD"`, where `8` is the password length, and everything after the colon represents the allowed characters.
- **Username Format** - Define the format for username generation:
 - **Standard** - prefix-client_id-service_id-suffix
 - **Custom** - username generated by a custom rule
- **Custom Username** - Set a rule for generating a custom username.

Add server (Jellyfin server)

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

Add a new server to the system WHMCS.

System Settings->Servers->Add New Server

- Enter the correct **Name** and **Hostname**

Name	<input type="text" value="jellyfin [REDACTED]"/>
Hostname	<input type="text" value="jellyfi [REDACTED]"/>
IP Address	<input type="text"/>
Assigned IP Addresses (One per line)	<div style="border: 1px solid #ccc; height: 100px;"></div>
Monthly Cost	<input type="text"/>
Datacenter/NOC	<input type="text"/>
Maximum No. of Accounts	<input type="text" value="200"/>
Server Status Address	<input type="text"/> <small>To display this server on the server status page, enter the full path to the folder (required to be uploaded to each server you want to monitor) - e.g. https://www.example.com/status/</small>
Enable/Disable	<input type="checkbox"/> Check to disable this server

- In the **Server Details** section, select the "**PUQ Jellyfin**" module and enter the correct **username**, **password** and **access hash (API key)** for the **Jellyfin web interface**
- To check, click the "**Test connection**" button

Module	PUQ Jellyfin	<input type="button" value="Test Connection"/>
✓ Connection successful. Some values have been auto-filled.		
Username	admin	
Password	
Access Hash	4 [REDACTED]c	
Secure	<input checked="" type="checkbox"/> Check to use SSL Mode for Connections	
Port	443	<input type="checkbox"/> Override with Custom Port

Installation and configuration guide

Product Configuration

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

Create a new Products/Services

System Settings->Products/Services->Create a New Product

In the **Module settings** section, select the "**PUQ Jellyfin**" module

Edit Product

Details	Pricing	Module Settings	Custom Fields	Configurable Options	Upgrades	Free Domain	Cross-sells	Other	Links
Module Name		PUQ Jellyfin							
Server Group		jellyfin-test.uuq.pl							
License key		3U44YP-CNZZCX-FFQDIU-X1ISF7-ARIKWZ success: 2026-04-15T11:59:03+02:00							
Libraries Configuration		<p>Use All Libraries: <input type="checkbox"/> select all libraries together</p> <div><p>Playlists</p><p>Movies</p></div> <p>Write down the libraries you want to make available to customers of this product. (IMPORTANT! Start a new line for each new library) Example: "Movies Beginner's Programming Course Comedy"</p> <p>IMPORTANT! If you have a folder named "-", please enter it not as the first one or rename it. If you don't want any folder to be accessible, type "-".</p>							
Allow playback		<p>media: <input type="checkbox"/></p> <p>audio that requires transcoding: <input checked="" type="checkbox"/></p> <p>video that requires transcoding: <input type="checkbox"/></p> <p>video that requires conversion without re-encoding: <input type="checkbox"/></p>							
Links		<p>Instruction: <input type="text" value="https://doc.puq.info/books/jellyfin-whmcs-r"/></p> <p>A link to the instruction will be reflected in the client area.</p>							
User Configuration		<p>Streaming bitrate limit: <input type="text" value="60"/> Mbps. Please provide number from 1 to 60</p> <p>SyncPlay access: <input type="checkbox"/> Allow user to create and join groups Sync playback with other devices</p> <p>Remote control: <input type="checkbox"/> Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)</p> <p>Media downloads: <input checked="" type="checkbox"/> Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.</p> <p>User sessions: <input type="text" value="3"/> A value of 0 will disable the feature.</p> <p>Failed login attempts: <input type="text" value="3"/> before user is locked out. Setting this to -1 will disable the feature.</p> <p>Username prefix: <input type="text" value="jelly-"/> Will be attached to the beginning of username. Only small letters and numbers and symbol "-"</p> <p>Username suffix: <input type="text" value="-fin"/> Will be appended to the end of username. Only small letters and numbers and symbol "-"</p>							
Feature access		<p>Allow Live TV access: <input type="checkbox"/></p> <p>Allow Live TV recording management: <input checked="" type="checkbox"/></p> <p>Force transcoding of remote media sources such as Live TV: <input type="checkbox"/></p>							
Client Area		<p>Show Password: <input type="text" value="Plain text"/> Show service password in the client area</p> <p>Password Generation: <input type="text" value="5:1234567890ABDabd*!"/> Set the password length and the allowed letters/numbers/symbols for the password. Format: "8:234abcdABCD", where 8 is the password length, and everything after the colon represents the allowed characters.</p> <p>Username Format: <input type="text" value="Username generated by custom user"/> {user_id}-{random_letter_7} {user_id}, {service_id}, {random_digit_x}, {random_letter_x}</p> <p>Custom Username: <input type="text"/> Unix time: {unixtime} Year: {year}, Month: {month}, Day: {day}, Hour: {hour}, Minute: {minute}, Second: {second}</p>							
<p><input type="checkbox"/> Automatically setup the product as soon as an order is placed</p> <p><input checked="" type="checkbox"/> Automatically setup the product as soon as the first payment is received</p> <p><input type="checkbox"/> Automatically setup the product when you manually accept a pending order</p> <p><input type="checkbox"/> Do not automatically setup this product</p>									
Switch to Advanced Mode									
<p><input type="button" value="Save Changes"/> <input type="button" value="Cancel Changes"/></p>									

- **License key:** A pre-purchased license key for the "PUQ Jellyfin" module. For the module to work correctly, the key must be active

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.
(IMPORTANT! Start a new line for each new library)

Example:

"Movies

Beginner`s Programming Course

Comedy"

IMPORTANT!

If you have a folder named "-", please enter it not as the first one or rename it.
If you don't want any folder to be accessible, type "-".

User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **SyncPlay access:** The SyncPlay feature enables to sync playback with other devices. Select the level of access this user has to the SyncPlay
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **User sessions:** Set the maximum number of simultaneous user sessions. A value of 0 will disable the feature.
- **Failed login attempts:** Determine how many incorrect login tries can be made before lockout occurs. A value of zero means inheriting the default of three tries for normal users and five for administrators. Setting this to -1 will disable the feature.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client_id>-<service_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area

Client Area

- **Show Password** - Show the service password in the client area.
- **Password Generation** - Set the password length and the allowed letters/numbers/symbols for the password.
Format: `"8: 234abcdABCD"`, where `8` is the password length, and everything after the colon represents the allowed characters.
- **Username Format** - Define the format for username generation:
 - **Standard** - prefix-client_id-service_id-suffix
 - **Custom** - username generated by a custom rule
- **Custom Username** - Set a rule for generating a custom username.

Add new library/item in Jellyfin

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

New library:

To create a new library, you should to **create a folder** in your jellyfin server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```


LIBRARY_NAME - The name of the new library.


After creating a folder, let's create a library in Jellyfin:

Add a new library:

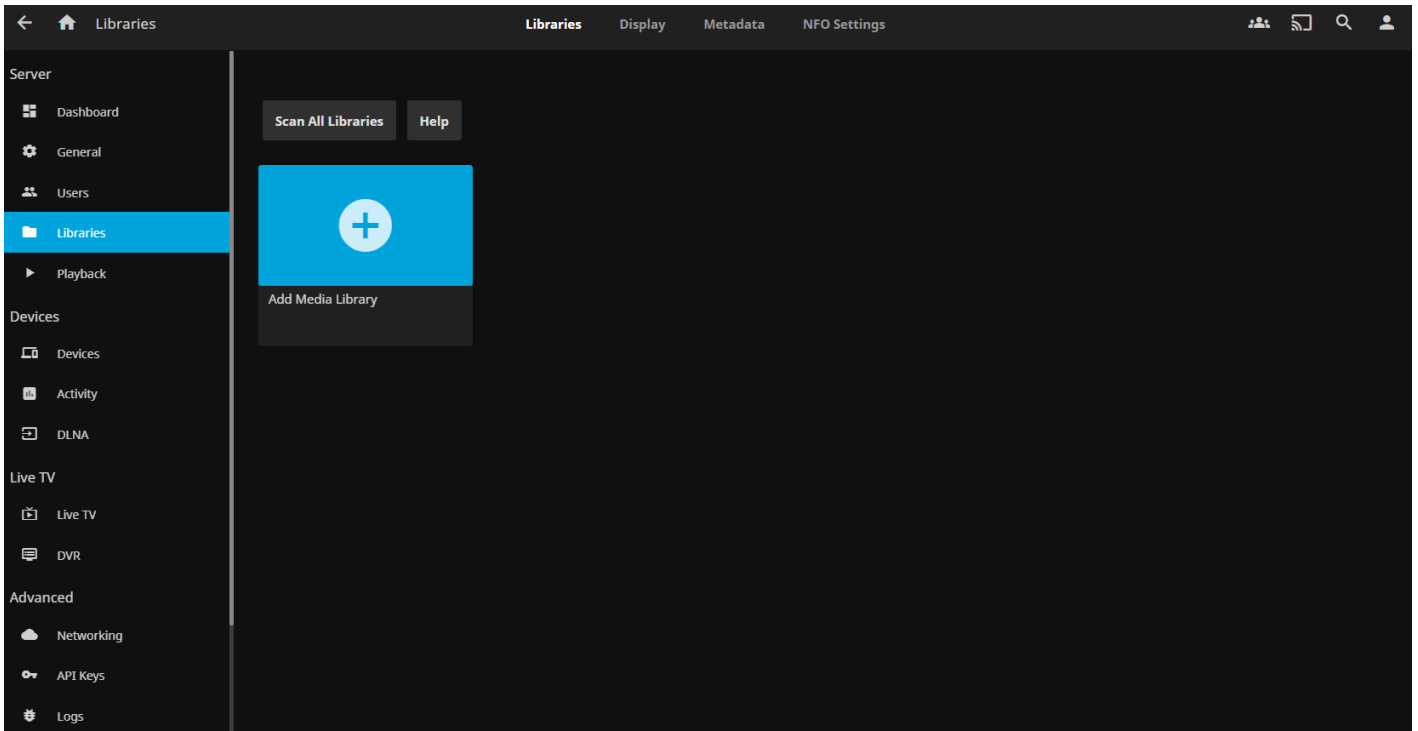

Assign the appropriate folder to this library:

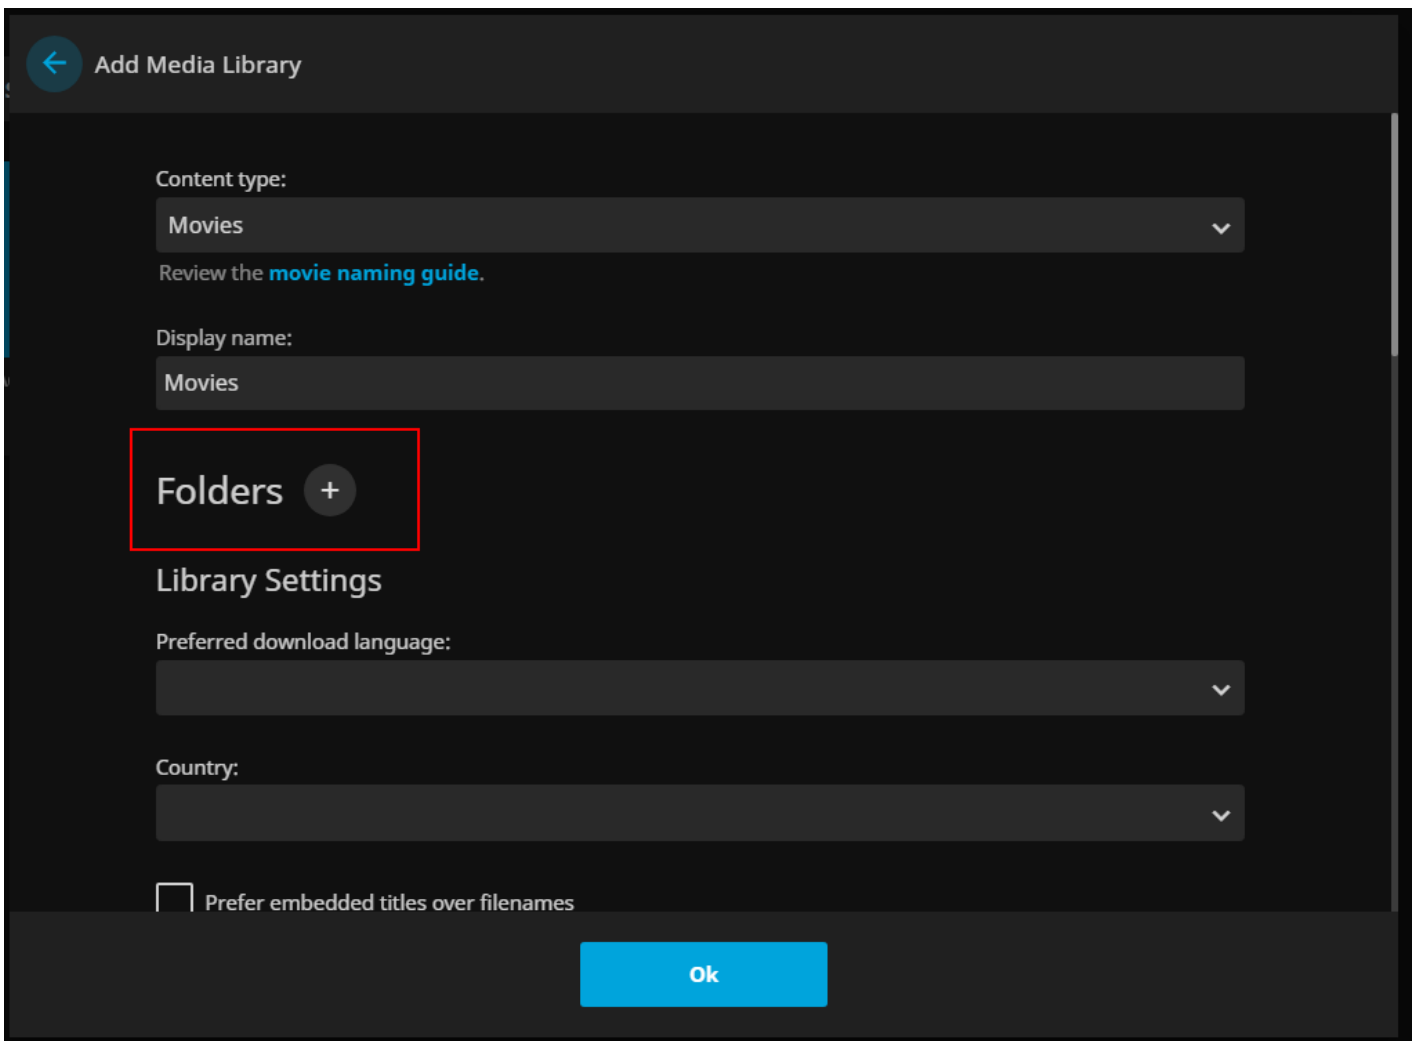

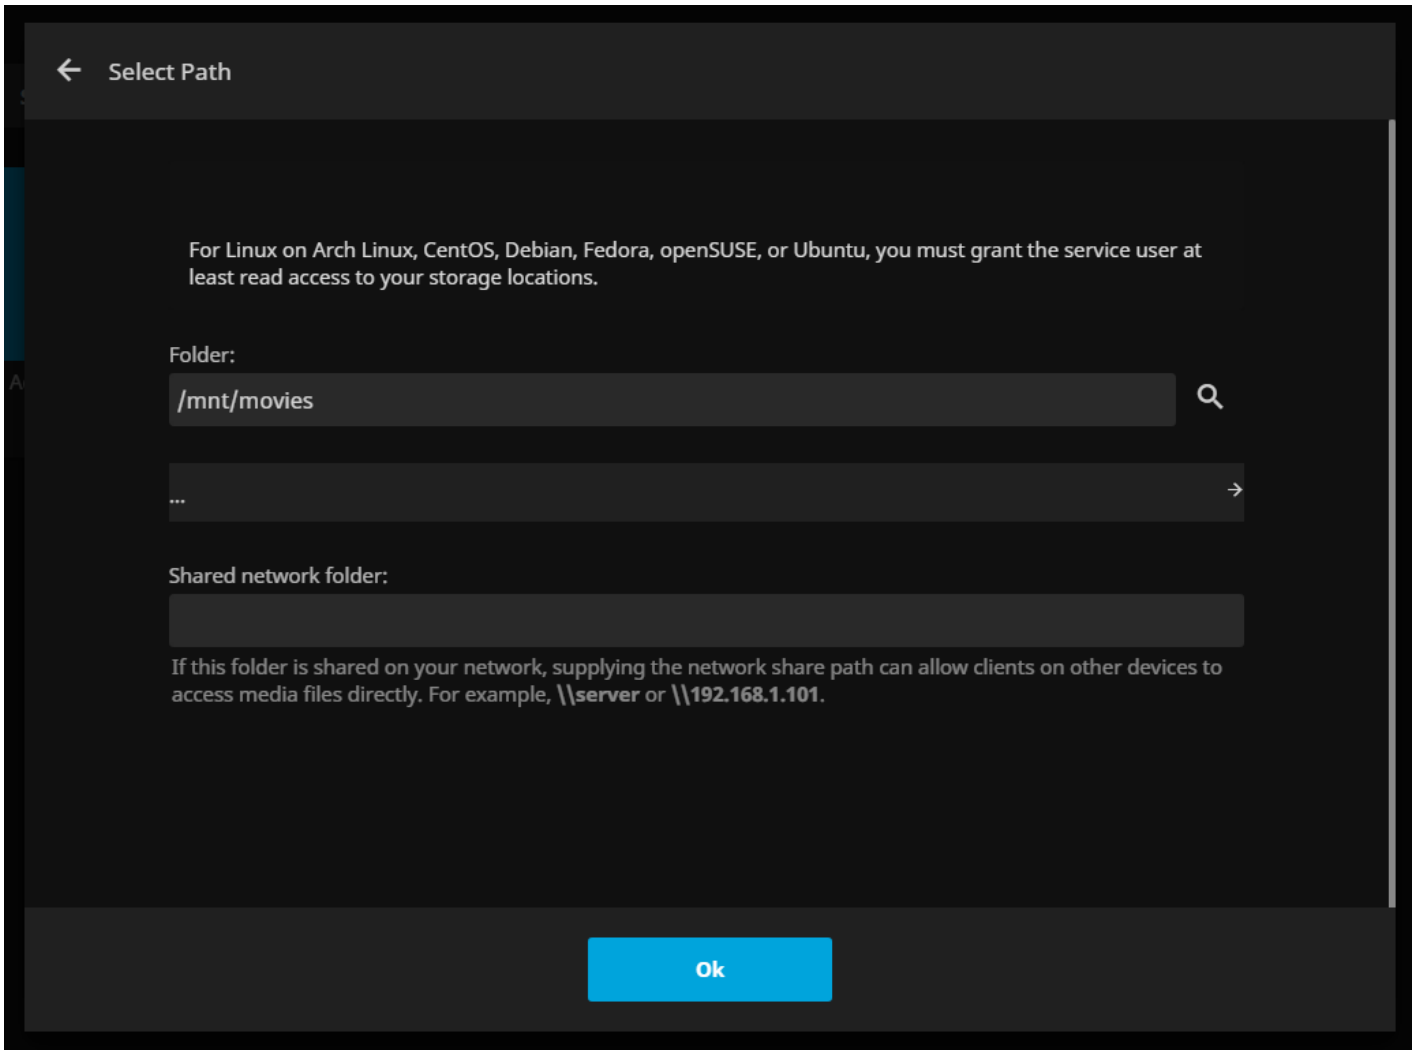

New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```


```
wget DOWNLOAD_ITEM_URL
```

LIBRARY_NAME - The name of the library.

DOWNLOAD_ITEM_URL - The download URL of the item you want to upload to the server.

After all

Scan all libraries by clicking on the "Scan All Libraries" button or by clicking on the three dots and selecting "Scan Library".

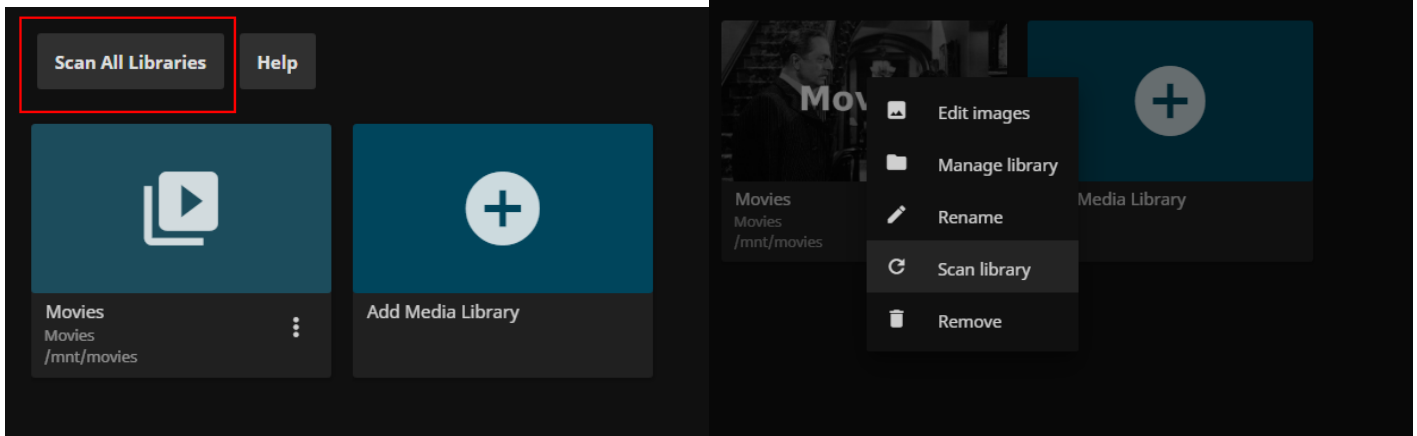


Getting Access Hash (API key)

Jellyfin module **WHMCS**


[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys


Create a new API Key

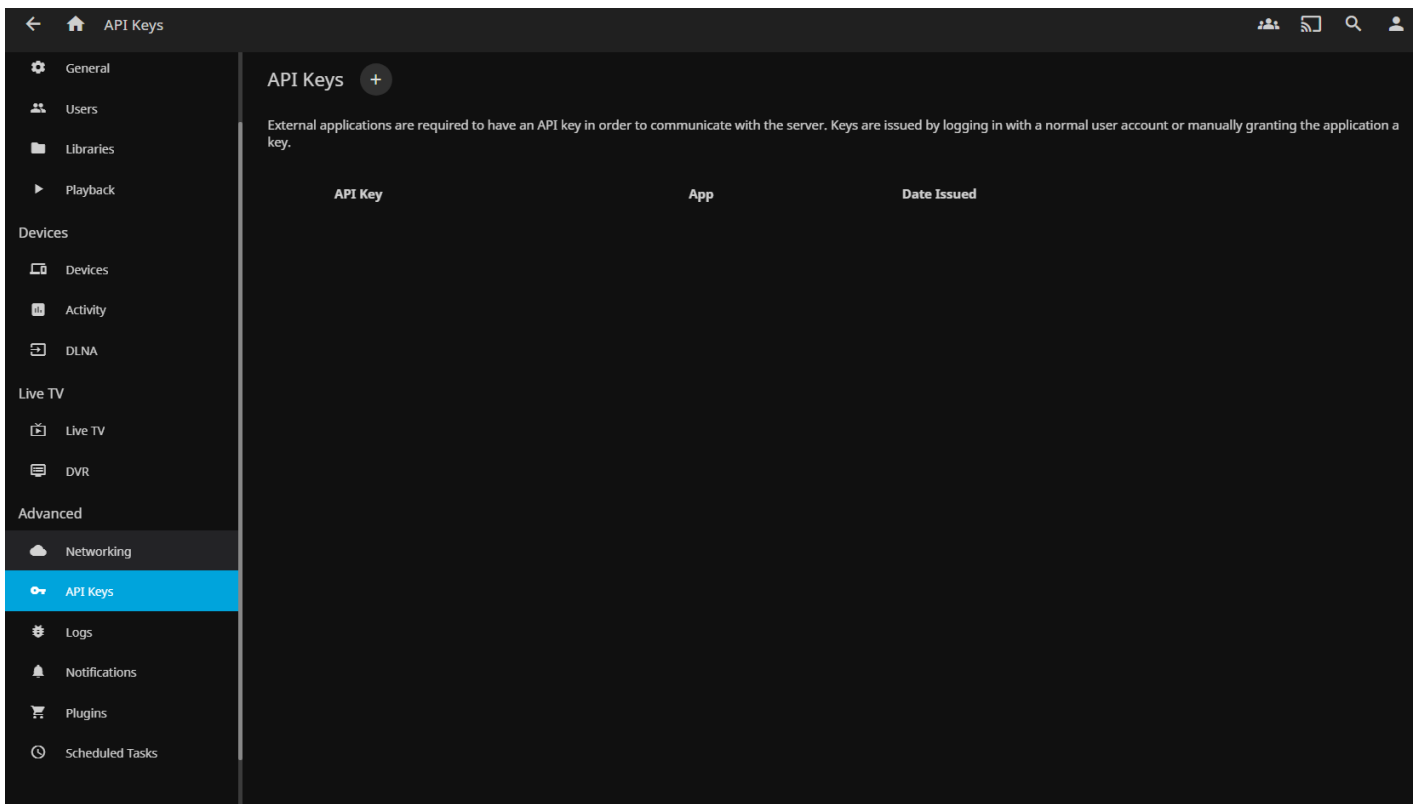

Whrite an App Name

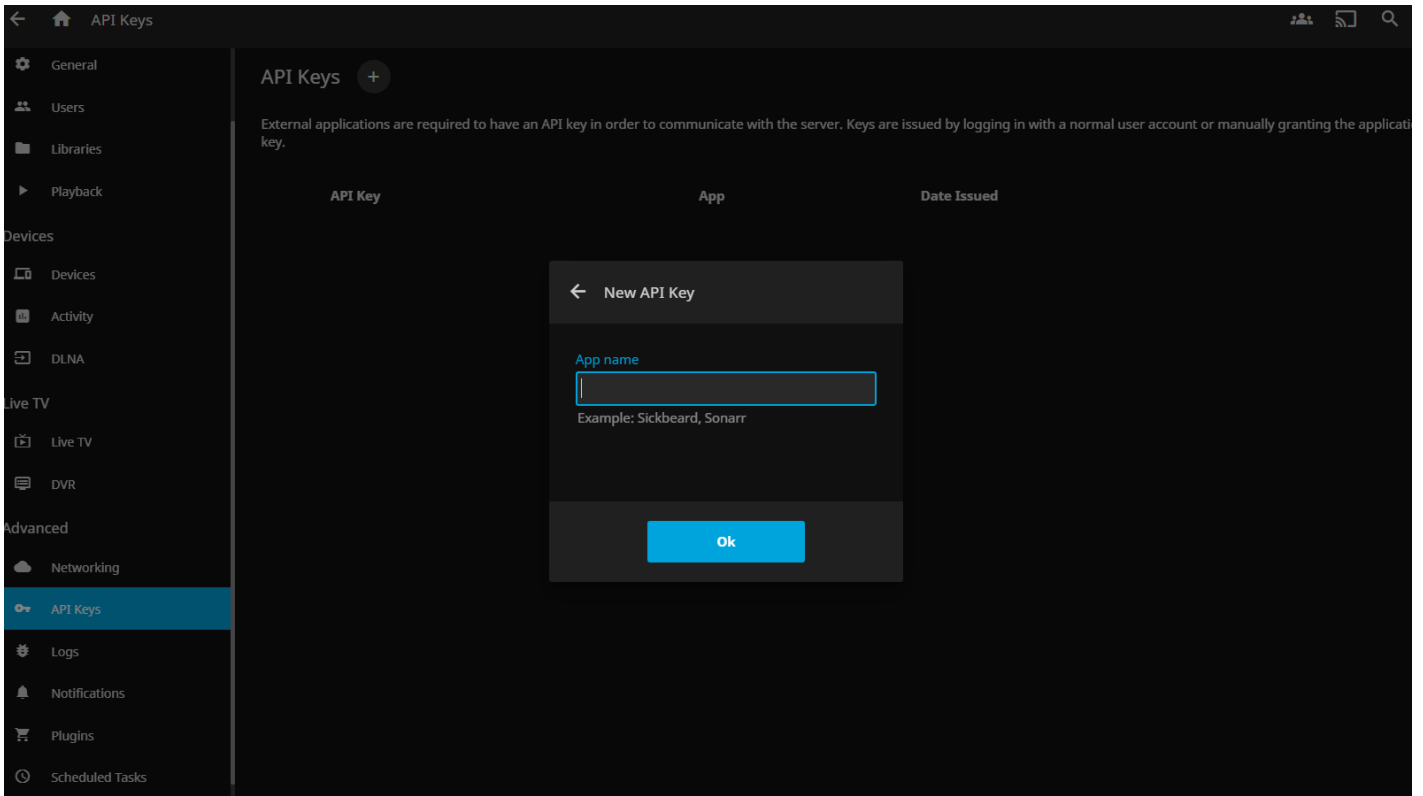

Now you can getting an API key

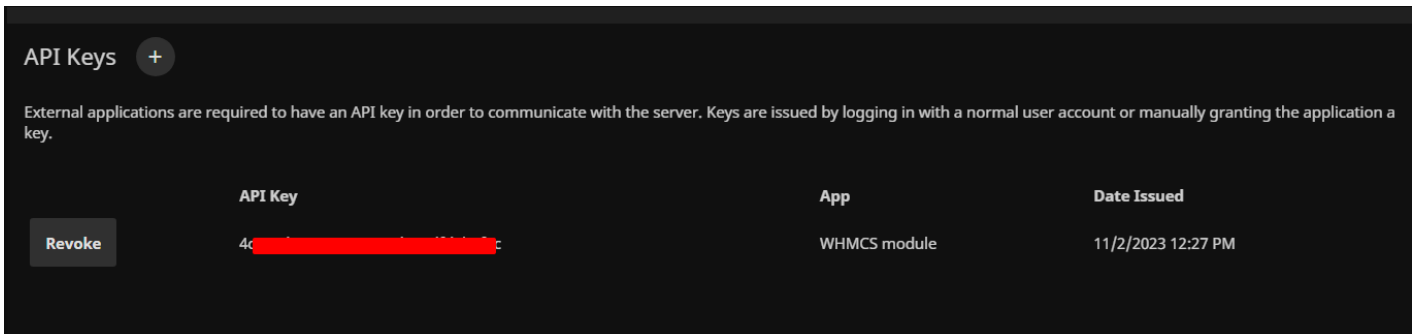

Client Area

Home screen

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

The end customer, after logging in to his own customer panel, has access to the following information and options

- Link to the user manual (which was defined by the administrator when setting up the service.).
- Jellyfin server address
- Authorization data
- User informations
- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password

★ Overview ^

i Information

🔧 Actions ^

🔑 Change Password

⚙️ Drop All Devices

🔓 Unblock

🔄 Request Cancellation



Jellyfin
Jellyfin

ACTIVE

🔄 Request Cancellation

Registration Date

Monday, July 8th, 2024

Recurring Amount

1.00 EUR

Billing Cycle

Monthly

Next Due Date

Thursday, August 8th, 2024

Payment Method

PayPal

🌐 Manage



User manual



Web interface

👤 Username: 7-5220

🔒 Password: B.rw46h61oFA.L

👤 Status: **Enable**

📁 Libraries:

✖ Failed Login Attempt: 0/3

👥 Active Sessions: 0/3

👤 Active Devices: 1

Device Name	App Name	Last Activity
Chrome	Jellyfin Web	2024-07-09T10:48:34.903698Z

👤 Streaming bitrate limit: 60 Mbps

🔄 Sync Play Access: Allow to create and join groups

Powered by WHMCompleteSolution

Admin Area

Product Information

Jellyfin module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

Here is the data presented for the service admin in WHMCS

Summary Profile Users Contacts Products/Services Domains Billable Items Invoices Quotes Transactions Tickets Emails Notes (0) Log

Jellyfin Go + New Addon More ▾

Order #	678 - View Order	Registration Date	<input type="text" value="2023/11/02"/>								
Product/Service	Jellyfin	Quantity	<input type="text" value="1"/>								
Server	jellyfin-test.uuq.pl (2/200 Accounts)	First Payment Amount	<input type="text" value="1.00"/>								
Domain	<input type="text"/>	Recurring Amount	<input type="text" value="1.00"/> <small>Recalculate on Save</small> <input type="checkbox"/> No								
Dedicated IP	<input type="text"/>	Next Due Date	<input type="text" value="2023/12/02"/>								
Username	jelly-7-5026-fin	Termination Date	<input type="text"/>								
Password	U8::wh98tKij6	Billing Cycle	Monthly								
Status	Active	Payment Method	Bank Transfer								
Module Commands	Create Suspend Unsuspend Terminate Change Package Change Password Drop All Devices Unblock										
API Connection status	<input checked="" type="checkbox"/> API answer OK										
User	<input checked="" type="checkbox"/> Username: jelly-7-5026-fin Is Disabled : NO										
Libraries	Movies										
Info	<table><thead><tr><th>Streaming bitrate limit</th><th>Active Devices</th><th>Failed Login Attempt</th><th>Sync Play Access</th></tr></thead><tbody><tr><td>50 Mbps</td><td>1/10</td><td>0/3</td><td>Allow user to create and join groups</td></tr></tbody></table>			Streaming bitrate limit	Active Devices	Failed Login Attempt	Sync Play Access	50 Mbps	1/10	0/3	Allow user to create and join groups
Streaming bitrate limit	Active Devices	Failed Login Attempt	Sync Play Access								
50 Mbps	1/10	0/3	Allow user to create and join groups								
Active Devices	<table><thead><tr><th>Device Name</th><th>App Name</th><th>Last Activity</th></tr></thead><tbody><tr><td>Chrome</td><td>Jellyfin Web</td><td>2023-11-02T13:03:05.4481492Z</td></tr></tbody></table>			Device Name	App Name	Last Activity	Chrome	Jellyfin Web	2023-11-02T13:03:05.4481492Z		
Device Name	App Name	Last Activity									
Chrome	Jellyfin Web	2023-11-02T13:03:05.4481492Z									