Service configuration

Jellyfin module **WISECP**

Order now | Download | FAQ


> If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.


2. Create New Service Group

Go to

```
Services -> Service Management -> Add Group
```

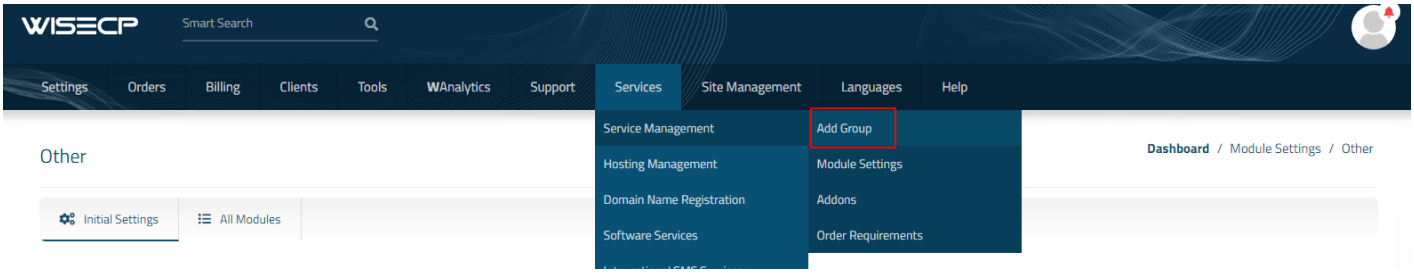


Enter all the necessary data and click the '**Create Group**' button.

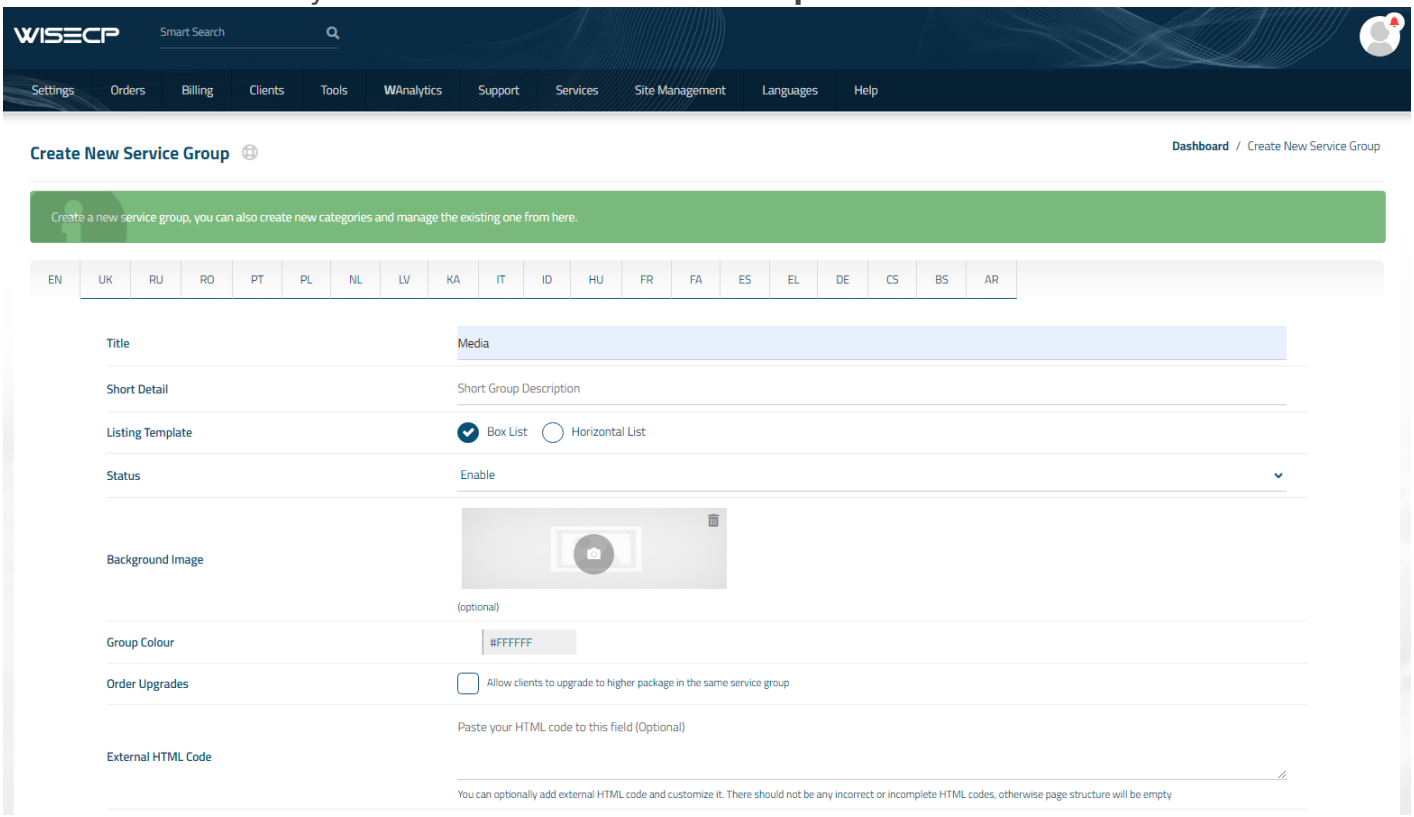


3. Adding a New Service

Go to

```
Services -> our service group where you need to add the new service.
```

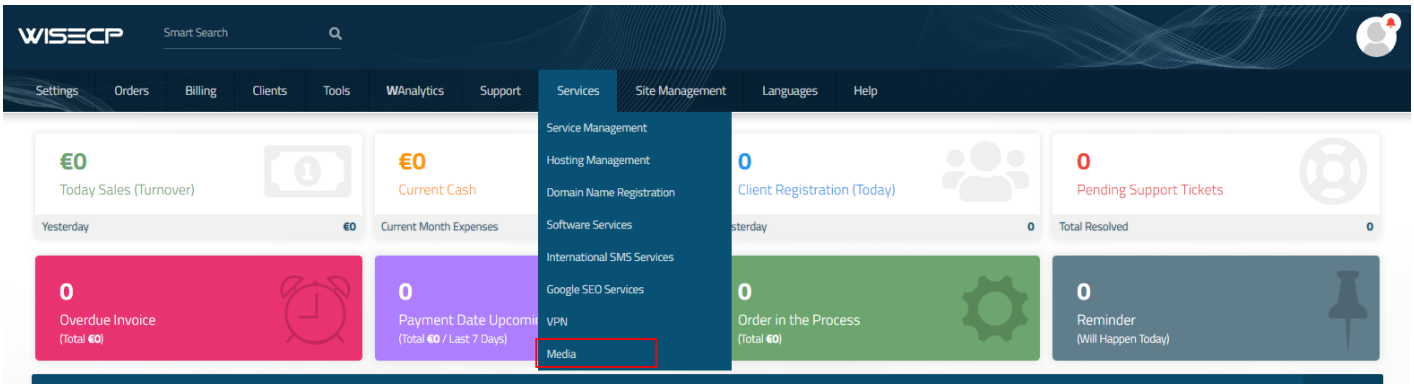


In the opened window, click the '**Create New Service**' button.

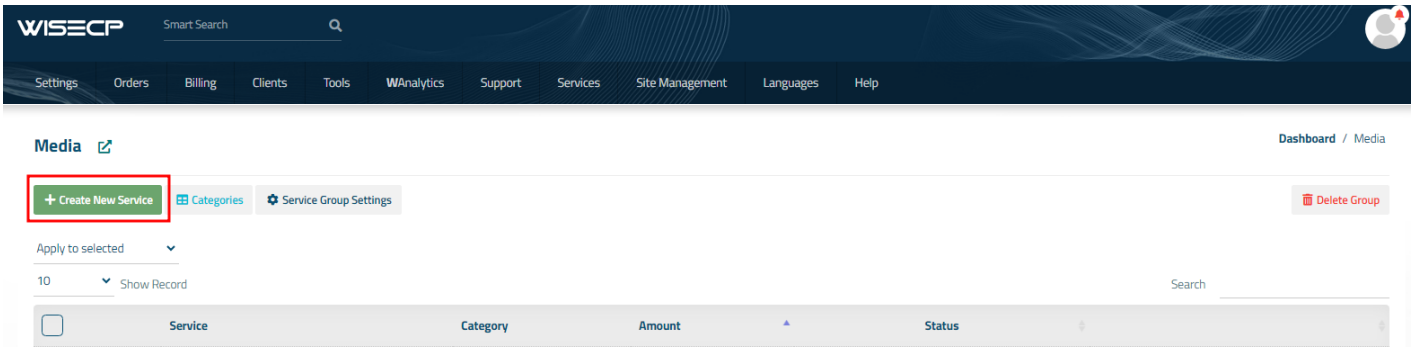

On the opened page, enter all the necessary details for your new service and navigate to the '**Core** ' tab.

Select the '**PUQ Jellyfin**' module from the drop-down list of modules.

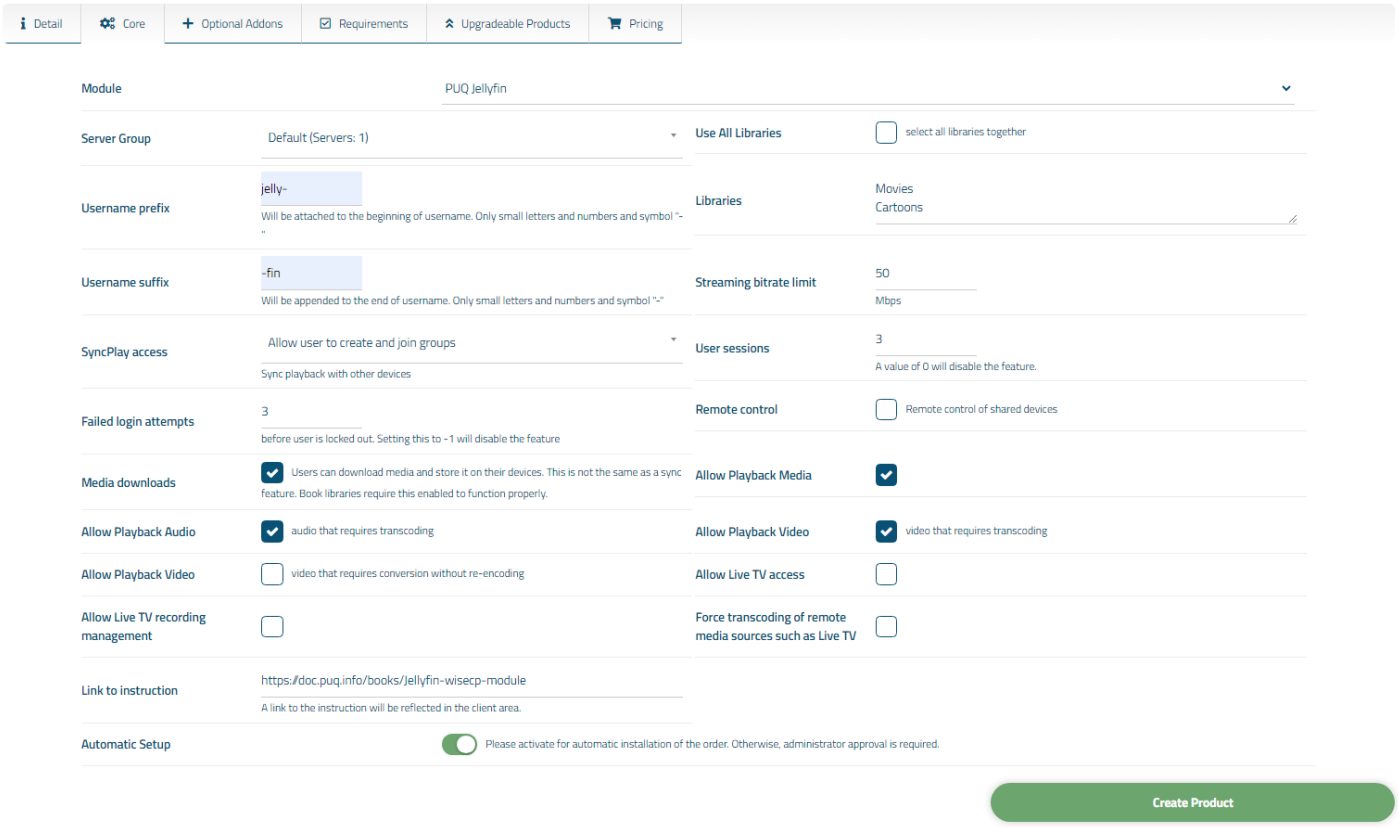

4. Fill in the configuration options according to your preferences.

Libraries:

- **Use All Libraries**: Choosing all of libraries from your Jellyfin server
- **Libraries**: The libraries you want to make available to customers of this product.
  (IMPORTANT! Start a new line for each new library)
  Example:
  "Movies
  Beginner`s Programming Course
  Comedy"
  IMPORTANT!

If you have a folder named "-", please enter it not as the first one or rename it.
If you don't want any folder to be accessible, type "-".

User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **SyncPlay access:** The SyncPlay feature enables to sync playback with other devices. Select the level of access this user has to the SyncPlay
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **User sessions:** Set the maximum number of simultaneous user sessions.
  A value of 0 will disable the feature.
- **Failed login attempts:** Determine how many incorrect login tries can be made before lockout occurs.
  A value of zero means inheriting the default of three tries for normal users and five for administrators. Setting this to -1 will disable the feature.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client_id>-<service_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area
-

Revision #4
Created 1 December 2023 06:39:25 by Yuliia Noha

Updated 4 December 2023 04:13:58 by Yuliia Noha