

# Add server (Mikrotik) in WISECP


## Mikrotik WireGuard Business-VPN module

**WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Mikrotik WireGuard Business- VPN

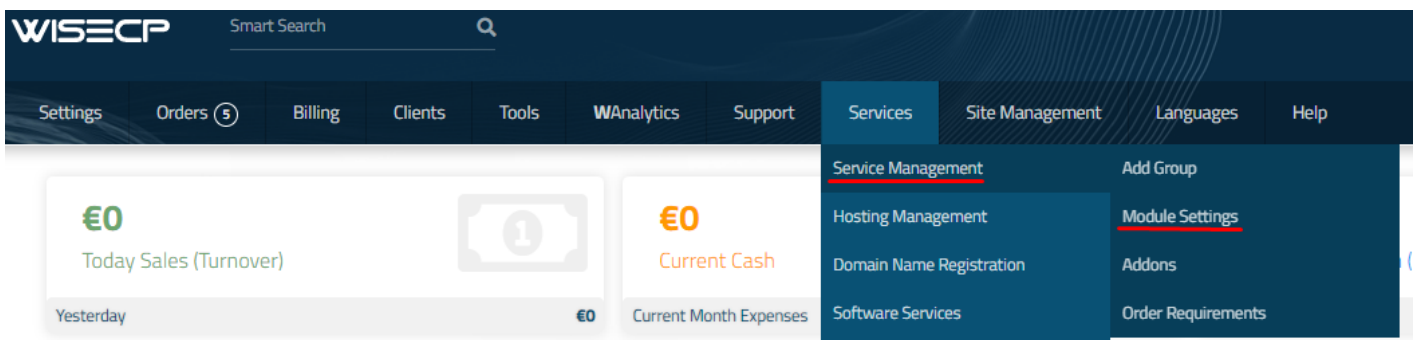

WISECP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Module Settings




SSL Certificate

Manage



Product License

Manage



Other

Manage

WISECP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Other

Initial Settings

All Modules

WISECP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Other

Dashboard / Module Settings / C

Initial Settings

All Modules

#### Search Within Modules

Write something...

PUQ Mikrotik WireGuard VPN

3. In the opened page, click the '**Add Server**' button.

WISSECP Smart Search Q

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Setting

Initial Settings All Modules

**PUQ**  
cloud

PUQ Mikrotik WireGuard Business-VPN

License key R1BC6H- -YYQRKX 2023-12-20T22:17:00+01:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

Servers [MikroTik](#)

10 Show Record Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
2	vpn-test.uuq.pl	active	Default	✓	vpn-test.uuq.pl	1/12	<a href="#">Edit</a> <a href="#">Delete</a>

Showing records from 1 to 1 - 1 Prev 1 Next

#### 4. On the opened page, enter all the necessary information:



- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **DNS 1 and DNS 2:** are DNS servers that will be specified in the configuration of WireGuard clients.
- **Assigned IP Addresses:** a list of Interface for public IP, Public IP, Private Net that will be assigned to WireGuard VPN clients, with each address on a new line. Format:

```
<interface>| <public_ip>/<mask>| <private_network>/<mask>
```

- **IP Address or Domain:** The address of the MikroTik router you are connecting to.
- **Username:** is the username for the account on MikroTik.
- **Password:** is the password for the account on MikroTik.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

[Go to Back](#)

### Add New Server

Name	vpn-test.uuq.pl
Maximum Number of Accounts	10
Server Group	Default 
Default	<input type="checkbox"/> Set as default server in group
DNS 1	77.87.125.10
DNS 2	77.87.125.20
Assigned IP Addresses <small>(One per line)</small>	<div>ether1-pub 77.87.125.206/25 192.168.101.0/24 ether1-pub 77.87.125.207/25 192.168.102.0/24 ether1-pub 77.87.125.208/25 192.168.103.0/24 ether1-pub 77.87.125.209/25 192.168.104.0/24 ether1-pub 77.87.125.210/25 192.168.105.0/24 ether1-pub 77.87.125.211/25 192.168.106.0/24 ether1-pub 77.87.125.212/25 192.168.107.0/24 ether1-pub 77.87.125.213/25 192.168.108.0/24</div> <div>&lt;interface&gt; &lt;public_ip&gt;/&lt;mask&gt; &lt;private_network&gt;/&lt;mask&gt;</div>
IP Address or Domain	vpn-test.uuq.pl
Username	wisecp-dev-MWG
Password	<div></div>
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	<div>443</div> <input type="checkbox"/> Change standard port
Test Connection	<div> Test Connection</div>

Add New Server

Revision #1

Created 25 November 2023 14:55:45 by Ruslan

Updated 25 November 2023 22:44:33 by Ruslan