

Add server (Mikrotik) in WISECP


Mikrotik WireGuard Business-VPN module

WISECP

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Mikrotik WireGuard Business- VPN

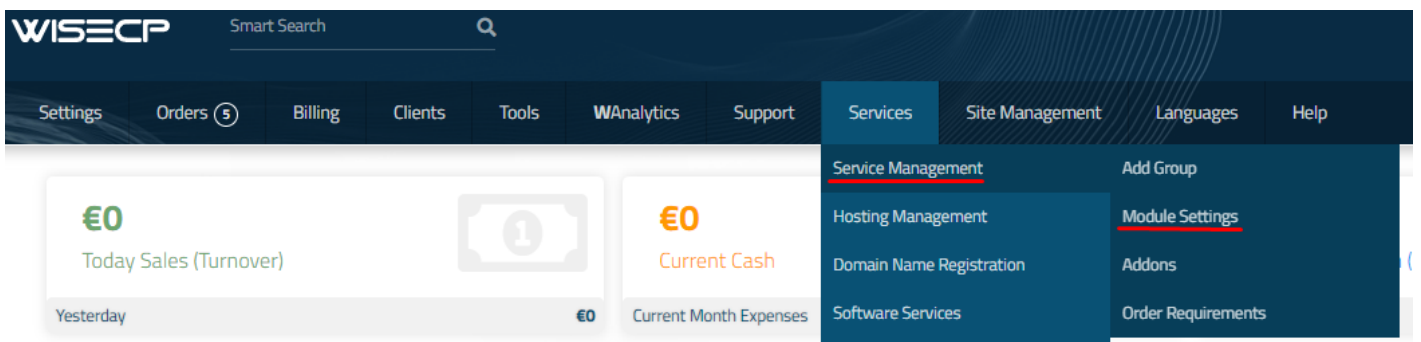

WISECP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Module Settings




SSL Certificate

Manage



Product License

Manage




Other

Manage


WISECP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other



Initial Settings




All Modules

WISECP Smart Search


Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other

Dashboard / Module Settings / C







Initial Settings





All Modules

Search Within Modules

Write something...



PUQ Mikrotik WireGuard VPN



3. In the opened page, click the '**Add Server**' button.

WISSECP Smart Search Q

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Setting

Initial Settings All Modules

PUQ
cloud

PUQ Mikrotik WireGuard Business-VPN

License key R1BC6H- -YYQRKX 2023-12-20T22:17:00+01:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

Servers [MikroTik](#)

10 [Show Record](#) Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
2	vpn-test.uuq.pl	active	Default	✓	vpn-test.uuq.pl	1/12	Edit Delete

Showing records from 1 to 1 - 1 Prev 1 Next

4. On the opened page, enter all the necessary information:



- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **DNS 1 and DNS 2:** are DNS servers that will be specified in the configuration of WireGuard clients.
- **Assigned IP Addresses:** a list of Interface for public IP, Public IP, Private Net that will be assigned to WireGuard VPN clients, with each address on a new line. Format:

```
<interface>| <public_ip>/<mask>| <private_network>/<mask>
```

- **IP Address or Domain:** The address of the MikroTik router you are connecting to.
- **Username:** is the username for the account on MikroTik.
- **Password:** is the password for the account on MikroTik.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

[Go to Back](#)

Add New Server

Name	vpn-test.uuq.pl
Maximum Number of Accounts	10
Server Group	Default 
Default	<input type="checkbox"/> Set as default server in group
DNS 1	77.87.125.10
DNS 2	77.87.125.20
Assigned IP Addresses <small>(One per line)</small>	<div>ether1-pub 77.87.125.206/25 192.168.101.0/24 ether1-pub 77.87.125.207/25 192.168.102.0/24 ether1-pub 77.87.125.208/25 192.168.103.0/24 ether1-pub 77.87.125.209/25 192.168.104.0/24 ether1-pub 77.87.125.210/25 192.168.105.0/24 ether1-pub 77.87.125.211/25 192.168.106.0/24 ether1-pub 77.87.125.212/25 192.168.107.0/24 ether1-pub 77.87.125.213/25 192.168.108.0/24</div> <div><interface> <public_ip>/<mask> <private_network>/<mask></div>
IP Address or Domain	vpn-test.uuq.pl
Username	wisecp-dev-MWG
Password	<div></div>
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	<div>443</div> <input type="checkbox"/> Change standard port
Test Connection	<div> Test Connection</div>

Add New Server

Revision #1

Created 25 November 2023 14:55:45 by Ruslan

Updated 25 November 2023 22:44:33 by Ruslan