

Description

Hetzner Datacenter module **WHMCS**

[Order now](#) | [Download](#) | [FAQ](#)

The module, fully installed and correctly implemented in the system, offers the following functionalities.

Module Functions:

- Auto create and deploy cloud servers
- Suspend/Unsuspend/Terminate/Change Package/Change Password
- IP management and bandwidth monitoring
- Backup and snapshot management
- SSH key management
- Custom email notifications
- Multilingual support (English, Russian, Ukrainian, etc.)
- Client area functionalities for server management

Available options in the admin panel:

- Create servers
- Suspend servers
- Terminate servers
- Unsuspend servers
- Change password
- Change Package

Available options in the client panel:

- Server management (start, stop, reboot)
 - Access to remote console
 - IP management
 - Backup and snapshot management
 - SSH key management
 - View server details and usage statistics
-

WHMCS minimal version: 8 +

Edit Product

Details Pricing Module Settings Custom Fields Configurable Options Upgrades Free Domain Cross-sells Other Links

Module Name
Server Group

License key
success: 2024-09-11T16:42:34+02:00

Parameters for package:

Server name
Server type
Server location
Server placement groups
Server image
SSH keys
Server networks
Server firewalls

```
#cloud-config
package_update: true
package_upgrade: true

write_files:
  - path: /root/hestia_install.sh
    content: |
      #!/bin/bash

      # Define variables
      HESTIA_INSTALL_SCRIPT="/root/hst-install.sh"
      LOG_FILE="/root/hst_install.log"
      HESTIA_PASSWORD="${Password}"
      HESTIA_HOSTNAME="${Hostname (Domain)}"
      HESTIA_EMAIL="${Clientemail}"

      # Download Hestia install script
      wget https://raw.githubusercontent.com/hestiacp/
hestiacp/release/install/hst-install.sh -O
$HESTIA_INSTALL_SCRIPT

Available variables:
${username} - Username from the service
${userpassword} - Password from the service
${hostname} - Domain name from the service
${nameserver1_server} - Nameserver 1 from the server options
${nameserver2_server} - Nameserver 2 from the server options
${nameserver1_service} - Nameserver 1 from the service options
${nameserver2_service} - Nameserver 2 from the service options
${clientemail} - Client email
Available variables from the service configurable options:
${(operating system)}
${(Backup)}
Available variables from the service custom fields:
${(Password)}
${(Hostname (Domain))}
Cloud-Init user data to use during Server creation. This field is limited to 32KiB.
```

Hide PTR open record
Not allow access to noVNC
Not allow access to Charts
Not allow reset password
Backup
Snapshot

Step 1: Choose server type and location

Select Server and Location

cx11 - x86 1 Cores 2 GB 20 GB	
hel1 - Net: 0.0052 EUR, Gross: 0.0052 EUR	
Attribute	Value
ID	1
Name	cx11
Description	CX11
Cores	1
Memory	2 GB
Disk	20 GB
CPU Type	shared
Storage Type	local
Architecture	x86
Included Traffic	20 TB
Location	hel1
Price Hourly (Net)	0.0052 EUR
Price Hourly (Gross)	0.0052 EUR
Price Monthly (Net)	3.29 EUR
Price Monthly (Gross)	3.29 EUR

Step 2: Choose deployment image and configure access, group name and SSH keys

Select Image

<input type="checkbox"/> Show Backups <input type="checkbox"/> Show Snapshots	
System	
debian-11 - Debian 11	
Attribute	Value
Id	45557056
Type	system
Status	available
Name	debian-11
Description	Debian 11
Disk Size	5
Created	16.08.2021, 11:12 UTC
Os Flavor	debian
Os Version	11
Rapid Deploy	true
Protection	Delete: false
Architecture	x86

Do not use (selected image will be used)

Custom option name for image. Select the name of the option that will define the image displayed to the user when the service is deployed.

☒ Allow user to select ISO image. If you enable this option, the user will be able to select the attached ISO image you have allowed.

☒ Allow user to reinstall service. If you enable this option, the user will be able to reinstall the service.

☒ Allow user to choose backup and snapshot when reinstalling service. If you enable this option, the user will be able to select backups and snapshots during the service reinstallation process. (Important! Each user only gets access to their backups and snapshots based on the user's services)

Select Placement Group

☒ private_web (spread)
☐ private_mail (spread)
☐ private_cloud (spread)

Select SSH Keys


☒ it@puq.pl

Step 3: Choose networks and firewalls

Important! It is necessary that at least one of the networks is enabled for successful server deployment. Choose from network options for your server. You can also create servers without a public network. If you want to disable a public network, you must first select a private network.

- ★ Overview ^
- i Information
- 📊 Charts
- ↺ Reinstall
- 📷 Snapshots
- 🔍 Backups
- ⊕ ISO mount
- 🔧 Actions ^
- 🔑 Reset password
- ☰ Upgrade/Downgrade Options
- 🛑 Request Cancellation

Dev License: This installation of WHMCS is running under a Development License and is not authorized to be used for production use. Please report any cases of abuse to abuse@whmcs.com




Hetzner product
Hetzner Datacenter


ACTIVE


🛑 Request Cancellation


Registration Date
Saturday, August 3rd, 2024
First Payment Amount
10.00 EUR
Recurring Amount
20.00 EUR
Billing Cycle
Monthly
Next Due Date
Tuesday, September 3rd, 2024
Payment Method
PayPal

- 🌐 Manage
- ⚙️ Configurable Options
- 📊 Metrics
- i Additional Information
- 📁 Resource Usage


Start



Stop


noVNC



Charts

i Status


running

 CPU:


1 cores

 RAM:


2 GB

 System Disk:


20 GB

 Datacenter:


Helsinki 1 virtual DC 2 (hel1-dc2)

 Image:


Debian 11 (debian-11)

 Outgoing Traffic:


0 bytes

 Ingoing Traffic:


0 bytes

 Public Network IPv4:


65.109.233.8


 Public Network IPv6:


2a01:4f9:c010:ac06::/64


 Public Network DNS PTR:


[static.8.233.109.65.clients.your-server.de](#)



User manual



Open PTR Record


Reinstall


Snapshots


Backups


Reset password


ISO mount

Powered by WHMCompleteSolution

- ★ Overview ^
- Information
- Charts
- Reinstall
- Snapshots
- Backups
- ISO mount
- Actions ^
- Reset password
- Upgrade/Downgrade Options
- Request Cancellation

Dev License: This installation of WHMCS is running under a Development License and is not authorized to be used for production use. Please report any cases of abuse to abuse@whmcs.com

You are in the area of reinstalling the virtual machine.
You must be aware of what you will do here.

Reinstalling the virtual machine, completely remove all data on all disks of the virtual machine.

First select your operating system type and then select your image. Please note that you can deploy backups of your other machines.

Select Image

☐ Show Backups ☐ Show Snapshots

System

debian-11 - Debian 11

Select an image

ubuntu-20.04 - Ubuntu 20.04

debian-11 - Debian 11

rocky-8 - Rocky Linux 8

centos-stream-9 - CentOS Stream 9

ubuntu-22.04 - Ubuntu 22.04

rocky-9 - Rocky Linux 9

alma-8 - AlmaLinux 8

alma-9 - AlmaLinux 9

debian-12 - Debian 12

fedora-39 - Fedora 39

fedora-40 - Fedora 40

ubuntu-24.04 - Ubuntu 24.04

OS Version	11
Rapid Deploy	true
Protection	Delete: false
Architecture	x86

To protect against accidental reinstallation.
Please enter the word: **reinstall** In capital letters.

REINSTALL

Reinstall

- ★ Overview ^
- i Information
- 📊 Charts
- 🔄 Reinstall
- 📷 Snapshots
- 📁 Backups
- 📀 ISO mount
- 🔧 Actions ^
- 🔑 Reset password
- ⚙️ Upgrade/Downgrade Options
- 🕒 Request Cancellation

Dev License: This installation of WHMCS is running under a Development License and is not authorized to be used for production use. Please report any cases of abuse to abuse@whmcs.com

Snapshots: 3

↻ Refresh

Snapshots are immediate, complete copies of your server's disks. For optimal data consistency, we advise shutting down your server before capturing a snapshot. The cost for snapshots is calculated based on the amount of storage used per month.

Snapshot description

📷 Take Snapshot

📷	My Snapshot (2024-08-23T07:57:50+00:00) Size: 0.99 GB	↻ Rollback	🗑️ Remove
📷	My Snapshot Next (2024-08-23T08:02:31+00:00) Size: 0.99 GB	↻ Rollback	🗑️ Remove
📷	My previous version (2024-08-23T08:06:26+00:00) Size: 0.99 GB	↻ Rollback	🗑️ Remove

Powered by [WHMCompleteSolution](#)

- ★ Overview ^
- i Information
- 📊 Charts
- 🔄 Reinstall
- 📷 Snapshots
- 📁 Backups
- 📀 ISO mount
- 🔧 Actions ^
- 🔑 Reset password
- ⚙️ Upgrade/Downgrade Options
- 🕒 Request Cancellation

Dev License: This installation of WHMCS is running under a Development License and is not authorized to be used for production use. Please report any cases of abuse to abuse@whmcs.com

Mounted



Windows Server 2019 English

🗑️ Umount

+ 3CX v20 Debian12 (amd64) (x86)	📀 Mount
+ Windows Server 2016 English (x86)	📀 Mount
+ Securepoint UTM v12.5.4.1 Installer x86_64 (x86)	📀 Mount
+ Windows Server 2016 Russian (x86)	📀 Mount
+ Windows Server 2016 Language Pack (x86)	📀 Mount
+ OPNsense 24.7 (amd64) (x86)	📀 Mount
+ SystemRescueCD (2018-04-02) (x86)	📀 Mount
+ virtio-win-0.1.240.iso (x86)	📀 Mount

- ★ Overview ^
- i Information
- 📊 Charts
- 🔄 Reinstall
- 📷 Snapshots
- 🔗 Backups
- ⊕ ISO mount
- 🔧 Actions ^
- 🔑 Reset password
- ☰ Upgrade/Downgrade Options
- 🛑 Request Cancellation

Dev License: This installation of WHMCS is running under a Development License and is not authorized to be used for production use. Please report any cases of abuse to abuse@whmcs.com

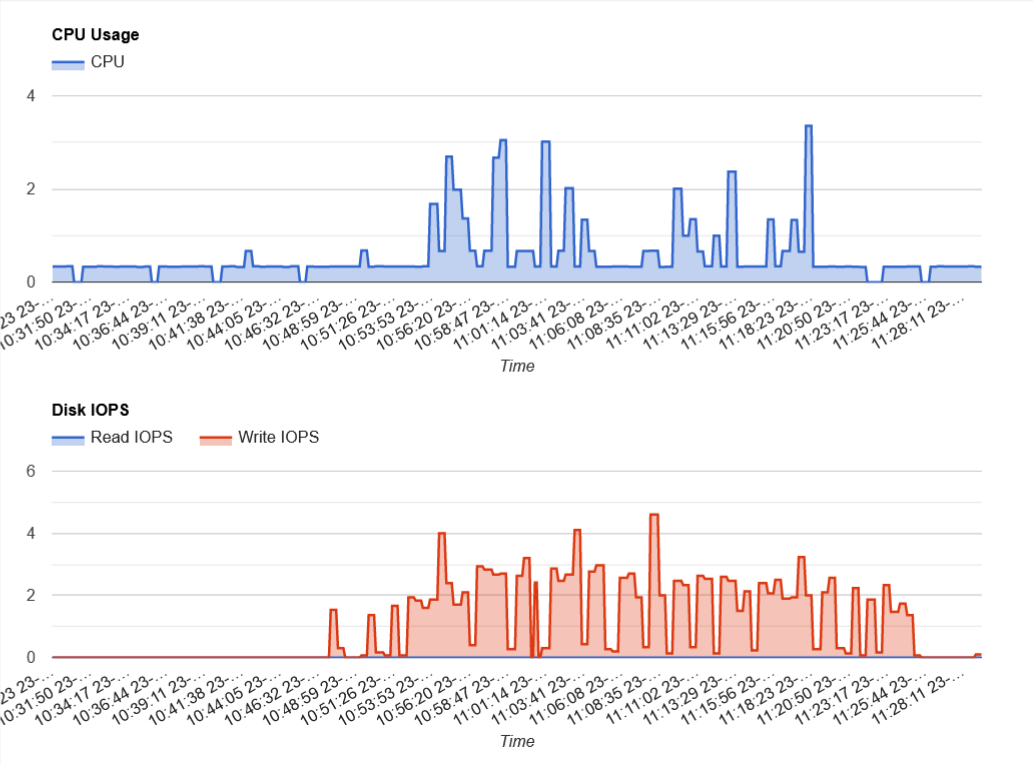
Last hour

Last day

Last week

Last month

Last year



Revision #6
Created 16 August 2024 09:25:47 by Dmytro Kravchenko
Updated 4 September 2024 11:07:16 by Yuliia Noha