How to Deactivate a Module

PUQcloud Panel

Order Now | Download | FAQ

Overview

Deactivation temporarily turns off a module while keeping its core data and configuration intact. It’s useful if you want to pause a module without uninstalling it.

Steps to Deactivate a Module

1. Go to **Dashboard → Modules**.
2. Locate the active module (marked as **ACTIVE**).
3. Click the **red cross ( )** button to deactivate it.
4. The system executes the `Deactivate` function, which:
   - Stops the module’s background tasks and integrations.
   - Removes temporary tables and runtime data.
   - Keeps the configuration in place for future reactivation.


Note

Deactivation does **not** delete the module from the system — it simply disables its functionality until reactivated.

Result

The module becomes **INACTIVE** but can be reactivated anytime with the green arrow button.

Example

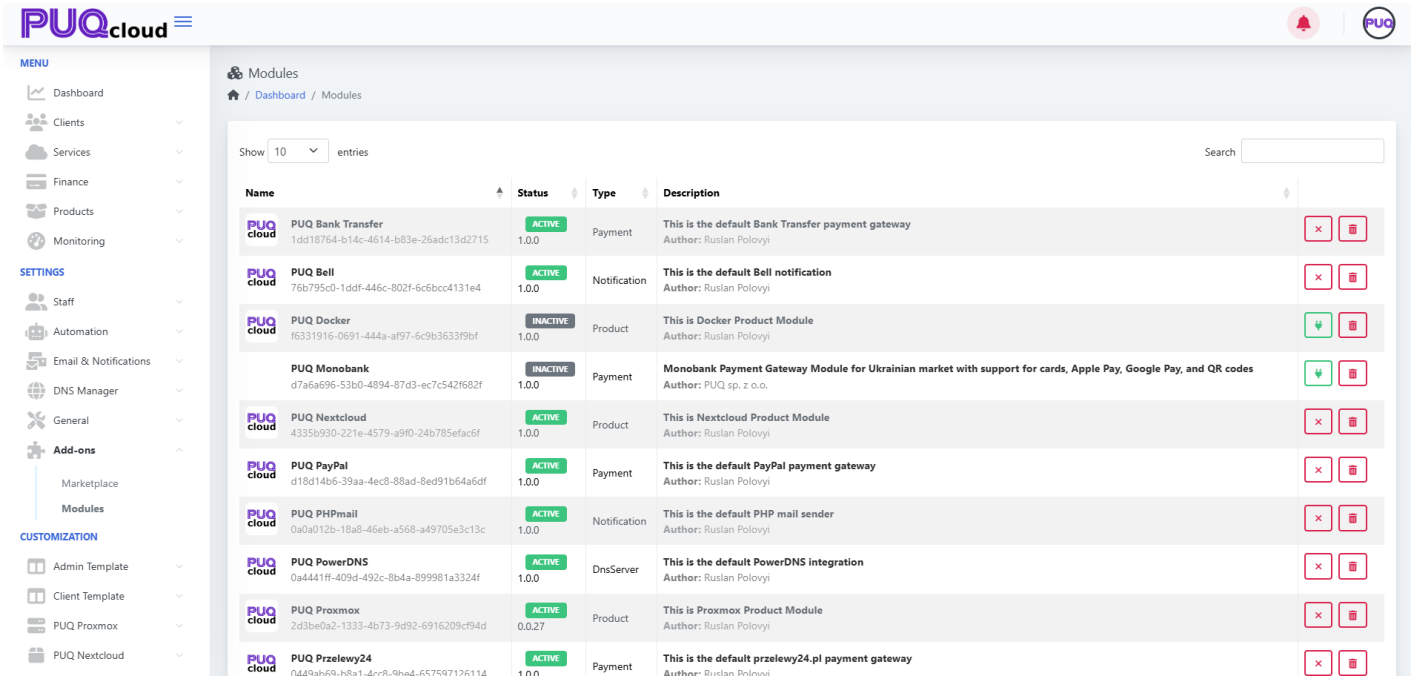

Revision #5
Created 24 October 2025 06:04:24 by Yuliia Noha
Updated 24 October 2025 06:47:26 by Yuliia Noha