Add server (Mikrotik) in WISECP

Mikrotik WireGuard VPN module


WISECP


Order now | Download | FAQ


1. Log in to the administrative area of your **WISECP**.


2. Go to module configuration.

```
Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Mikrotik WireGuard VPN
```

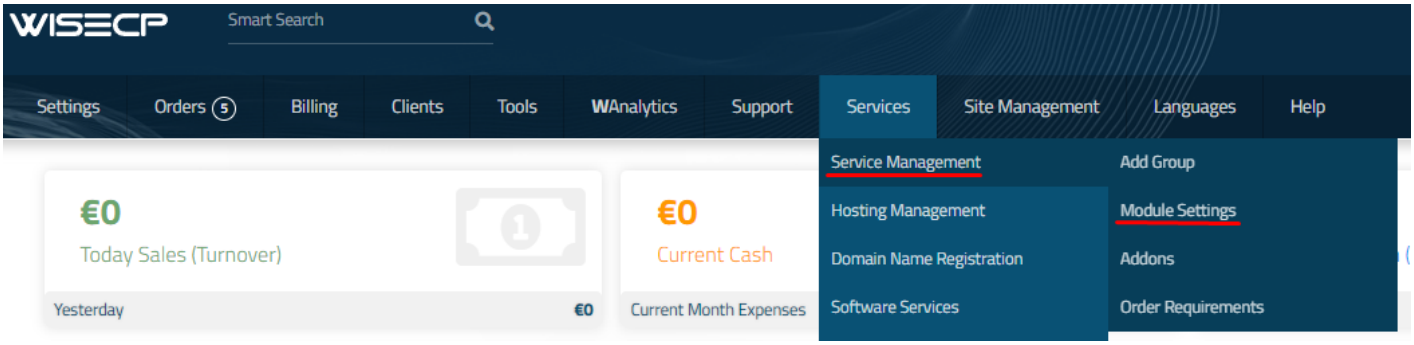


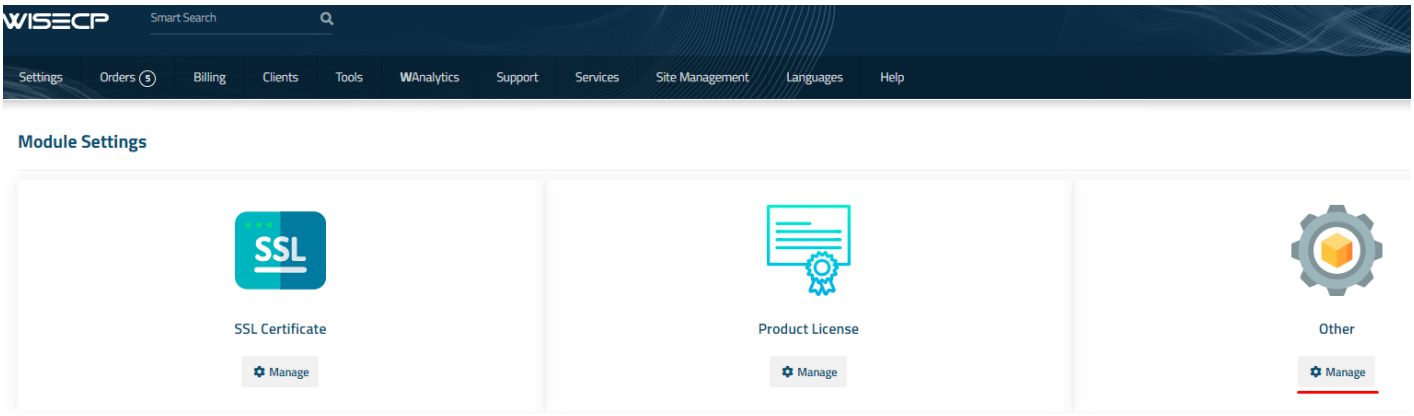

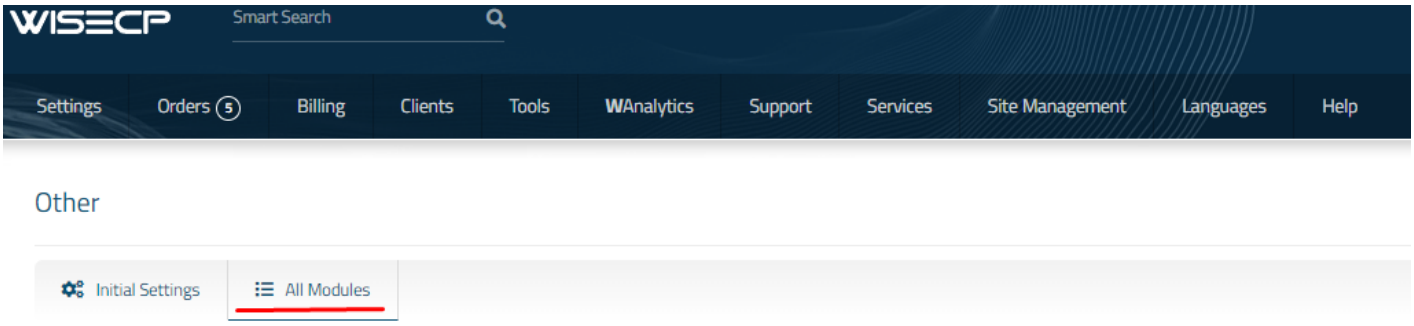

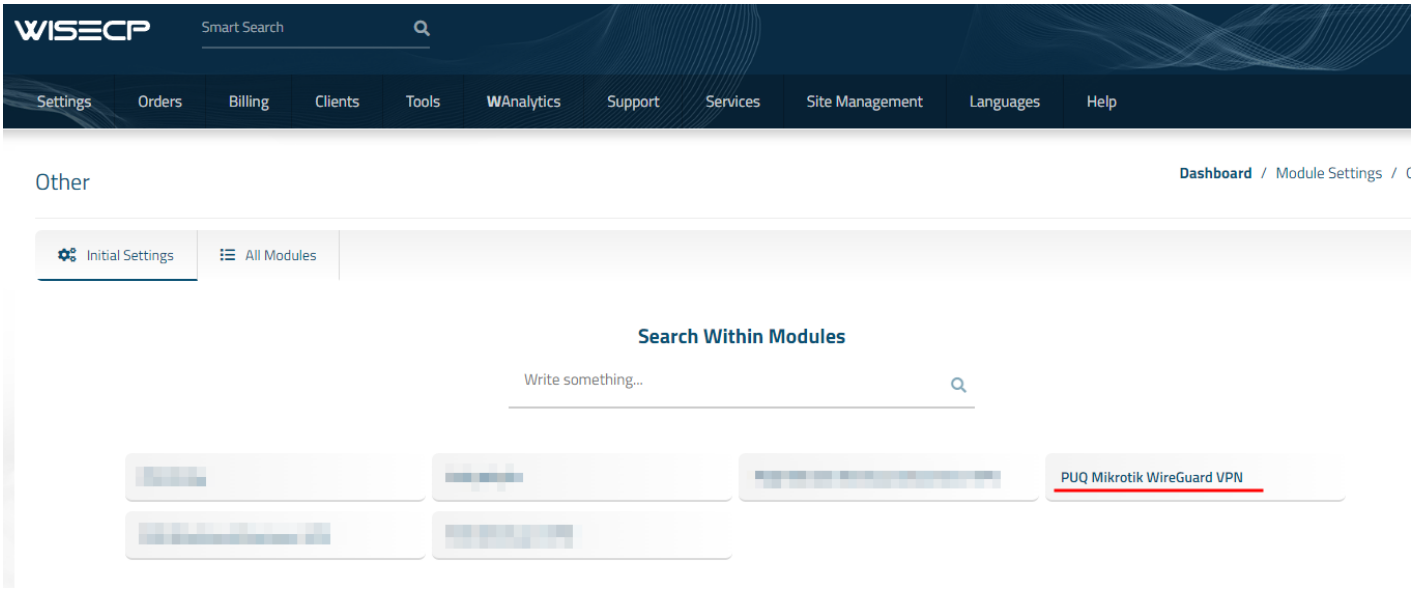

3. In the opened page, click the '**Add Server**' button.

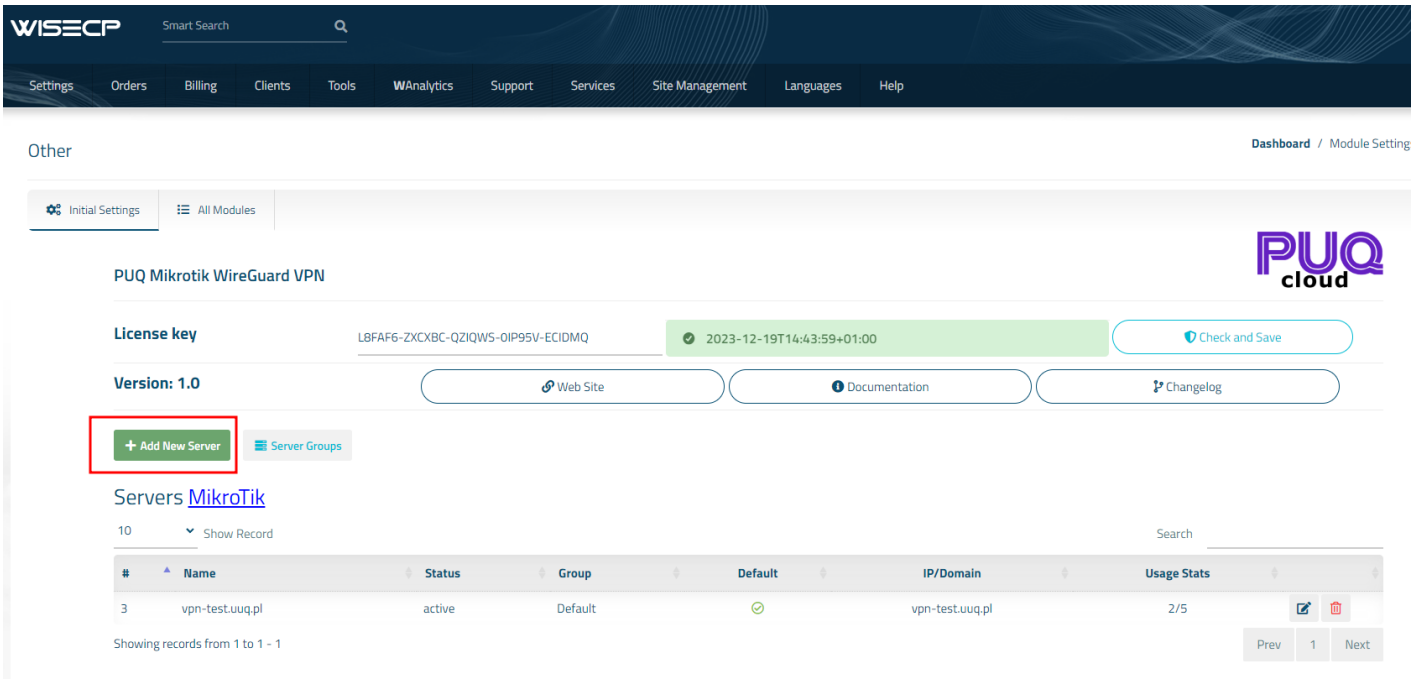

4. On the opened page, enter all the necessary information:

- **Name**: Displayed name of the server.
- **Maximum Number of Accounts**: The number of services that can be on this server.
- **Server Group**: Optionally, choose the server group.
- **DNS 1 and DNS 2**: are DNS servers that will be specified in the configuration of WireGuard clients.
- **Assigned IP Addresses**: a list of IP addresses that will be assigned to WireGuard VPN clients, with each address on a new line.
- **IP Address or Domain**: The address of the MikroTik router you are connecting to.
- **Username:** is the username for the account on MikroTik.
- **Password:** is the password for the account on MikroTik.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

PUQ Mikrotik WireGuard VPN

PUQ cloud

Go to Back

Add New Server

Name	vpn-test.uuq.pl
Maximum Number of Accounts	122
Server Group	Default
Default	Set as default server in group
DNS 1	77.87.125.10
DNS 2	77.87.125.20
Assigned IP Addresses (One per line)	192.168.88.2 192.168.88.3 192.168.88.10 192.168.88.20 192.168.88.30
IP Address or Domain	vpn-test.uuq.pl
Username	wisecp-dev-MWG
Password	
SSL	Connect using SSL
Port	443 Change standard port
Test Connection	Test Connection

Add New Server

Turn Back

Revision #2
Created 25 November 2023 04:37:37 by Ruslan
Updated 25 November 2023 04:48:18 by Ruslan