

# Add server (Mikrotik) in WISECP


## Mikrotik WireGuard VPN module

# WISECP

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Mikrotik WireGuard VPN

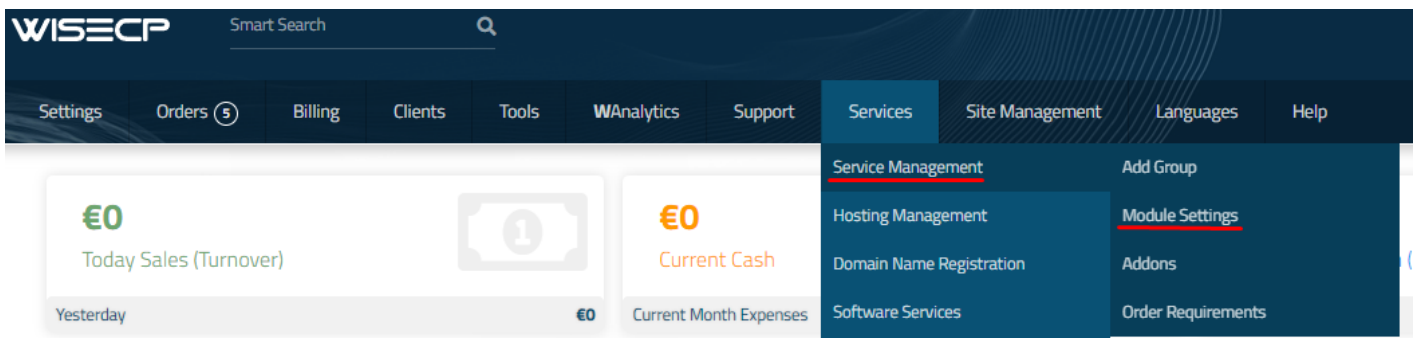

WISECP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Module Settings




SSL Certificate

Manage



Product License

Manage



Other

Manage

WISECP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

### Other

Initial Settings All Modules

### Search Within Modules

Write something...

PUQ Mikrotik WireGuard VPN

3. In the opened page, click the '**Add Server**' button.

WISSECP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Setting

Initial Settings All Modules

PUQ Mikrotik WireGuard VPN

License key L8FAF6-ZXCXBC-QZIQWS-OIP95V-ECIDMQ 2023-12-19T14:43:59+01:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

Servers [MikroTik](#)

10 [Show Record](#) Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
3	vpn-test.uuq.pl	active	Default	✓	vpn-test.uuq.pl	2/5	<a href="#">Edit</a> <a href="#">Delete</a>

Showing records from 1 to 1 - 1 [Prev](#) [1](#) [Next](#)

#### 4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **DNS 1 and DNS 2:** are DNS servers that will be specified in the configuration of WireGuard clients.
- **Assigned IP Addresses:** a list of IP addresses that will be assigned to WireGuard VPN clients, with each address on a new line.
- **IP Address or Domain:** The address of the [MikroTik](#) router you are connecting to.
- **Username:** is the username for the account on [MikroTik](#).
- **Password:** is the password for the account on [MikroTik](#).
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.



PUQ Mikrotik WireGuard VPN

< Go to Back

Add New Server

Name	vpn-test.uuq.pl
Maximum Number of Accounts	122
Server Group	Default
Default	<input type="checkbox"/> Set as default server in group
DNS 1	77.87.125.10
DNS 2	77.87.125.20
Assigned IP Addresses (One per line)	192.168.88.2 192.168.88.3 192.168.88.10 192.168.88.20 192.168.88.30
IP Address or Domain	vpn-test.uuq.pl
Username	wisecp-dev-MWG
Password	
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	<input type="button" value="Test Connection"/>

Add New Server

<< Turn Back

---

Revision #2

Created 25 November 2023 11:37:37 by Ruslan

Updated 25 November 2023 11:48:18 by Ruslan