PUQ Mautic
Image not found or type unknown

Installation and configuration guide

- Setup (install/update)
- License Activation
- Add server (ownCloud) in WISECP
- Service/Product configuration

Setup (install/update)

ownCloud module **WISECP**

Order now | Download | FAQ

> To install and update a module, you must perform one and the same action.

1. Download the latest version of the module.

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-ownCloud/PUQ_WISECP-ownCloud-latest.zip
```

> All versions are available: https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-ownCloud/

2. Unzip the archive with the module.

```
unzip PUQ_WISECP-ownCloud-latest.zip
```

3. Copy and Replace "puqownCloud" from "PUQ_WISECP-ownCloud" to "WISECP_WEB_DIR/coremio/modules/Product/"

License Activation


ownCloud module **WISECP**


Order now | Download | FAQ


1. Log in to the administrative area of your **WISECP**.

2. Go to module configuration.


```
Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ ownCloud
```

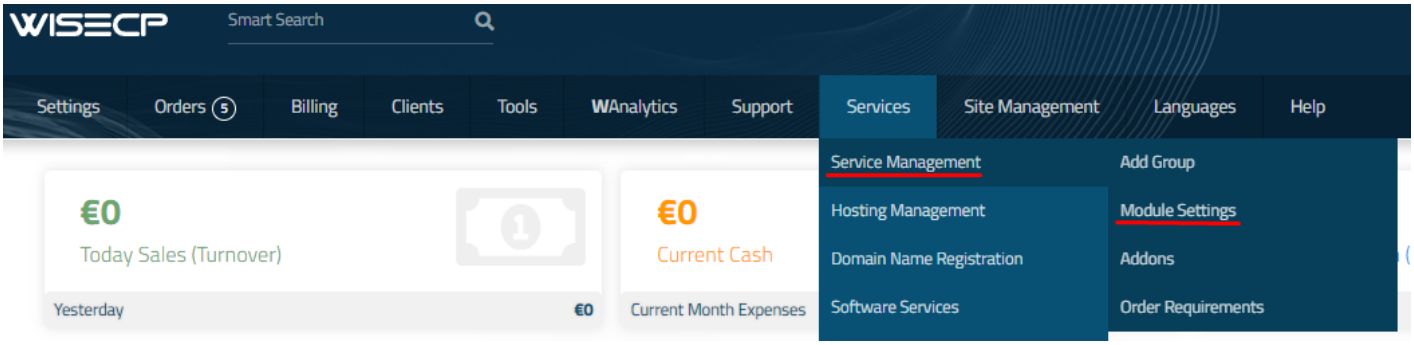

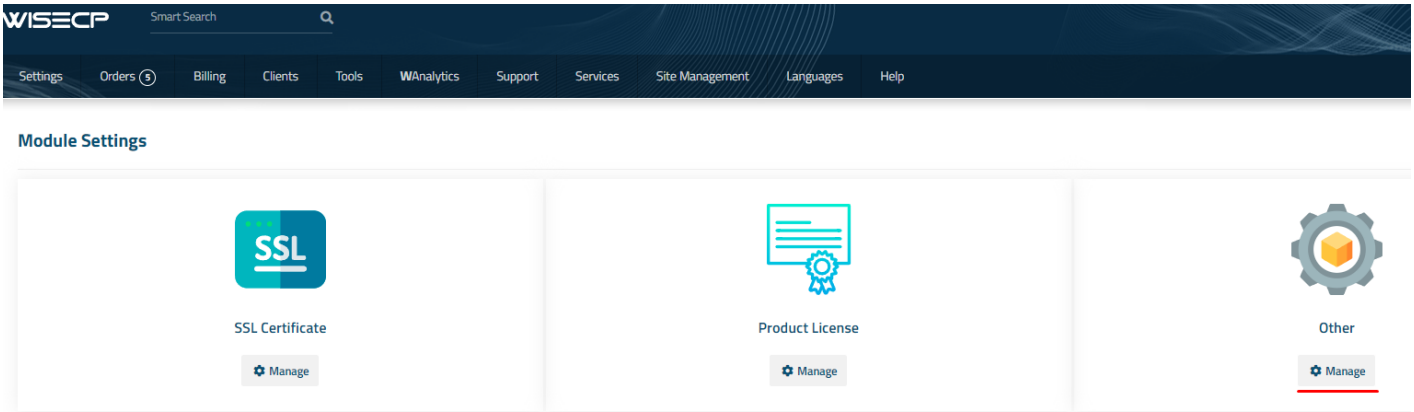

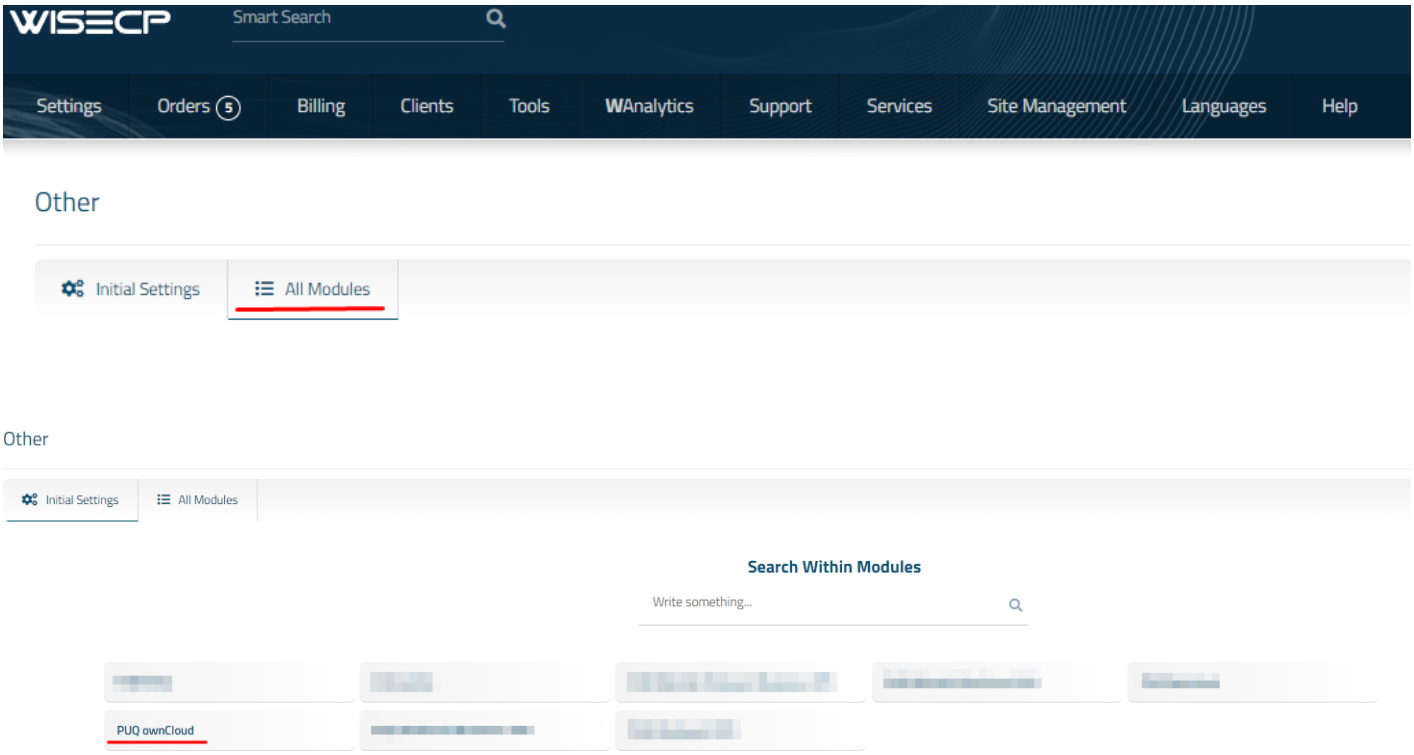

3. On the open page, enter the purchased license key for this product and click the '**Check and Save**' button to validate the key and save it.

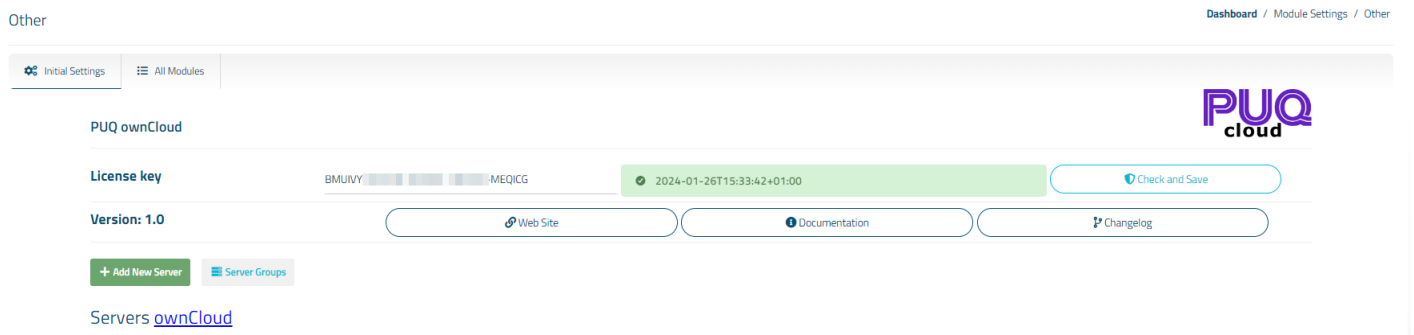

Add server (ownCloud) in WISECP


ownCloud module **WISECP**


Order now | Download | FAQ


1. Log in to the administrative area of your **WISECP**.

2. Go to module configuration.


```
Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ ownCloud
```

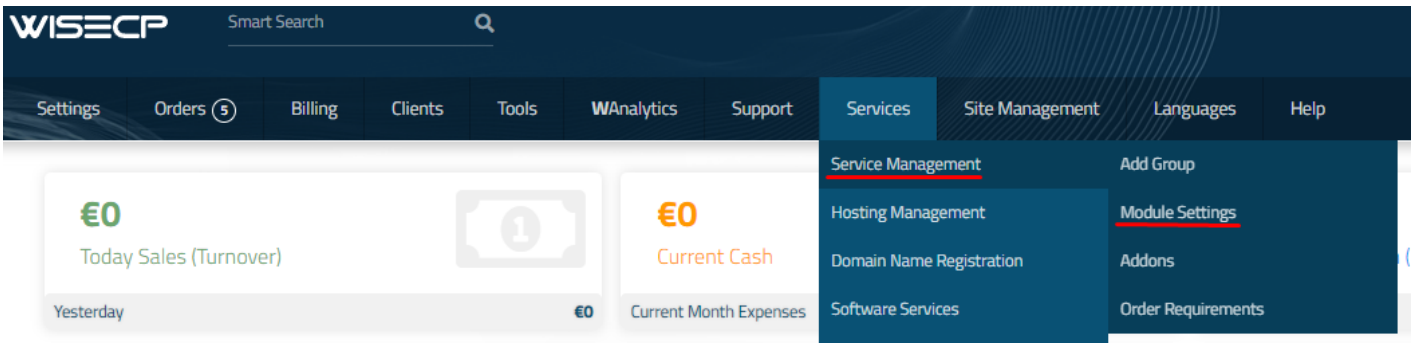

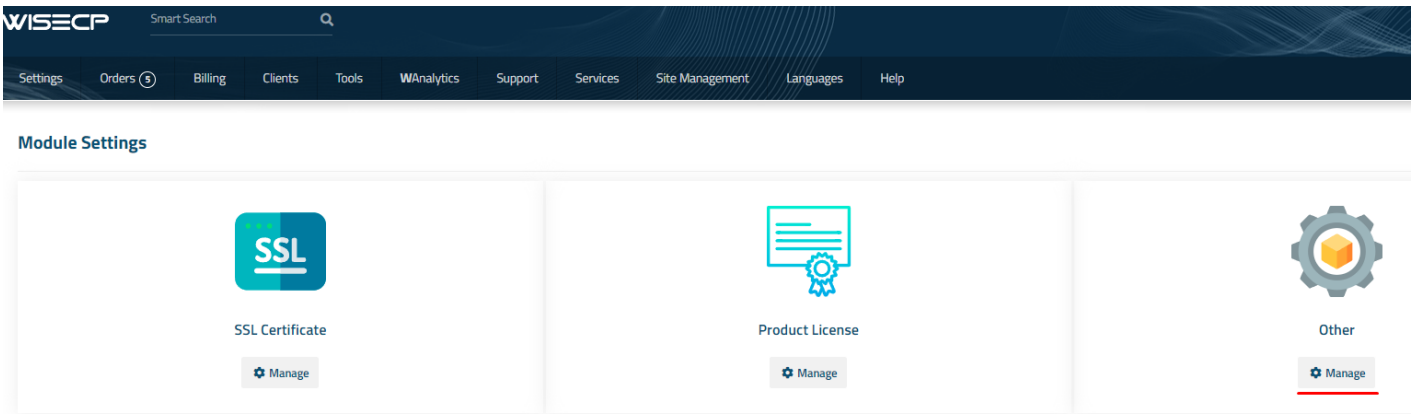

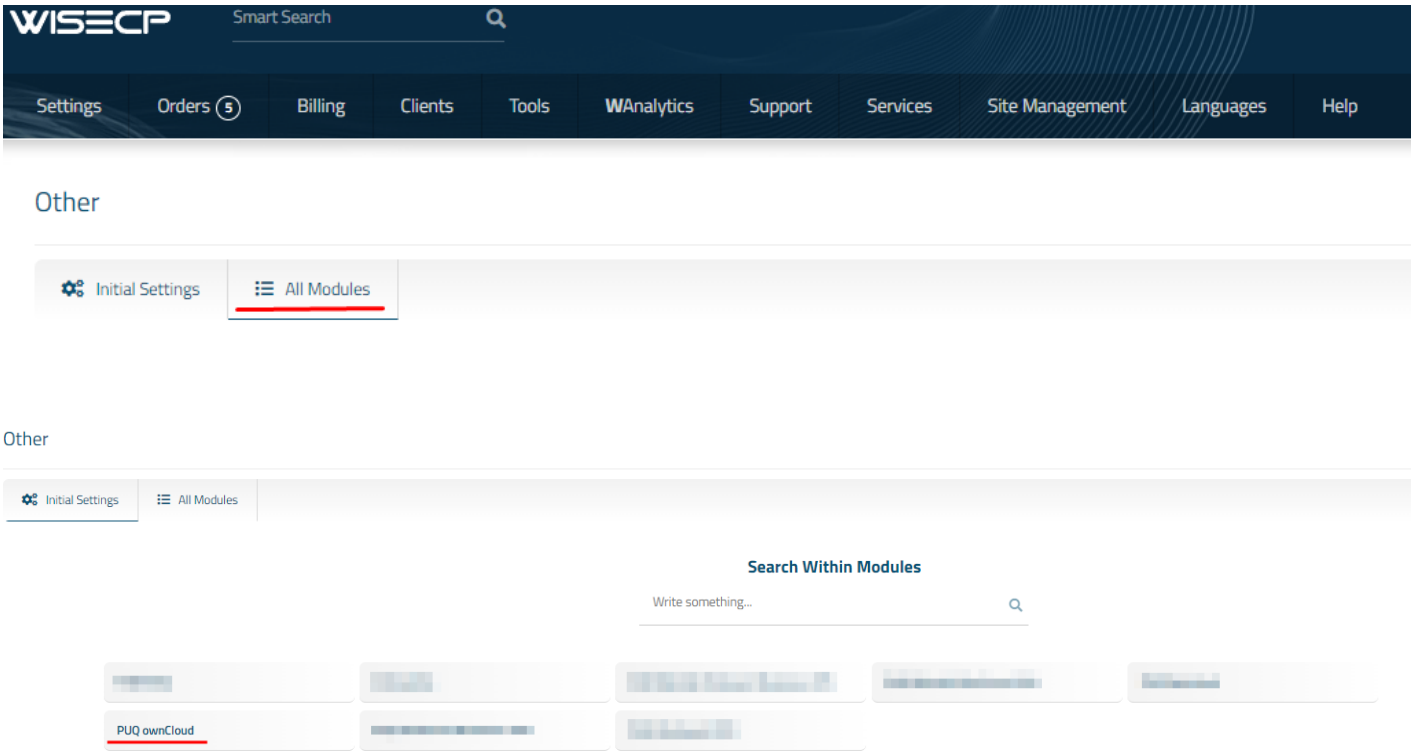


3. In the opened page, click the '**Add Server**' button.

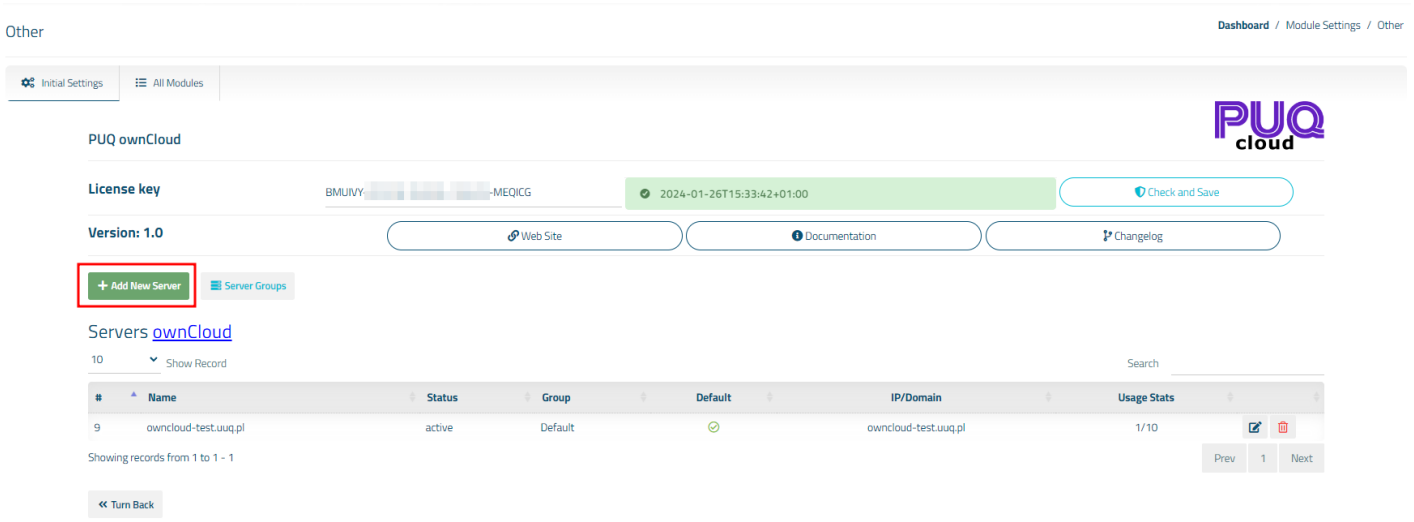

4. On the opened page, enter all the necessary information:

- **Name**: Displayed name of the server.
- **Maximum Number of Accounts**: The number of services that can be on this server.
- **Server Group**: Optionally, choose the server group.

- **IP Address or Domain**: The address of the ownCloud server you are connecting to.
- **Username/Password**: Username and Password on the ownCloud server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

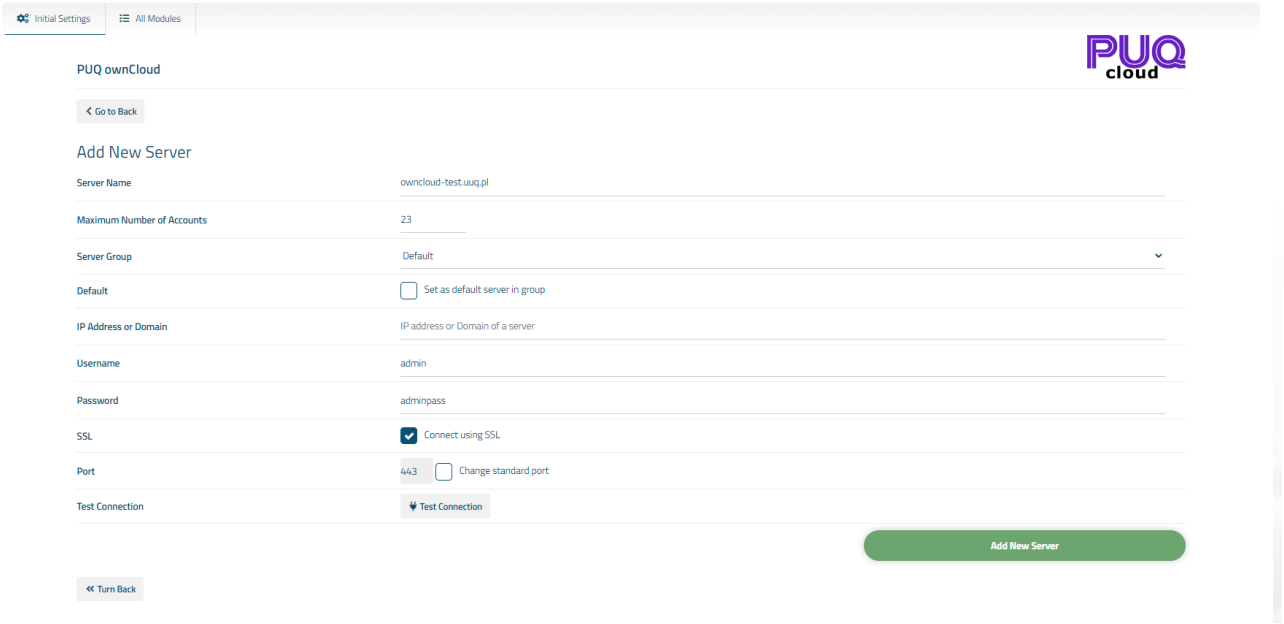

Service/Product configuration

ownCloud module **WISECP**

Order now | Download | FAQ


> If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.


2. Create New Service Group

Go to

```
Services -> Service Management -> Add Group
```

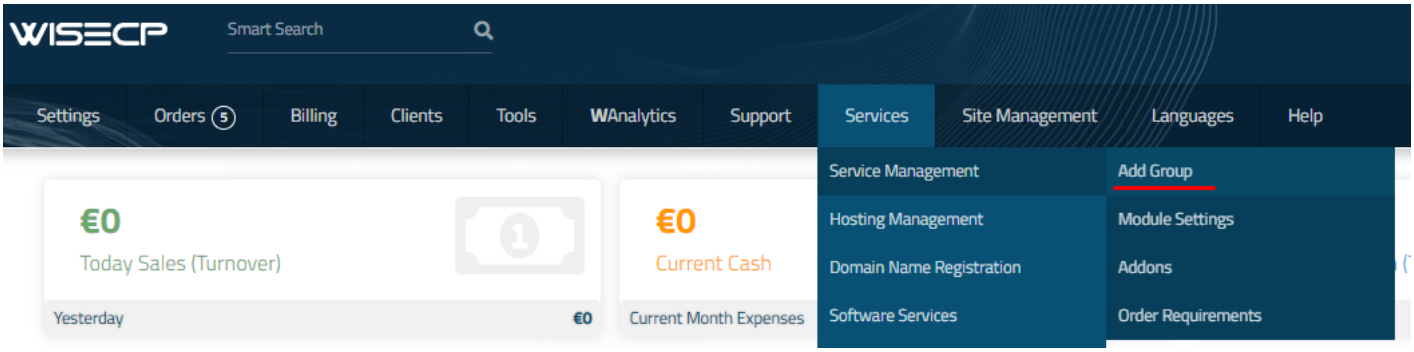


Enter all the necessary data and click the '**Create Group**' button.

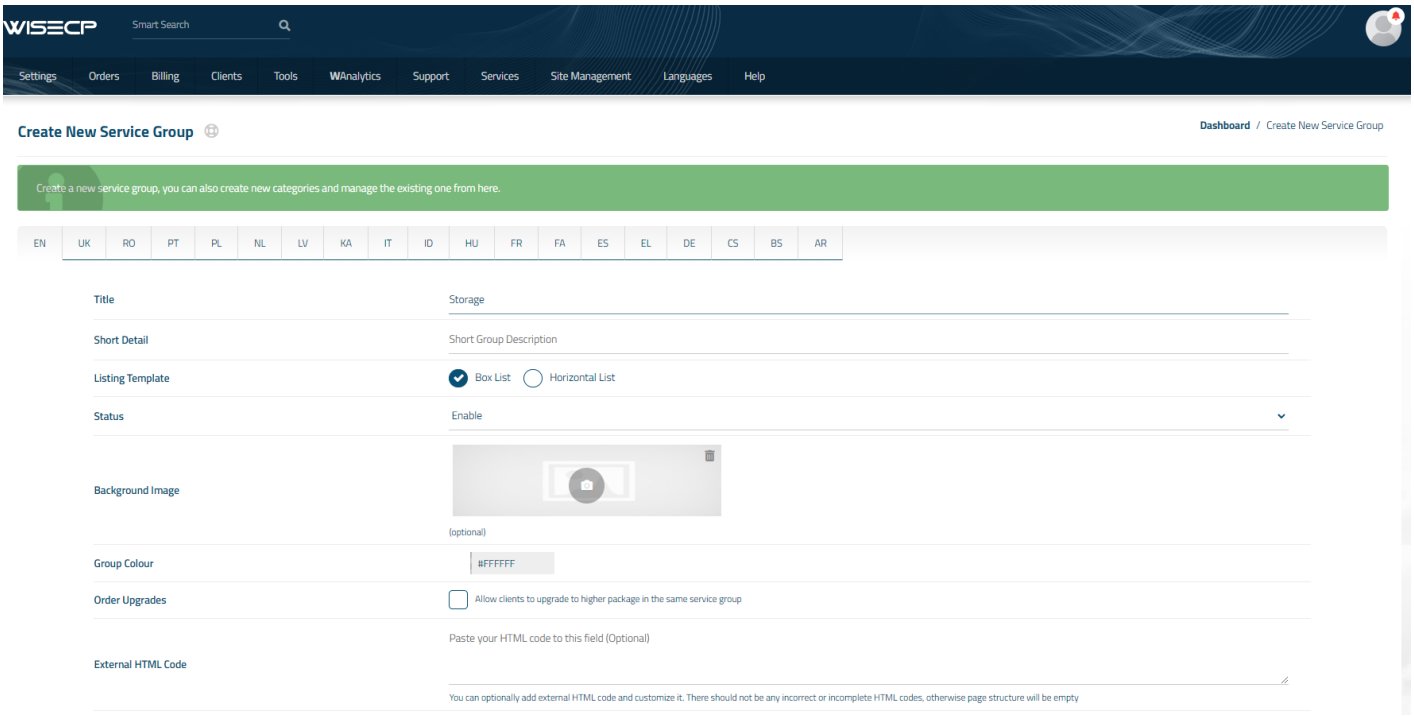


3. Adding a New Service

Go to

```
Services -> our service group where you need to add the new service.
```

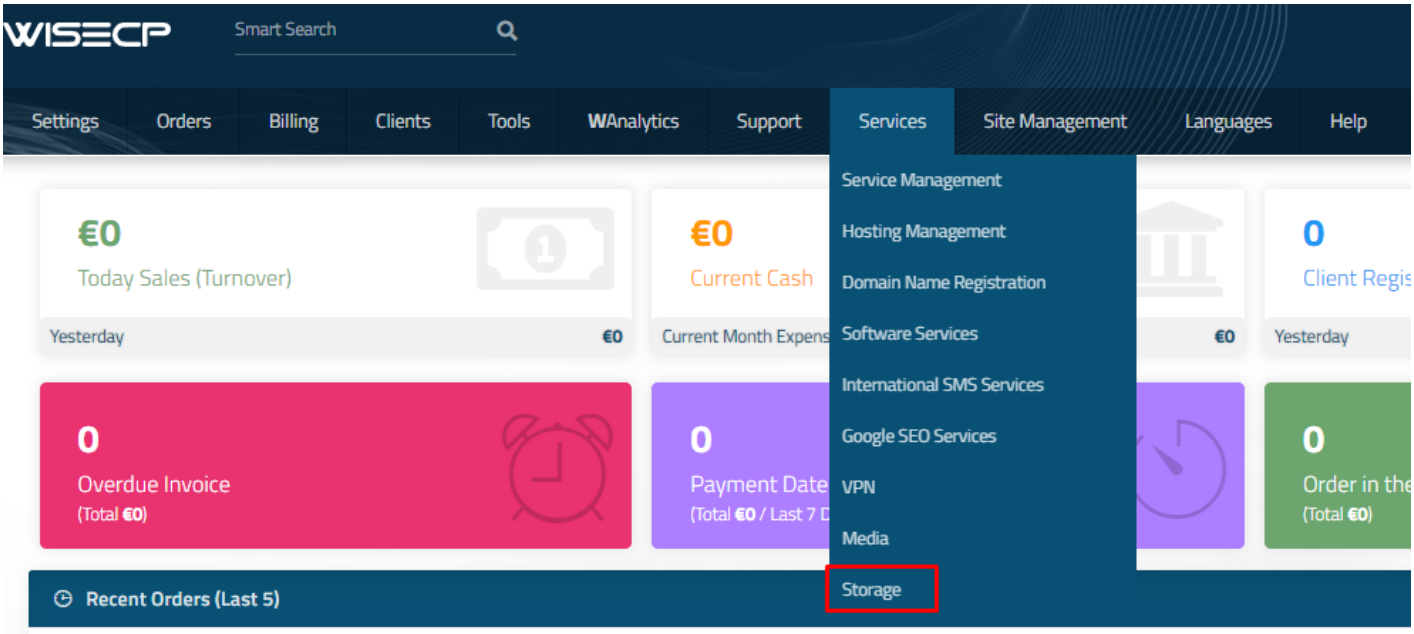


In the opened window, click the '**Create New Service**' button.

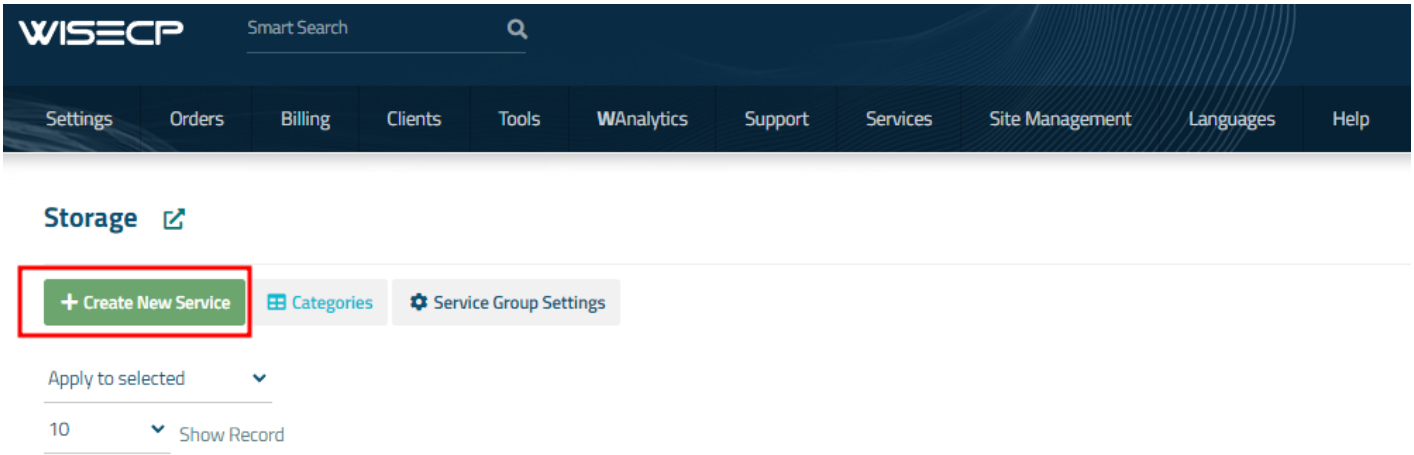

On the opened page, enter all the necessary details for your new service and navigate to the '**Core** ' tab.

Select the '**PUQ ownCloud**' module from the drop-down list of modules.

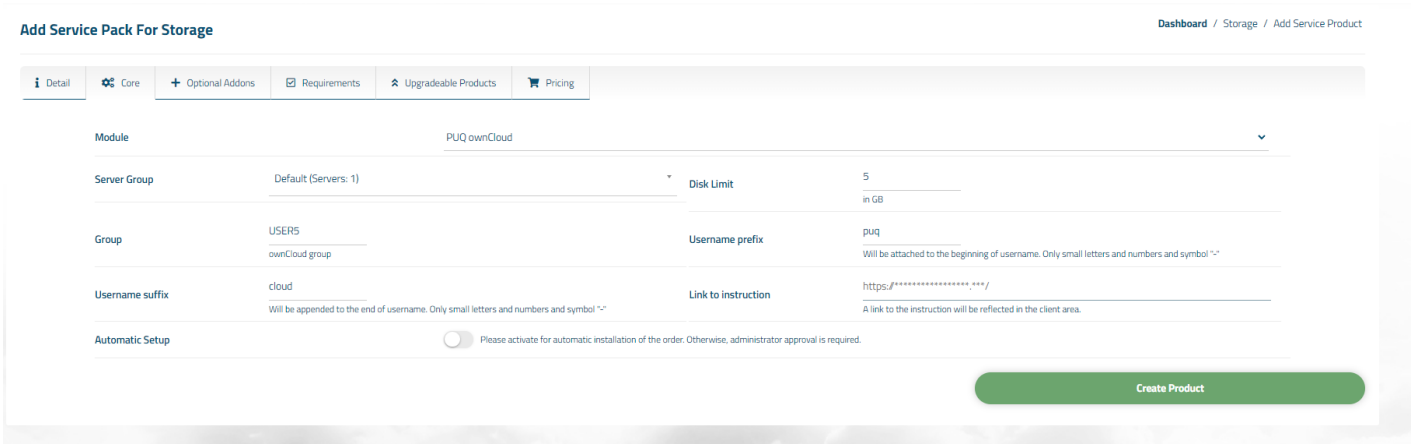

4. Fill in the configuration options according to your preferences.

- **Server Group** is the group of servers from which a server will be chosen for provisioning the service
- **Disk Limit:** is the disk space quota that is issued to the user
- **Group:** is the group that will be assigned to the user
- **Username Prefix** will be added at the beginning of the username during user creation and is used for uniqueness
- **Username Suffix** will be added at the end of the username during user creation and is also used for uniqueness
- **Link to Instruction** Provide the link to the instruction for the service, and it will be displayed in the client area as a separate button
- **Link to VPN Clients** Provide the link to the page for downloading VPN clients for the

service, and it will be displayed in the client area as a separate button

- **Automatic Setup** Please activate for automatic installation of the order. Otherwise, administrator approval is required.