

# Jellyfin WISECP module

This module enables your company to offer public media services to customers through Jellyfin accounts. It facilitates the creation of customer accounts on a pre-configured Jellyfin server, allowing for the sale of various media packages at different prices. The module requires a pre-installed Jellyfin server and uses the Jellyfin API for client account management. It also supports multiple languages. Administrators can suspend, terminate, or unsuspend users, change user passwords, and more, while clients can manage their devices and libraries.

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
  - [Setup \(install/update\)](#)
  - [License Activation](#)
  - [Setup guide: Jellyfin setup](#)
  - [Add server \(Jellyfin server\)](#)
  - [Service configuration](#)
  - [Add new library/item in Jellyfin](#)
  - [Getting Access Hash \(API key\)](#)
- [Client Area](#)
  - [Product Home Screen](#)
- [Admin Area](#)
  - [Order Detail](#)

# Description

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Thanks to the module, the company is able to offer public media services to its customers based on Jellyfin accounts.

The module is used to create customer accounts on the previously prepared Jellyfin server. The module enables You to define multiple public media packages and sell them at different prices. The module creates a customer account according to the selected package. The client can have many independent accounts in the media.

For the correct operation of the module, a pre-prepared Jellyfin installation is required (the module does not assist in the installation of the Jellyfin server and assumes that such installation is ready for operation through API.) Module use Jellyfin API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Jellyfin server, including all installation steps such as PHP, Jellyfin, SSL certificates etc.

### **Requirements:**

WISECP: v3.1.5+, php: v8.x, IONCUBE: V12+

Jellyfin: v10+

## Functions:

- Auto create and deploy client account
- The module uses only the API to manage the accounts
- Module supports multilingualism (**Arabic, Bosnian, Czech, German, Greek, English, Spanish, Persian, French, Hungarian, Indonesian, Italian, Georgian, Latvian, Dutch, Polish, Portuguese, Romanian, Ukrainian**)
- The module shows all user info: enabled user libraries, active devices etc.

- [Link to instructions for setting up the service in the client area.](#)

## Available options in the admin panel:

- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- Drop all devices
- Unblock user
- API connection status
- List of active devices
- List of enabled user libraries

## Available options in the client panel:

- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password

Screenshot of the Client area



Details	Additional Services	Upgrade	Cancellation Request	Order ID #193
---------	---------------------	---------	----------------------	------------------



Renew Now

General Information		Invoice #305
Service Group	Media	
Service Name	Jellyfin	
Services Status	<div>Active</div>	
Payment Period	Monthly	
Renewed On	08.07.2024	
Next Due Date	08.08.2024	
Amount : 11zł		



User manual



Web interface



Drop All Devices



Unblock User

Management Media account

Username	jelly-4-193-fin	
Status	Enable	
Password	.....	
Save		

Libraries

Beginner's Programming Course

Clips

Movies

Playlists

Failed Login Attempt	1/3
Active Sessions	0/3
Active Devices	10  Show Record

Search

Device Name	App Name	Last Activity
No data available in table		

No Records

Prev

Next

# Screenshot of the Admin area

Jellyfin Order Detail

Dashboard / Orders / Jellyfin Order Detail

Detail

Core

Blocks

Order Addons

Requirements

Upgrade / Downgrade

History

Cancellation / Refund

API Module

PUQ Jellyfin

Drop All Devices

Unblock User

API answer OK

Username: jelly-4-194-fin Is Disabled : NO

Beginner's Programming Course

Streaming bitrate limit	Active Sessions	Failed Login Attempt	Sync Play Access
60 Mbps	1/3	2/3	Allow user to join groups

10

Show Record

Search

Device Name	App Name	Last Activity
Edge Chromium	Jellyfin Web	2024-07-08T12:36:43.9502049Z

Showing records from 1 to 1 - 1

Prev

1

Next

Usernamejelly-4-194-finPasswordXEAKTINJServerJellyfin

Overwrite package settings

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

To apply the changes on the server, it is necessary to check this checkbox.

Update

# Changelog

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### v1.2 Released 12-07-2024

- Client area more adapted for mobile version
  - Buttons for copying login and password have been added to the client area
  - Optimized.
- 

### v1.1 Released 15-02-2024

- Introduced a "Show" button for displaying service passwords in the Client Area.
  - Fixed a bug with some cases where it was not possible to delete the server
  - Fixed a bug with the test connection to the server.
  - Improved security
- 

### v1.0 Released 07-12-2023

First version

# Installation and configuration guide



# Setup (install/update)

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

### 1. Download the latest version of the module.

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Jellyfin/PUQ_WISECP-Jellyfin-latest.zip
```

All versions are available: [https://download.puqcloud.com/WISECP/Product/PUQ\\_WISECP-Jellyfin/](https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Jellyfin/)

### 2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Jellyfin-latest.zip
```

### 3. Copy and Replace "puqJellyfin" from "PUQ\_WISECP-Jellyfin" to "WISECP\_WEB\_DIR/coremio/modules/Product/"

# License Activation

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Jellyfin

The screenshot displays the WISECP administrative interface. The top navigation bar includes links for Settings, Orders (5), Billing, Clients, Tools, WAnalytics, Support, Services, Site Management, Languages, and Help. The 'Services' menu is expanded, showing options like Service Management, Hosting Management, Domain Name Registration, Software Services, Add Group, Module Settings (underlined), Addons, and Order Requirements. Below the navigation bar, there are two summary cards: 'Today Sales (Turnover)' showing €0 and 'Current Cash' showing €0. The 'Module Settings' section is visible, containing three items: 'SSL Certificate' with a 'Manage' button, 'Product License' with a 'Manage' button, and 'Other' with a 'Manage' button (underlined).



Other

Initial Settings

All Modules

Search Within Modules

Write something...



PUQ Jellyfin



PUQ Jellyfin

License key

10 [redacted] AF

2024-01-01T13:06:09+01:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

+ Add New Server

Server Groups

# Setup guide: Jellyfin setup

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### 1. Install Jellyfin on your server

To simplify deployment and help automate this for as many users as possible, we provide a BASH script to handle repo installation as well as installing Jellyfin. All you need to do is run this command on your system

```
wget -O- https://repo.jellyfin.org/install-debuntu.sh | sudo bash
```

### 2. SSL certificate generation:

```
sudo apt install nginx certbot python3-certbot-nginx
```

```
sudo certbot --nginx --agree-tos --redirect --hsts --staple-ocsp --email YOUR_EMAIL -d  
DOMAIN_NAME
```

```
echo "0 0 * * * root certbot renew --quiet --no-self-upgrade --post-hook 'systemctl reload  
nginx'" | sudo tee -a /etc/cron.d/renew_certbot
```

### 3. Configure nginx from a subdomain

Create a file named jellyfin.conf.

```
cd /etc/nginx/conf.d/  
nano jellyfin.conf
```

Then, insert the following text, replacing **DOMAIN\_NAME** with your domain.

```
# Uncomment the commented sections after you have acquired a SSL Certificate
server {
    listen 80;
    listen [::]:80;
    server_name DOMAIN_NAME;

    # Uncomment to redirect HTTP to HTTPS
    return 301 https://$host$request_uri;
}

server {
    listen 443 ssl http2;
    listen [::]:443 ssl http2;
    server_name DOMAIN_NAME;

    ## The default `client_max_body_size` is 1M, this might not be enough for some posters, etc.
    client_max_body_size 20M;

    # use a variable to store the upstream proxy
    # in this example we are using a hostname which is resolved via DNS
    # (if you aren't using DNS remove the resolver line and change the variable to point to an IP
    address e.g `set $jellyfin 127.0.0.1`)
    set $jellyfin 127.0.0.1;
    resolver 127.0.0.1 valid=30;

    ssl_certificate /etc/letsencrypt/live/DOMAIN_NAME/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/DOMAIN_NAME/privkey.pem;
    include /etc/letsencrypt/options-ssl-nginx.conf;
    ssl_dhparam /etc/letsencrypt/ssl-dhparams.pem;
    add_header Strict-Transport-Security "max-age=31536000" always;
    ssl_trusted_certificate /etc/letsencrypt/live/DOMAIN_NAME/chain.pem;
    ssl_stapling on;
    ssl_stapling_verify on;

    # Security / XSS Mitigation Headers
    # NOTE: X-Frame-Options may cause issues with the webOS app
    add_header X-Frame-Options "SAMEORIGIN";
    add_header X-XSS-Protection "0"; # Do NOT enable. This is obsolete/dangerous
```

```

add_header X-Content-Type-Options "nosniff";

# COOP/COEP. Disable if you use external plugins/images/assets
add_header Cross-Origin-Opener-Policy "same-origin" always;
add_header Cross-Origin-Embedder-Policy "require-corp" always;
add_header Cross-Origin-Resource-Policy "same-origin" always;

# Permissions policy. May cause issues on some clients
add_header Permissions-Policy "accelerometer=(), ambient-light-sensor=(), battery=(),
bluetooth=(), camera=(), clipboard-read=(), display-capture=(), document-domain=(), encrypted-
media=(), gamepad=(), geolocation=(), gyroscope=(), hid=(), idle-detection=(), interest-
cohort=(), keyboard-map=(), local-fonts=(), magnetometer=(), microphone=(), payment=(),
publickey-credentials-get=(), serial=(), sync-xhr=(), usb=(), xr-spatial-tracking=()" always;

# Tell browsers to use per-origin process isolation
add_header Origin-Agent-Cluster "?1" always;

# Content Security Policy
# See: https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP
# Enforces https content and restricts JS/CSS to origin
# External Javascript (such as cast_sender.js for Chromecast) must be whitelisted.
# NOTE: The default CSP headers may cause issues with the webOS app
#add_header Content-Security-Policy "default-src https: data: blob: http://image.tmdb.org;
style-src 'self' 'unsafe-inline'; script-src 'self' 'unsafe-inline' https://www.gstatic.com
https://www.youtube.com blob:; worker-src 'self' blob:; connect-src 'self'; object-src
'none'; frame-ancestors 'self'";

location = / {
    return 302 http://$host/web/;
    #return 302 https://$host/web/;
}

location / {
    # Proxy main Jellyfin traffic
    proxy_pass http://$jellyfin:8096;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;

```

```

    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;

    # Disable buffering when the nginx proxy gets very resource heavy upon streaming
    proxy_buffering off;
}

# location block for /web - This is purely for aesthetics so /web/# / works instead of having
to go to /web/index.html/# /
location = /web/ {
    # Proxy main Jellyfin traffic
    proxy_pass http://$jellyfin:8096/web/index.html;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}

location /socket {
    # Proxy Jellyfin Websockets traffic
    proxy_pass http://$jellyfin:8096;
    proxy_http_version 1.1;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection "upgrade";
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header X-Forwarded-Protocol $scheme;
    proxy_set_header X-Forwarded-Host $http_host;
}
}

```

## Restarting nginx

```
sudo service nginx restart
```

# Add server (Jellyfin server)

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Jellyfin

The screenshot displays the WISECP administrative interface. The top navigation bar includes links for Settings, Orders, Billing, Clients, Tools, WAnalytics, Support, Services, Site Management, Languages, and Help. The 'Services' menu is expanded, showing options like Service Management, Hosting Management, Domain Name Registration, Software Services, Add Group, Module Settings, Addons, and Order Requirements. The 'Module Settings' option is highlighted. Below the navigation bar, there are two summary cards: 'Today Sales (Turnover)' and 'Current Cash'. The main content area is titled 'Module Settings' and contains three sections: 'SSL Certificate', 'Product License', and 'Other'. Each section has a 'Manage' button.

WISECP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Service Management Add Group  
Hosting Management Module Settings  
Domain Name Registration Addons  
Software Services Order Requirements

€0 Today Sales (Turnover) Yesterday €0 Current Month Expenses

Module Settings

SSL Certificate Manage

Product License Manage

Other Manage



Other

Initial Settings

All Modules

Search Within Modules

Write something...

PUQ Jellyfin

3. In the opened page, click the '**Add Server**' button.

Initial Settings

All Modules

PUQ Jellyfin

License key

1QAASZ-ZBCXZX-FL8H9A-WKVVQA-UAHZAF

2024-01-01T13:06:09+01:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

Add New Server

Server Groups

Servers Jellyfin

10

Show Record

Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
6	jellyfin-test.uuq.pl	active	Default		jellyfin-test.uuq.pl	2/111	<div></div> <div></div>

Showing records from 1 to 1 - 1

Prev

1

Next


Turn Back

4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Emby server you are connecting to.

- **Username:** is the username for the account on [Jellyfin](#).
- **Password:** is the password for the account on [Jellyfin](#).
- **Access Hash:** API key that you created in the previous step on the Emby server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Initial Settings
All Modules



PUQ Jellyfin

< Go to Back

### Add New Server

Name
jellyfin-test.uuq.pl

Maximum Number of Accounts
100

Server Group
Default

Default
☐ Set as default server in group

IP Address or Domain
jellyfin-test.uuq.pl

Username
admin

Password

Access Hash

SSL
☒ Connect using SSL

Port
443
☐ Change standard port

Test Connection
Test Connection

Connection test Successful

Add New Server

# Service configuration

## Jellyfin module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.
2. Create New Service Group

Go to

Services -> Service Management -> Add Group

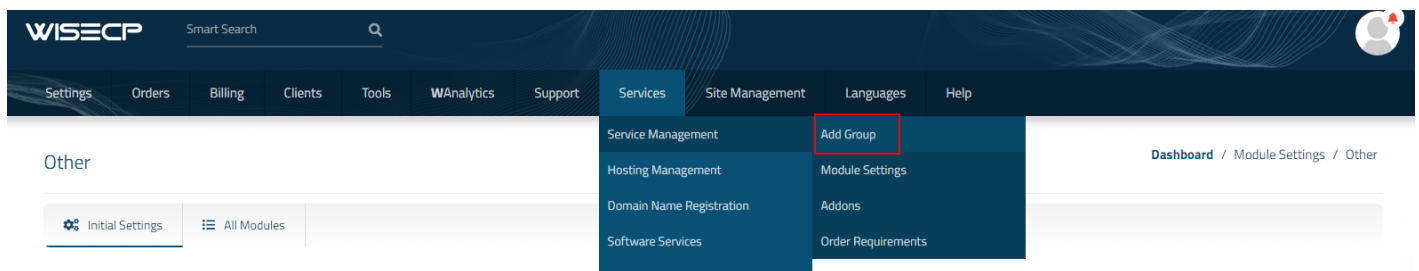

Enter all the necessary data and click the **'Create Group'** button.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

Create New Service Group

Dashboard / Create New Service Group

Create a new service group, you can also create new categories and manage the existing one from here.

ENUKRURDPTPLNLLVKAITIDHUFRAESELDECSBSAR

Title

Media

Short Detail

Short Group Description

Listing Template

☒ Box List ☐ Horizontal List

Status

Enable

Background Image

(optional)

Group Colour

#FFFFFF

Order Upgrades

☐ Allow clients to upgrade to higher package in the same service group

External HTML Code

Paste your HTML code to this field (Optional)

You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty

### 3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

WISECP

Smart Search

SettingsOrdersBillingClientsToolsWAnalyticsSupportServicesSite ManagementLanguagesHelp

€0

Today Sales (Turnover)

Yesterday

€0

€0

Current Cash

Current Month Expenses

€0

0

Overdue Invoice (Total €0)

Payment Date Upcoming (Total €0 / Last 7 Days)

0

Client Registration (Today)

Yesterday

0

0

Pending Support Tickets

Total Resolved

0

0

Order in the Process (Total €0)

0

Reminder (Will Happen Today)

Service Management

Hosting Management

Domain Name Registration

Software Services


International SMS Services

Google SEO Services

VPN

Media

In the opened window, click the **'Create New Service'** button.

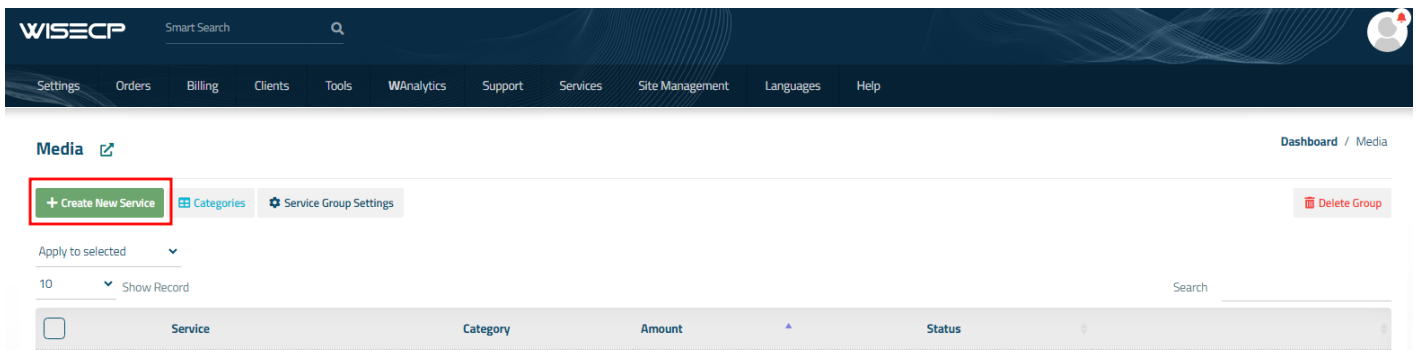

On the opened page, enter all the necessary details for your new service and navigate to the 'Core' tab.

Select the '**PUQ Jellyfin**' module from the drop-down list of modules.

Detail

Core

Optional Addons

Requirements

Upgradeable Products

Pricing

Module

PUQ Jellyfin

Server Group

Default (Servers: 1)

Use All Libraries

☐ select all libraries together

Username prefix

jelly-

Will be attached to the beginning of username. Only small letters and numbers and symbol "-".

Libraries

Movies  
Cartoons

Username suffix

-fin

Will be appended to the end of username. Only small letters and numbers and symbol "-".

Streaming bitrate limit

50  
Mbps

SyncPlay access

Allow user to create and join groups

Sync playback with other devices

User sessions

3

A value of 0 will disable the feature.

Failed login attempts

3

before user is locked out. Setting this to -1 will disable the feature

Remote control

☐ Remote control of shared devices

Media downloads

☒ Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.

Allow Playback Media

☒

Allow Playback Audio

☒ audio that requires transcoding

Allow Playback Video

☒ video that requires transcoding

Allow Playback Video

☐ video that requires conversion without re-encoding

Allow Live TV access

☐

Allow Live TV recording management

☐

Force transcoding of remote media sources such as Live TV

☐

Link to instruction

https://doc.puq.info/books/Jellyfin-wisecp-module

A link to the instruction will be reflected in the client area.

Automatic Setup

☒ Please activate for automatic installation of the order. Otherwise, administrator approval is required.

Create Product

4. Fill in the configuration options according to your preferences.

Libraries:

- **Use All Libraries:** Choosing all of libraries from your Jellyfin server
- **Libraries:** The libraries you want to make available to customers of this product.

**(IMPORTANT! Start a new line for each new library)**

Example:

"Movies

Beginner`s Programming Course

Comedy"

**IMPORTANT!**

If you have a folder named "-", please enter it not as the first one or rename it.  
If you don't want any folder to be accessible, type "-".

## User Configuration:

- **Streaming bitrate limit:** An optional per-stream bitrate limit for all out of network devices. This is useful to prevent devices from requesting a higher bitrate than your internet connection can handle. This may result in increased CPU load on your server in order to transcode videos on the fly to a lower bitrate.
- **SyncPlay access:** The SyncPlay feature enables to sync playback with other devices. Select the level of access this user has to the SyncPlay
- **Remote control:** Remote control of shared devices (DLNA devices are considered shared until a user begins controlling them)
- **Media downloads:** Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.
- **User sessions:** Set the maximum number of simultaneous user sessions.  
A value of 0 will disable the feature.
- **Failed login attempts:** Determine how many incorrect login tries can be made before lockout occurs.  
A value of zero means inheriting the default of three tries for normal users and five for administrators. Setting this to -1 will disable the feature.
- **Username prefix/Username suffix:** Necessary in order to generate a username for the service, in the format: **prefix<client\_id>--<service\_id>suffix**

Allow playback (Restricting access to transcoding may cause playback failures in clients due to unsupported media formats)

- **media**
- **audio that requires transcoding**
- **video that requires transcoding**
- **video that requires conversion without re-encoding**

Feature access:

- **Allow Live TV access**
- **Allow Live TV recording management**
- **Force transcoding of remote media sources such as Live TV**

## Links

- **Link to instruction:** Link to the instruction, if filled out, it will be reflected in the client area
-

# Add new library/item in Jellyfin

Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

## New library:

To create a new library, you should to **create a folder** in your jellyfin server.

First, navigate to the root of your project "/" and enter the following commands:


```
cd mnt
```

```
mkdir LIBRARY_NAME
```


**LIBRARY\_NAME** - The name of the new library.

After creating a folder, let's create a library in Jellyfin:


Add a new library:

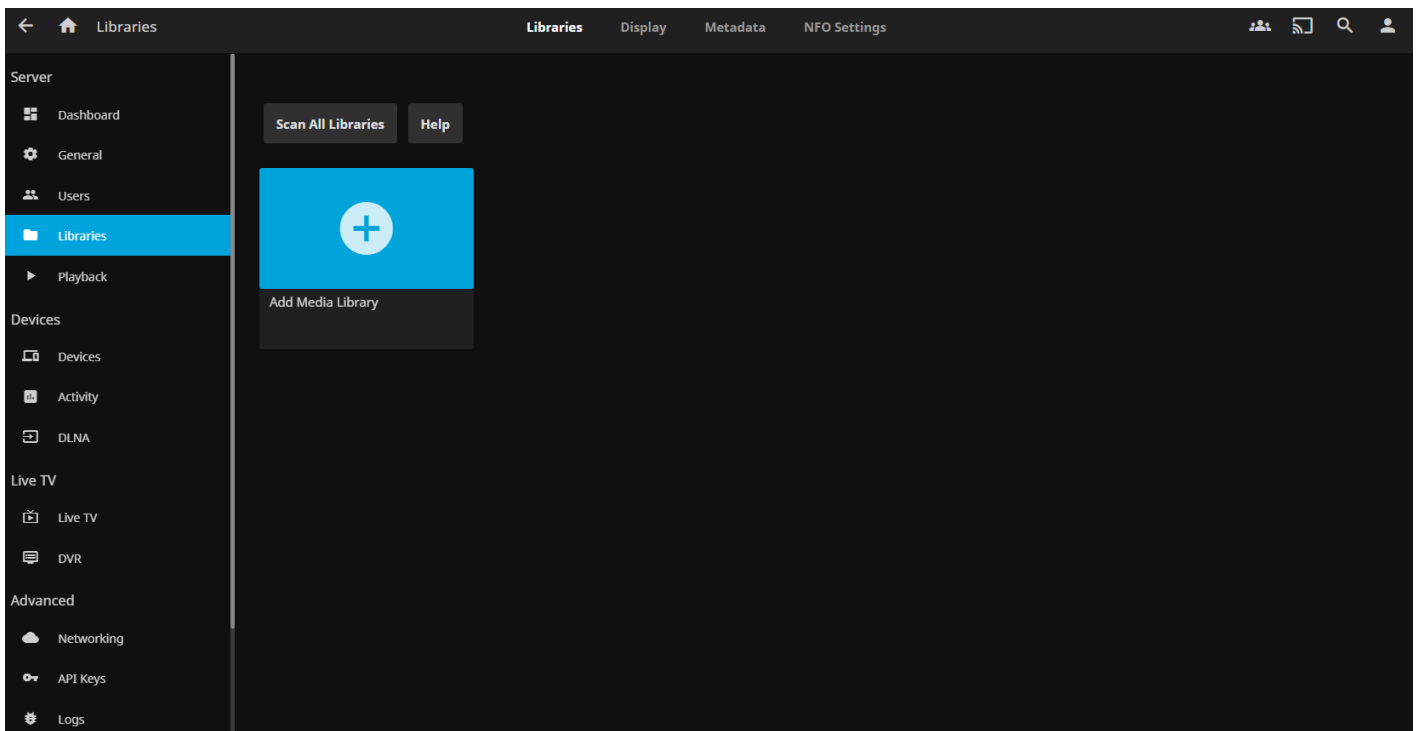

Assign the appropriate folder to this library:

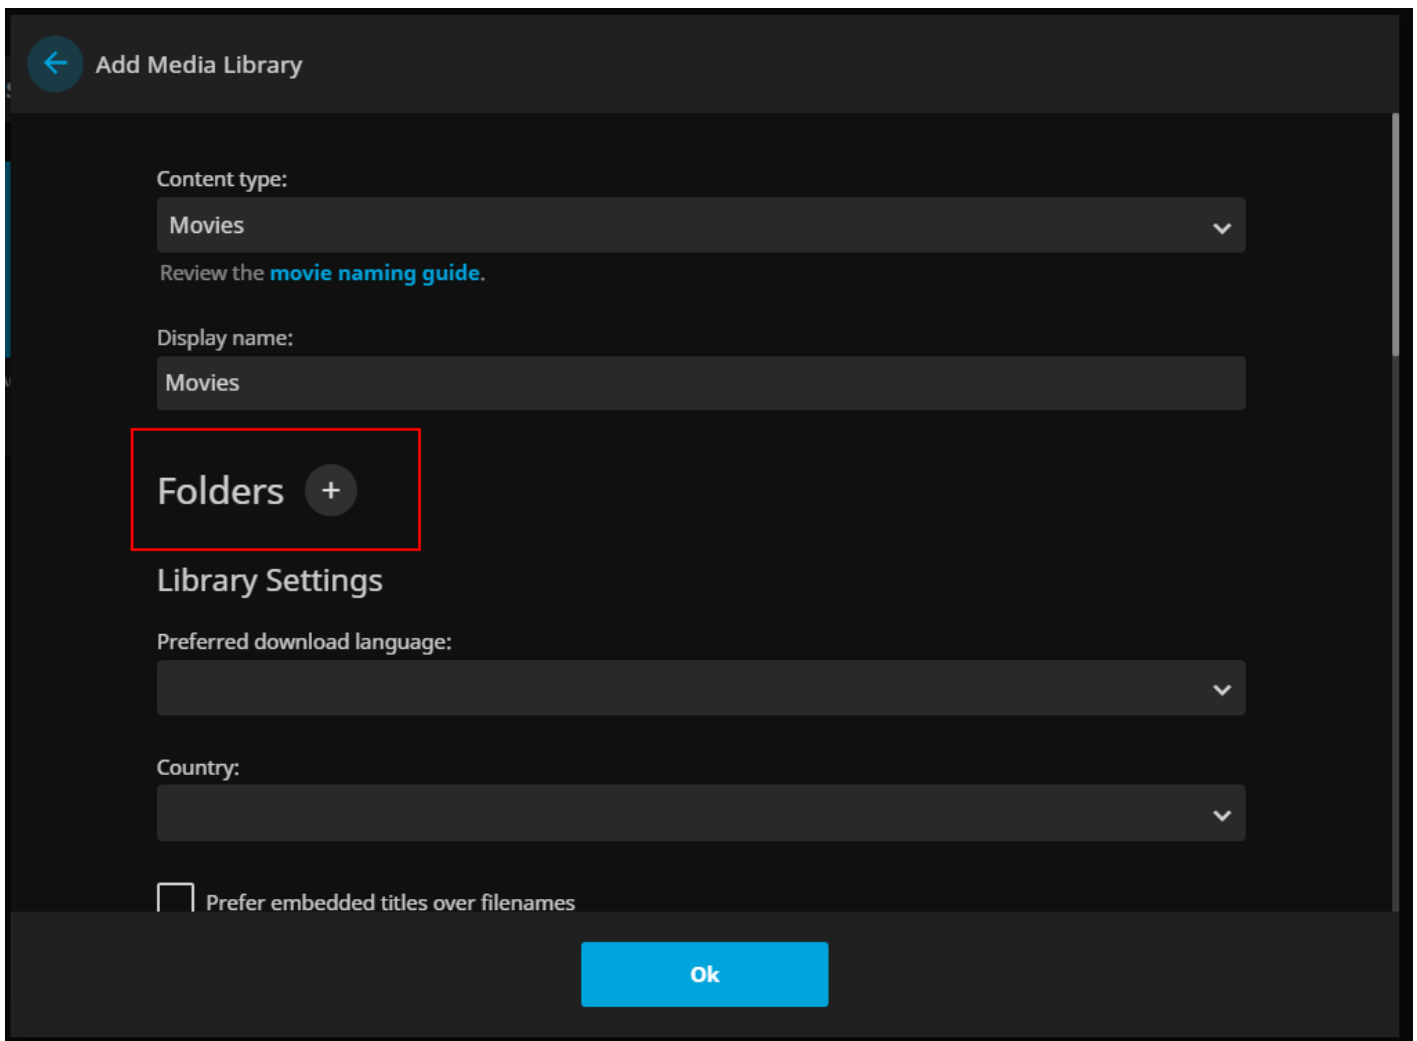



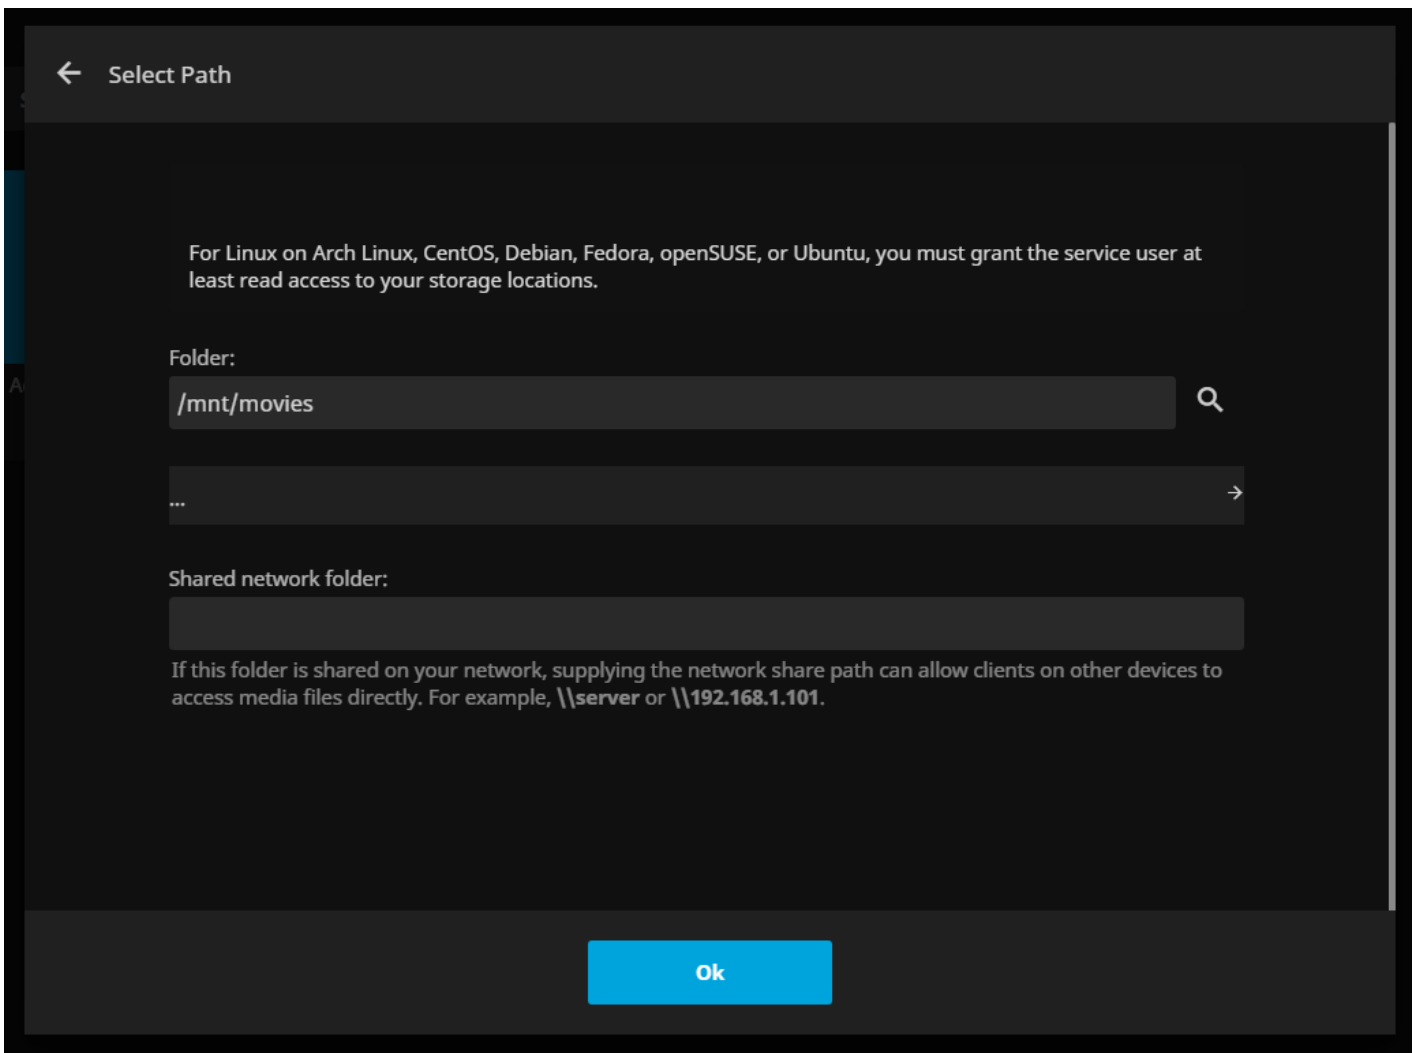

## New item:

To download a new item, navigate to the root of your project "/" and enter the following commands:

```
cd mnt/LIBRARY_NAME
```


```
wget DOWNLOAD_ITEM_URL
```

**LIBRARY\_NAME** - The name of the library.

**DOWNLOAD\_ITEM\_URL** - The download URL of the item you want to upload to the server.

# After all

Scan all libraries by clicking on the "Scan All Libraries" button. To scan a specific library, click on the three dots and select "Scan Library".

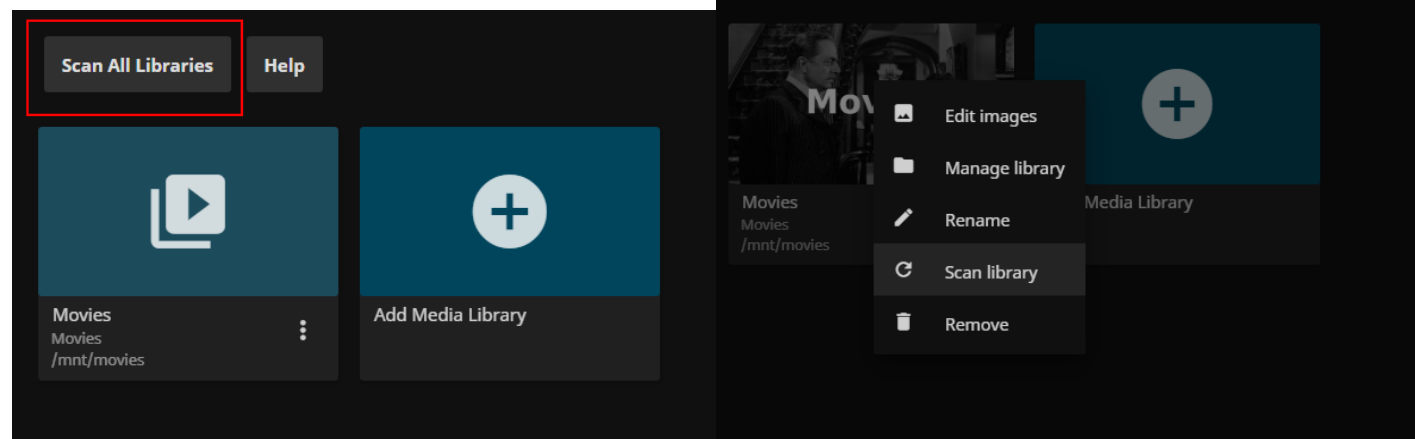


# Getting Access Hash (API key)

Jellyfin module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

Dashboard -> API Keys


## Create a new API Key

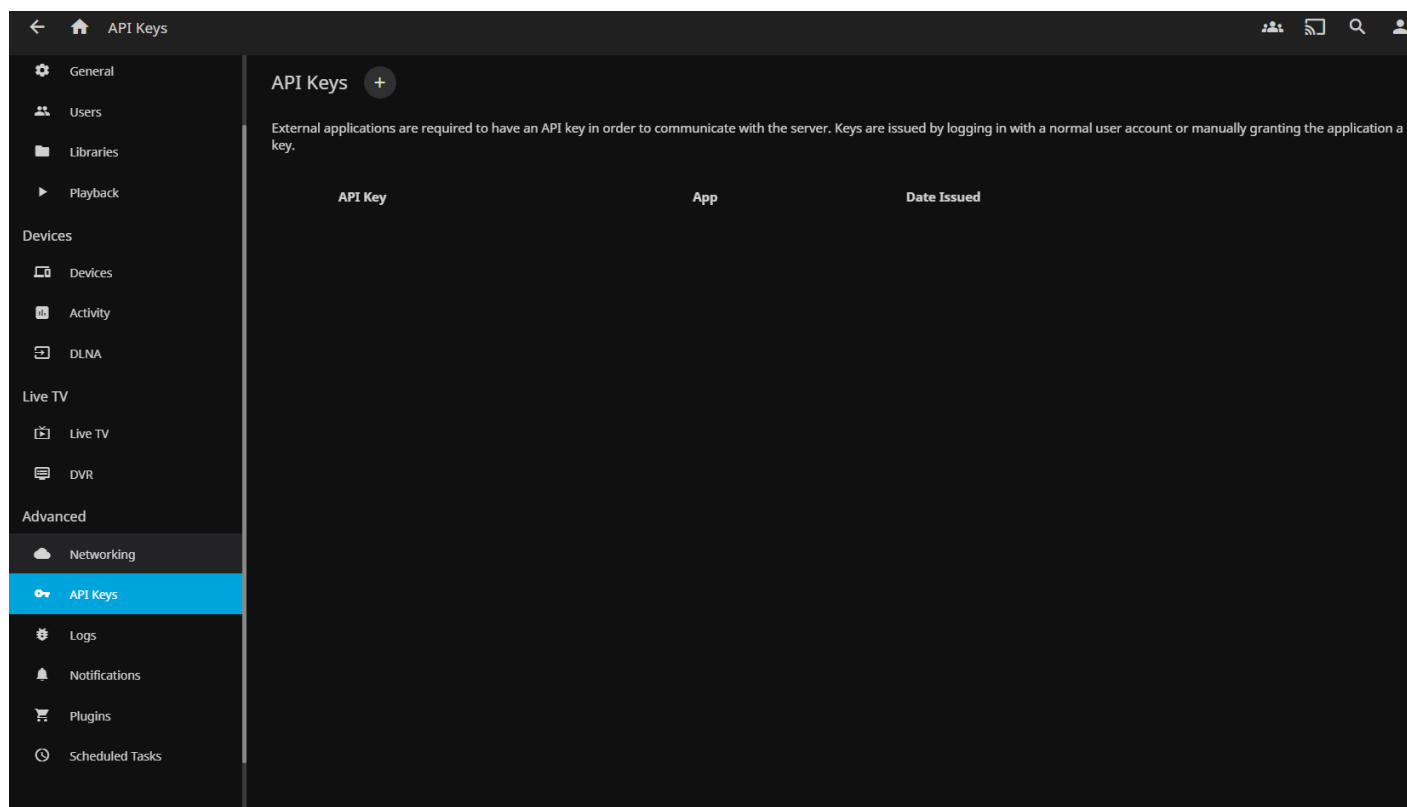

Whrite an App Name

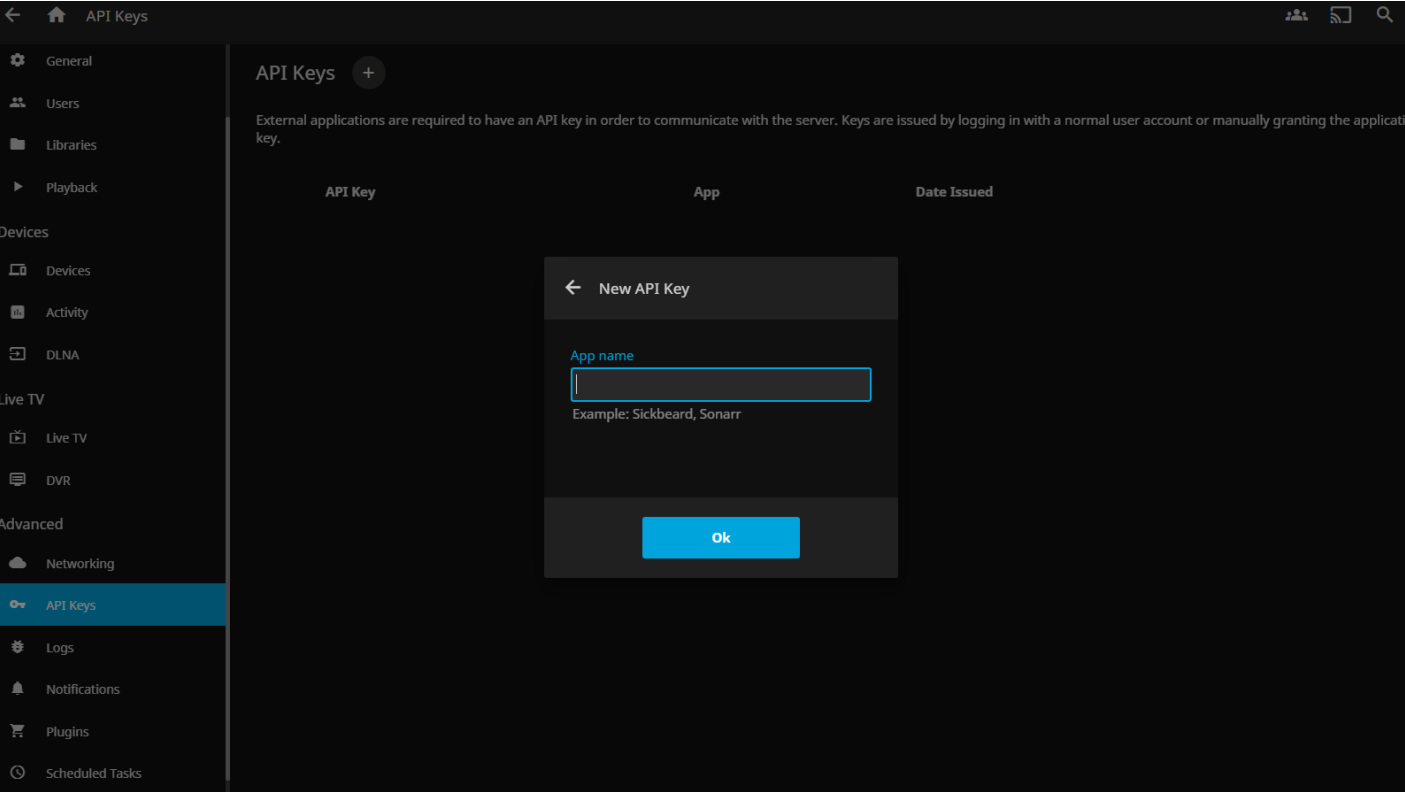

Now you can getting an API key

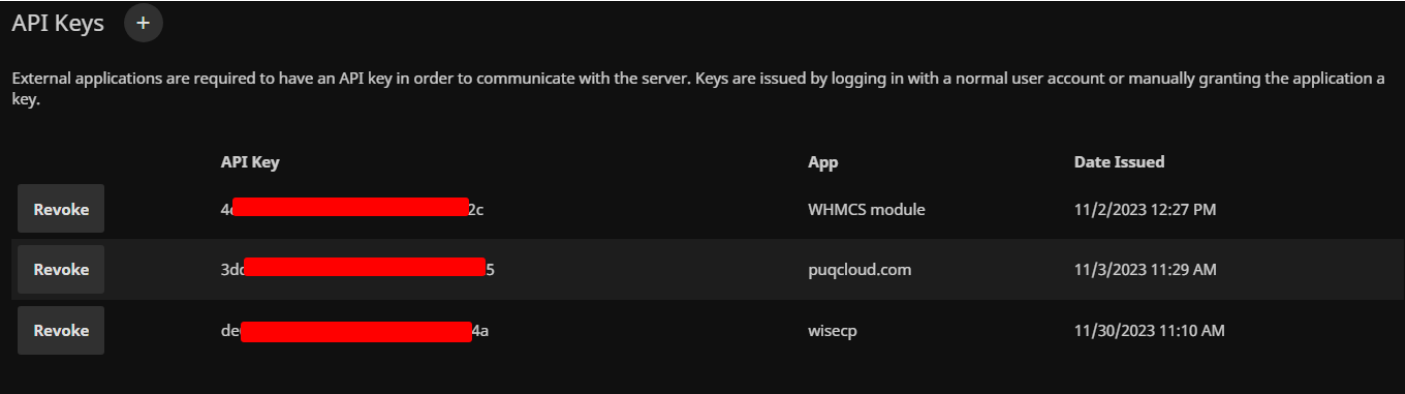

# Client Area

# Product Home Screen

## Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

The end customer, after logging in to his own customer panel, has access to the following information and options

- Link to the user manual (which was defined by the administrator when setting up the service.).
- Jellyfin server address
- Authorization data
- User informations
- List of active devices
- List of enabled user libraries
- Drop all devices
- Unblock user
- Change the Jellyfin user password

Screenshot of the client area



Details	Additional Services	Upgrade	Cancellation Request	Order ID #193
---------	---------------------	---------	----------------------	------------------



Renew Now

General Information		Invoice #305
Service Group	Media	
Service Name	Jellyfin	
Services Status	<div>Active</div>	
Payment Period	Monthly	
Renewed On	08.07.2024	
Next Due Date	08.08.2024	
Amount : 11zł		

User manual

Web Interface

Drop All Devices

Unblock User

Management Media account

Usernamejelly-4-193-fin

StatusEnable

Password .....

Save

Libraries

Beginner's Programming Course

Clips

Movies

Playlists

Failed Login Attempt	1/3
Active Sessions	0/3
Active Devices	10  Show Record

Search		
Device Name	App Name	Last Activity
No data available in table		
No Records		
Prev		Next





# Admin Area

# Order Detail

Jellyfin module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Navigate to the service you want to manage, then go to the '**Core**' tab.

Jellyfin Order Detail

Dashboard / Orders / Jellyfin Order Detail

Detail

Core

Blocks

Order Addons

Requirements

Upgrade / Downgrade

History

Cancellation / Refund

API Module

PUQ Jellyfin

Drop All Devices

Unblock User

API answer OK

Username: jelly-4-194-fin Is Disabled : NO

Beginner's Programming Course

Streaming bitrate limit	Active Sessions	Failed Login Attempt	Sync Play Access
60 Mbps	1/3	2/3	Allow user to join groups

10

Show Record

Search

Device Name	App Name	Last Activity
Edge Chromium	Jellyfin Web	2024-07-08T12:36:43.9502049Z

Showing records from 1 to 1 - 1

Prev

1

Next

Username

jelly-4-194-fin

Password

XEAKTINJ

Server

Jellyfin

Overwrite package settings

☐

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐

To apply the changes on the server, it is necessary to check this checkbox.

Update

In the opened tab, you have a view of the online status of the service. The available online information includes:

- Connection status to the API
- Information about the Jellyfin account on the **Jellyfin** server
- Information about the account

Also, below are fields with the client's personal data.

You can also individually override package options for the client by checking the '**Overwrite package settings**' box.

After modifying the configuration options, check the '**Send changes to server**' box to save the data to the Jellyfinserver.



Username	jelly-4-133-fin	Password	Js46hzq4kF1b	Server	jellyfin-test.uuq.pl
Server Group	Default (Servers: 1)	Use All Libraries	<input type="checkbox"/> select all libraries together		
Username prefix	jelly-	Libraries	Movies		
Will be attached to the beginning of username. Only small letters and numbers and symbol "-"					
Username suffix	-fin	Streaming bitrate limit	50	Mbps	
Will be appended to the end of username. Only small letters and numbers and symbol "-"					
SyncPlay access	Allow user to create and join groups	User sessions	3	A value of 0 will disable the feature.	
Sync playback with other devices					
Failed login attempts	3	Remote control	<input checked="" type="checkbox"/>	Remote control of shared devices	
before user is locked out. Setting this to -1 will disable the feature					
Media downloads	<input checked="" type="checkbox"/> Users can download media and store it on their devices. This is not the same as a sync feature. Book libraries require this enabled to function properly.	Allow Playback Media	<input checked="" type="checkbox"/>		
Allow Playback Audio	<input checked="" type="checkbox"/> audio that requires transcoding	Allow Playback Video	<input type="checkbox"/>	video that requires transcoding	
Allow Playback Video	<input checked="" type="checkbox"/> video that requires conversion without re-encoding	Allow Live TV access	<input type="checkbox"/>		
Allow Live TV recording management	<input checked="" type="checkbox"/>	Force transcoding of remote media sources such as Live TV	<input type="checkbox"/>		
Link to instruction	<a href="https://doc.puq.info/books/jellyfin-wisecp-m">https://doc.puq.info/books/jellyfin-wisecp-m</a> A link to the instruction will be reflected in the client area.				
Overwrite package settings	<input checked="" type="checkbox"/>	Overwriting the package settings is necessary to personalize the service if you need it.			
Send changes to server	<input checked="" type="checkbox"/>	To apply the changes on the server, it is necessary to check this checkbox.			

Update

