


Add server (PUQVPNCP) in WISECP

WireGuard Business-VPN module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.


Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ WireGuard Business- VPN

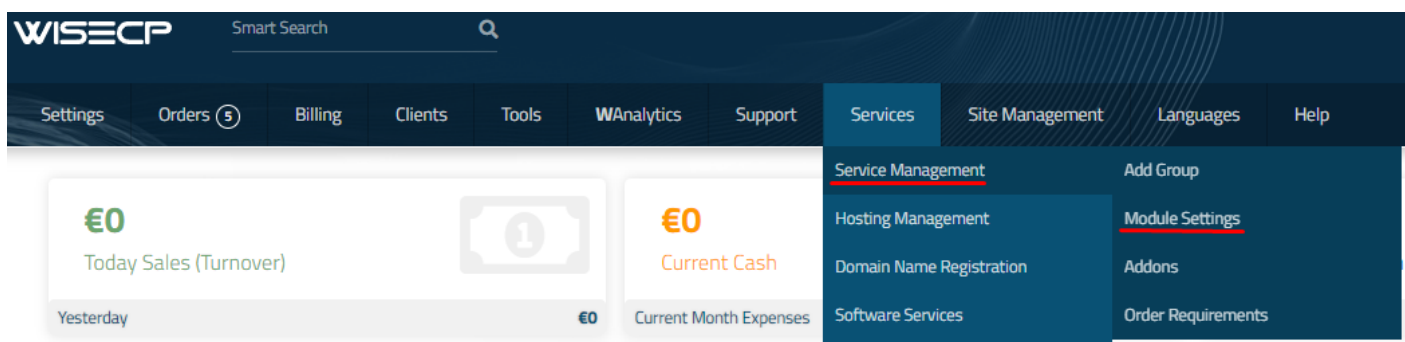

WISCP Smart Search


Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Module Settings




SSL Certificate

Manage



Product License

Manage



Other

Manage

WISCP Smart Search

Settings Orders (5) Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other

Initial Settings

All Modules

WISCP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other

Dashboard / Module Settings

Initial Settings

All Modules

Search Within Modules

Write something...

PUQ WireGuard Business-VPN


3. In the opened page, click the '**Add Server**' button.

WIS3CP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Other Dashboard / Module Settings /

Initial Settings All Modules

PUQ WireGuard Business-VPN 

License key TI4J5Y- MQLNSQ 2023-12-16T21:57:37+01:00 [Check and Save](#)

Version: 1.0 [Web Site](#) [Documentation](#) [Changelog](#)

[+ Add New Server](#) [Server Groups](#)

Servers [PUQVPNCP](#)

10 [Show Record](#) Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
5	dev.softkeel.com	active	Default	✔	dev.softkeel.com	1/10	Edit Delete

Showing records from 1 to 1 - 1 [Prev](#) [1](#) [Next](#)

4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **Main Public IP Address:** is the public IP that will be used in those services which will utilize a single public IP for all.
- **DNS 1 and DNS 2:** are DNS servers that will be specified in the configuration of WireGuard clients.
- **IP Address or Domain:** The address of the PUQVPNCP server you are connecting to
- **Access Hash:** API key that you created in the previous step on the PUQVPNCP server. (IP addresses should be configured on the interfaces in PUQVPNCP.)
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

[Go to Back](#)

Add New Server

Name	dev.softkeel.com	
Maximum Number of Accounts	10	
Server Group	Default	
Default	<input type="checkbox"/> Set as default server in group	
Main Public IP Address	77.87.125.200	
DNS 1	77.87.125.10	
DNS 2	77.87.125.20	
Assigned IP Addresses (One per line)	<div>77.87.125.201</div> <div>77.87.125.202</div> <div>77.87.125.203</div> <div>77.87.125.204</div> <div>77.87.125.205</div> <div>77.87.125.206</div> <div>77.87.125.207</div> <div>77.87.125.208</div> <div>77.87.125.209</div>	
IP Address or Domain	dev.softkeel.com	
	e7472a16f59154643385eee5d6c313857106dfe8a12acdc8b77722af8f2fc3d4394a977b191889d8	
Access Hash		
SSL	<input checked="" type="checkbox"/> Connect using SSL	
Port	443 <input type="checkbox"/> Change standard port	
Test Connection	<input type="button" value="Test Connection"/>	

Add New Server

Revision #1

Created 25 November 2023 21:57:47 by Ruslan

Updated 25 November 2023 22:06:34 by Ruslan