

# Nextcloud WISECP module

The module is used to create customer accounts on the previously prepared Nextcloud server. Thanks to the module, the company is able to offer public cloud services to its customers. The module enables the definition of multiple public cloud packages. The module creates a customer account according to the selected package. The client can have many independent accounts in the cloud. For the correct operation of the module, a pre-prepared Nextcloud installation is required (the module does not assist in the installation of the Nextcloud server and assumes that such installation is ready for operation.)

- [Description](#)
- [Changelog](#)
- [Installation and configuration guide](#)
  - [Setup \(install/update\)](#)
  - [License Activation](#)
  - [Setup guide: Nextcloud setup](#)
  - [Add server \(Nextcloud\) in WISECP](#)
  - [Service/Product configuration](#)
- [Admin Area](#)
  - [Order Detail](#)
- [Client Area](#)
  - [Product Home Screen](#)

# Description

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### Requirements

WISECP: v3.1.5+, php: v8.x, Ironic: V12+

Nextcloud: v20+

## Preface

Thanks to the module, the company is able to offer public cloud services to its customers based on Nextcloud accounts.

The module is used to create customer accounts on the previously prepared Nextcloud server. The module enables You to define multiple public cloud packages and sell them at different prices. The module creates a customer account according to the selected package. The client can have many independent accounts in the cloud.

For the correct operation of the module, a pre-prepared Nextcloud installation is required (the module does not assist in the installation of the Nextcloud server and assumes that such installation is ready for operation through API.) Module use Nextcloud API to manage clients account.

We have prepared a detailed installation manual for the module, including all the steps needed to implement the module, including the preparation of the Nextcloud server, including all installation steps such as NGINX, PHP, Nextcloud, SSL certificates etc.

## Functions:

- Auto create and deploy client account

- The module uses only the API to manage the accounts
- Module supports multilingualism (**Arabic, Bosnian, Czech, German, Greek, English, Spanish, Persian, French, Hungarian, Indonesian, Italian, Georgian, Latvian, Dutch, Polish, Portuguese, Romanian, Ukrainian**)
- The module shows the current data usage by the user
- Link to instructions for setting up the service in the client area.

## Available options in the admin panel:

- Create users
- Suspend users
- Terminate users
- Unsuspend users
- Change users password
- Change Package
- API connection status
- NextCloud Disk status

## Available options in the client panel:

- Change the NextCloud user password
- NextCloud Disk status

Screenshot of the client area

Details

Additional Services

Upgrade

Cancellation Request

Order ID #153

Renew Now

Used space (GB)

Free 500 (100%)

Free

General Information

Invoice #182

Service Group	Storage
Service Name	Nextcloud 5 GB
Services Status	Active
Payment Period	Monthly
Renewed On	17.01.2024
Next Due Date	24.02.2024
Amount : 23,84zł	

User manual

Storage used0 GB (0%)

Storage free500 GB (100%)

Storage total500 GB

Web interface address

https://nextcloud-test.uuq.pl/

Username

wisecp-2-153-cloud

Password

Generate

••••••••

Save

Screenshot of the Admin area

Nextcloud 10 GB Order Detail

Dashboard / Orders / Nextcloud 10 GB Order Detail

Detail

Core

Blocks

Order Addons

Requirements

Upgrade / Downgrade

History

Cancellation / Refund

API Module

PUQ Nextcloud

API answer OK

Display Name/Email	Status	Groups	Storage	Storage used	Storage free	Storage total
Ruslan Poloviy ruslan.poloviy@puq.pl	enabled	USER	/var/nc_data/wisecp-2-149-cloud	0.274 GB (2.74%)	9.726 GB (97.26%)	10 GB

Server

nextcloud-test.uuq.pl

Username

wisecp-2-149-cloud

Password

9CBZjIBFXNEI

Overwrite package settings

☐ Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐ To apply the changes on the server, it is necessary to check this checkbox.

Update

# Changelog

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### v1.1 Released 15-02-2024

- Introduced a "Show" button for displaying service passwords in the Client Area.
  - Fixed a bug with some cases where it was not possible to delete the server
  - Improved security
- 

### v1.0 Released 11-12-2023

First version

# Installation and configuration guide

# Setup (install/update)

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

To install and update a module, you must perform one and the same action.

### 1. Download the latest version of the module.

```
wget http://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Nextcloud/PUQ_WISECP-Nextcloud-latest.zip
```

All versions are available: [https://download.puqcloud.com/WISECP/Product/PUQ\\_WISECP-Nextcloud/](https://download.puqcloud.com/WISECP/Product/PUQ_WISECP-Nextcloud/)

### 2. Unzip the archive with the module.

```
unzip PUQ_WISECP-Nextcloud-latest.zip
```

### 3. Copy and Replace "puqNextcloud" from "PUQ\_WISECP-Nextcloud" to "WISECP\_WEB\_DIR/coremio/modules/Product/"



# License Activation

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Nextcloud

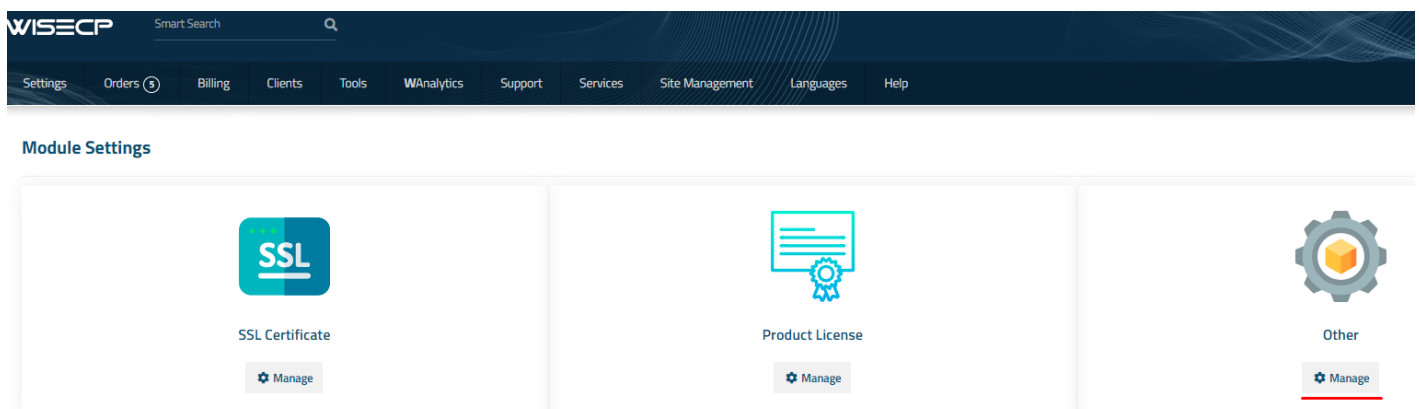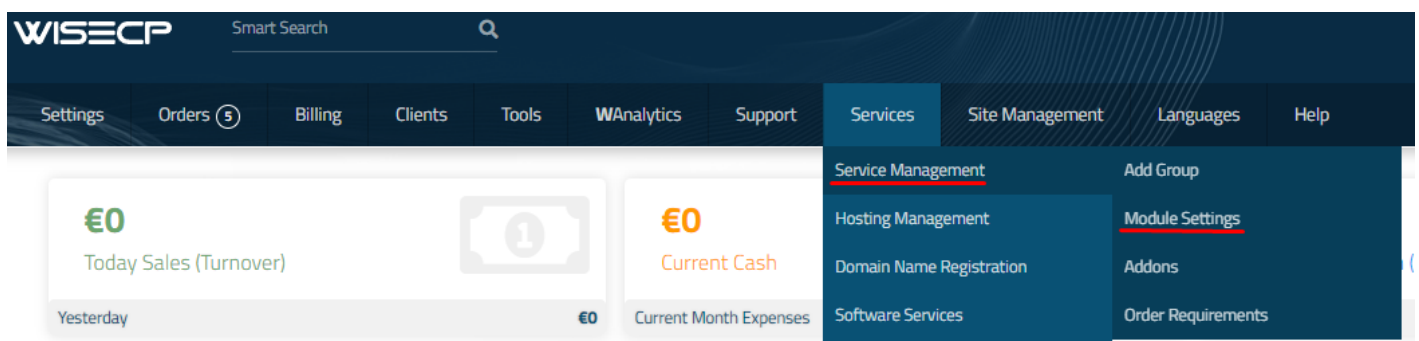

## Other

- Initial Settings **All Modules**

Other Dashboard / Module Settings / Other

- Initial Settings **All Modules**

### Search Within Modules

Write something...

- PUQ Nextcloud

3. On the open page, enter the purchased license key for this product and click the '**Check and Save**' button to validate the key and save it.

Other Dashboard / Module Settings

- Initial Settings **All Modules**

### PUQ Nextcloud



#### License key

GDSFNX- -U2APKG

2024-01-08T16:11:39+01:00

Check and Save

#### Version: 1.0

Web Site

Documentation

Changelog

+ Add New Server

Server Groups

Servers [Nextcloud](#)

# Setup guide: Nextcloud setup

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Nextcloud including Nextcloud Office on Debian10 with nginx, MariaDB, PHP 8.1, Let's Encrypt, Redis, Fail2ban and ufw

### 1. Preparation and installation of the nginx web server

to install the following software packages as a necessary basis for server operation:

```
apt-get install -y apt-transport-https bash-completion bzip2 ca-certificates cron curl dialog
dirmngr ffmpeg ghostscript git gpg gnupg gnupg2 htop jq libfile-fcntllock-perl libfontconfig1
libfuse2 locate lsb-release net-tools rsyslog screen smbclient socat software-properties-
common ssl-cert tree unzip wget zip
```

Enter the future server name in both the hosts file and the hostname file

```
nano /etc/hosts
```

```
127.0.0.1 localhost
public_IP your.domain.de
```

The server name must be specified as an FQDN, i.e. fully qualified:

```
nano /etc/hostname
```

```
your.domain.de
```

```
reboot now
```

Make sure the **"debian-archive-keyring"** package is installed:

Add the nginx key to your server:

```
apt install -y debian-archive-keyring
curl https://nginx.org/keys/nginx_signing.key | gpg --dearmor | tee /usr/share/keyrings/nginx-archive-keyring.gpg >/dev/null
```

Add the software sources for nginx and PHP:

```
echo "deb [signed-by=/usr/share/keyrings/nginx-archive-keyring.gpg]
http://nginx.org/packages/mainline/debian `lsb_release -cs` nginx" | tee
/etc/apt/sources.list.d/nginx.list
echo "deb [arch=amd64] https://packages.sury.org/php/ $(lsb_release -cs) main" | tee
/etc/apt/sources.list.d/php.list
```

In order to be able to trust the PHP sources as well, we also add this key:

```
wget -q0 - https://packages.sury.org/php/apt.gpg | apt-key add -
```

Preparation of MariaDB – database server:

```
wget https://downloads.mariadb.com/MariaDB/mariadb_repo_setup
chmod +x mariadb_repo_setup && ./mariadb_repo_setup --mariadb-server-version="mariadb-10.8"
```

We are now updating the system and generating temporary "self-signed" certificates, which will later be replaced with full-fledged Let's Encrypt certificates.

**Server update:**

```
apt update && make-ssl-cert generate-default-snakeoil -y
```

To ensure that no relics from previous installations are interfering with the operation of the web server, we remove these:

```
apt remove nginx nginx-extras nginx-common nginx-full -y --allow-change-held-packages
```

We also make sure that the counterpart (Apache2) to the nginx web server is neither active nor installed.

```
systemctl stop apache2.service  
systemctl disable apache2.service
```

Now the preparations for installing the web server are complete and we can install it with the following command

```
apt install -y nginx
```

and the service to start automatically after a system reboot using set up

```
systemctl enable nginx.service
```

With a view to future adjustments, the default configuration is saved and a new configuration file opened:

```
mv /etc/nginx/nginx.conf /etc/nginx/nginx.conf.bak  
touch /etc/nginx/nginx.conf && nano /etc/nginx/nginx.conf
```

Copy all of the following content into the file:

```
user www-data;  
worker_processes auto;  
pid /var/run/nginx.pid;  
events {  
    worker_connections 2048;  
    multi_accept on; use epoll;  
}  
http {  
    log_format criegerde escape=json  
    '{  
        "time_local": "$time_local",  
        "remote_addr": "$remote_addr",  
        "remote_user": "$remote_user",  
        "request": "$request",'
```

```

    "status": "$status",'
    "body_bytes_sent": "$body_bytes_sent",'
    "request_time": "$request_time",'
    "http_referrer": "$http_referer",'
    "http_user_agent": "$http_user_agent"
  }';
access_log /var/log/nginx/access.log criegerde;
error_log /var/log/nginx/error.log warn;
#set_real_ip_from 127.0.0.1;
real_ip_header X-Forwarded-For;
real_ip_recursive on;
include /etc/nginx/mime.types;
default_type application/octet-stream;
sendfile on;
send_timeout 3600;
tcp_nopush on;
tcp_nodelay on;
open_file_cache max=500 inactive=10m;
open_file_cache_errors on;
keepalive_timeout 65;
reset_timedout_connection on;
server_tokens off;
resolver 127.0.0.53 valid=30s;
resolver_timeout 5s;
include /etc/nginx/conf.d/*.conf;
}

```

Save the file and close it to then restart the web server:

```
systemctl restart nginx.service
```

In preparation for the SSL certificates and the web directories, we create four folders and set the correct permissions:

```

mkdir -p /var/log/nextcloud /var/nc_data /var/www/letsencrypt/.well-known/acme-challenge
/etc/letsencrypt/rsa-certs /etc/letsencrypt/ecc-certs
chown -R www-data:www-data /var/nc_data /var/www /var/log/nextcloud

```

The installation of the web server is thus already completed and we continue with the installation and the adjustments of PHP.

## 2. Installation and configuration of PHP 8.1 (fpm)

The PHP repository has already been set up and activated in the previous chapter, so we can start the installation directly.

```
apt update && apt install -y php-common \
php8.1-
{fpm, gd, curl, xml, zip, intl, mbstring, bz2, ldap, apcu, bcmath, gmp, imagick, igbinary, mysql, redis, smbcli
\
imagemagick --allow-change-held-packages
```

Optional (if you plan to use Samba and/or cifs shares or an LDAP(s) connection):

```
apt install -y ldap-utils nfs-common cifs-utils
```

Set the correct date format to enable correct logging as well:

```
timedatectl set-timezone Europe/Warsaw
```

Before we start optimizing PHP, let's back up the configuration files:

```
cp /etc/php/8.1/fpm/pool.d/www.conf /etc/php/8.1/fpm/pool.d/www.conf.bak
cp /etc/php/8.1/fpm/php-fpm.conf /etc/php/8.1/fpm/php-fpm.conf.bak
cp /etc/php/8.1/cli/php.ini /etc/php/8.1/cli/php.ini.bak
cp /etc/php/8.1/fpm/php.ini /etc/php/8.1/fpm/php.ini.bak
cp /etc/php/8.1/fpm/php-fpm.conf /etc/php/8.1/fpm/php-fpm.conf.bak
cp /etc/php/8.1/mods-available/apcu.ini /etc/php/8.1/mods-available/apcu.ini.bak
cp /etc/ImageMagick-6/policy.xml /etc/ImageMagick-6/policy.xml.bak
```

To adapt PHP to your system, some parameters are calculated, just execute the following lines:

```
AvailableRAM=$(awk ' /MemAvailable/ {printf "%d", $2/1024}' /proc/meminfo)
AverageFPM=$(ps --no-headers -o 'rss,cmd' -C php-fpm8.1 | awk '{ sum+=$1 } END { printf
("%d\n", sum/NR/1024, "M") }' )
FPMS=$(( AvailableRAM/AverageFPM ))
PMaxSS=$(( FPMS*2/3 ))
PMinSS=$(( PMaxSS/2 ))
PStarTS=$(( ( PMaxSS+PMinSS ) /2 ) )
```

```
sed -i "s;/env\[ HOSTNAME\] = /env[ HOSTNAME] = /" /etc/php/8.1/fpm/pool.d/www.conf
sed -i "s;/env\[ TMP\] = /env[ TMP] = /" /etc/php/8.1/fpm/pool.d/www.conf
sed -i "s;/env\[ TMPDIR\] = /env[ TMPDIR] = /" /etc/php/8.1/fpm/pool.d/www.conf
sed -i "s;/env\[ TEMP\] = /env[ TEMP] = /" /etc/php/8.1/fpm/pool.d/www.conf
sed -i "s;/env\[ PATH\] = /env[ PATH] = /" /etc/php/8.1/fpm/pool.d/www.conf
sed -i 's/pm = dynamic/pm = static/' /etc/php/8.1/fpm/pool.d/www.conf
sed -i 's/pm.max_children =.*/pm.max_children = '$FPMS'/' /etc/php/8.1/fpm/pool.d/www.conf
sed -i 's/pm.start_servers =.*/pm.start_servers = '$PStartS'/'
/etc/php/8.1/fpm/pool.d/www.conf
sed -i 's/pm.min_spare_servers =.*/pm.min_spare_servers = '$PMinSS'/'
/etc/php/8.1/fpm/pool.d/www.conf
sed -i 's/pm.max_spare_servers =.*/pm.max_spare_servers = '$PMaxSS'/'
/etc/php/8.1/fpm/pool.d/www.conf
sed -i "s;/pm.max_requests =.*/pm.max_requests = 1000/" /etc/php/8.1/fpm/pool.d/www.conf
sed -i "s/allow_url_fopen =.*/allow_url_fopen = 1/" /etc/php/8.1/fpm/php.ini

sed -i "s/output_buffering =.*/output_buffering = 'Off'/" /etc/php/8.1/cli/php.ini
sed -i "s/max_execution_time =.*/max_execution_time = 3600/" /etc/php/8.1/cli/php.ini
sed -i "s/max_input_time =.*/max_input_time = 3600/" /etc/php/8.1/cli/php.ini
sed -i "s/post_max_size =.*/post_max_size = 10240M/" /etc/php/8.1/cli/php.ini
sed -i "s/upload_max_filesize =.*/upload_max_filesize = 10240M/" /etc/php/8.1/cli/php.ini
sed -i "s;/date.timezone.*/date.timezone = Europe\\\\"Berlin/" /etc/php/8.1/cli/php.ini
sed -i "s;/cgi.fix_pathinfo.*/cgi.fix_pathinfo=0/" /etc/php/8.1/cli/php.ini

sed -i "s/memory_limit = 128M/memory_limit = 1G/" /etc/php/8.1/fpm/php.ini
sed -i "s/output_buffering =.*/output_buffering = 'Off'/" /etc/php/8.1/fpm/php.ini
sed -i "s/max_execution_time =.*/max_execution_time = 3600/" /etc/php/8.1/fpm/php.ini
sed -i "s/max_input_time =.*/max_input_time = 3600/" /etc/php/8.1/fpm/php.ini
sed -i "s/post_max_size =.*/post_max_size = 10G/" /etc/php/8.1/fpm/php.ini
sed -i "s/upload_max_filesize =.*/upload_max_filesize = 10G/" /etc/php/8.1/fpm/php.ini
sed -i "s;/date.timezone.*/date.timezone = Europe\\\\"Berlin/" /etc/php/8.1/fpm/php.ini
sed -i "s;/cgi.fix_pathinfo.*/cgi.fix_pathinfo=0/" /etc/php/8.1/fpm/php.ini
sed -i "s;/session.cookie_secure.*/session.cookie_secure = True/" /etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.enable=.*/opcache.enable=1/" /etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.validate_timestamps=.*/opcache.validate_timestamps=0/"
/etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.enable_cli=.*/opcache.enable_cli=1/" /etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.memory_consumption=.*/opcache.memory_consumption=256/"
```

```

/etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.interned_strings_buffer=.*/opcache.interned_strings_buffer=32/"
/etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.max_accelerated_files=.*/opcache.max_accelerated_files=100000/"
/etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.revalidate_freq=.*/opcache.revalidate_freq=60/" /etc/php/8.1/fpm/php.ini
sed -i "s;/opcache.save_comments=.*/opcache.save_comments=1/" /etc/php/8.1/fpm/php.ini

sed -i "s|;emergency_restart_threshold.*| emergency_restart_threshold = 10| g"
/etc/php/8.1/fpm/php-fpm.conf
sed -i "s|;emergency_restart_interval.*| emergency_restart_interval = 1m| g"
/etc/php/8.1/fpm/php-fpm.conf
sed -i "s|;process_control_timeout.*| process_control_timeout = 10| g" /etc/php/8.1/fpm/php-fpm.conf

sed -i '$aapc.enable_cli=1' /etc/php/8.1/mods-available/apcu.ini

sed -i "s/rights=\"none\" pattern=\"PS\"/rights=\"read| write\" pattern=\"PS\"/"
/etc/ImageMagick-6/policy.xml
sed -i "s/rights=\"none\" pattern=\"EPS\"/rights=\"read| write\" pattern=\"EPS\"/"
/etc/ImageMagick-6/policy.xml
sed -i "s/rights=\"none\" pattern=\"PDF\"/rights=\"read| write\" pattern=\"PDF\"/"
/etc/ImageMagick-6/policy.xml
sed -i "s/rights=\"none\" pattern=\"XPS\"/rights=\"read| write\" pattern=\"XPS\"/"
/etc/ImageMagick-6/policy.xml

```

Now restart both services, nginx and PHP:

```
systemctl restart php8.1-fpm.service nginx.service
```

PHP is now already installed and optimized for Nextcloud. For more PHP optimizations. Let's start with the installation and configuration of the database server MariaDB.

### 3. Installation and configuration of MariaDB 10.8

MariaDB is installed with this command:

```
apt update && apt install -y mariadb-server
```

Now let's harden the database server using the supplied tool "mysql\_secure\_installation". With an

initial installation, there is no root password, so you can confirm the query with ENTER. It is recommended to set a password directly, the corresponding dialog will appear automatically:

```
mysql_secure_installation
Enter current password for root (enter for none): <ENTER> or type the password
Switch to unix_socket authentication [Y/n] Y
Set root password? [Y/n] Y
Remove anonymous users? [Y/n] Y
Disallow root login remotely? [Y/n] Y
Remove test database and access to it? [Y/n] Y
Reload privilege tables now? [Y/n] Y
```

Now stop the database server and then save the default configuration so that you can make adjustments immediately afterwards:

```
systemctl stop mysql
mv /etc/mysql/my.cnf /etc/mysql/my.cnf.bak
nano /etc/mysql/my.cnf
```

Copy all of the following lines into the empty file:

```
[client]
default-character-set = utf8mb4
port = 3306
socket = /var/run/mysqld/mysqld.sock
[mysqld_safe]
log_error=/var/log/mysql/mysql_error.log
nice = 0
socket = /var/run/mysqld/mysqld.sock
[mysqld]
basedir = /usr
bind-address = 127.0.0.1
binlog_format = ROW
bulk_insert_buffer_size = 16M
character-set-server = utf8mb4
collation-server = utf8mb4_general_ci
concurrent_insert = 2
connect_timeout = 5
datadir = /var/lib/mysql
default_storage_engine = InnoDB
expire_logs_days = 2
```

```
general_log_file = /var/log/mysql/mysql.log
general_log = 0
max_connections = 200
max_heap_table_size = 64M
myisam_sort_buffer_size = 512M
port = 3306
pid-file = /var/run/mysqld/mysqld.pid
query_cache_limit = 2M
query_cache_size = 64M
query_cache_type = 1
query_cache_min_res_unit = 2k
read_buffer_size = 2M
read_rnd_buffer_size = 1M
skip-external-locking
skip-name-resolve
slow_query_log_file = /var/log/mysql/mariadb-slow.log
slow-query-log = 1
socket = /var/run/mysqld/mysqld.sock
sort_buffer_size = 4M
table_open_cache = 400
thread_cache_size = 128
tmp_table_size = 64M
tmpdir = /tmp
transaction_isolation = READ-COMMITTED
[isamchk]
key_buffer = 16M
```

Save and close the file and then restart the database server to set up the Nextcloud database, the Nextcloud user and its password:

```
systemctl restart mysql.service
mysql -uroot -p
CREATE DATABASE nextclouddb CHARACTER SET utf8mb4 COLLATE utf8mb4_general_ci; CREATE USER
nextclouddbuser@localhost identified by 'nextclouddbpassword'; GRANT ALL PRIVILEGES on
nextclouddb.* to nextclouddbuser@localhost; FLUSH privileges; quit;
```

#### “ Explanation :

Database name: **nextclouddb**

Database user: **nextclouddbuser**

Database user password: **nextcloudbpassword**

```
mysql -h localhost -uroot -p -e "SELECT @@TX_ISOLATION; SELECT SCHEMA_NAME 'database',  
default_character_set_name 'charset', DEFAULT_COLLATION_NAME 'collation' FROM  
information_schema.SCHEMATA WHERE SCHEMA_NAME='nextcloudb' "
```

## 4. Installing and configuring Redis

We install the Redis server to increase Nextcloud performance, as Redis reduces the load on the MariaDB Nextcloud database:

```
apt update && apt install -y redis-server
```

Customize the Redis configuration by backing up and customizing the configuration by running the following commands:

```
cp /etc/redis/redis.conf /etc/redis/redis.conf.bak  
sed -i "s/port 6379/port 0/" /etc/redis/redis.conf  
sed -i "s/\# unixsocket/unixsocket/g" /etc/redis/redis.conf  
sed -i "s/unixsocketperm 700/unixsocketperm 770/" /etc/redis/redis.conf  
sed -i "s/# maxclients 10000/maxclients 10240/" /etc/redis/redis.conf  
usermod -aG redis www-data  
cp /etc/sysctl.conf /etc/sysctl.conf.bak  
sed -i '$avm.overcommit_memory = 1' /etc/sysctl.conf
```

Based on sufficient installation experience, I recommend that you restart the entire server once:

```
reboot now
```

Congratulations, the server is already installed and set up, so you can start setting up the Nextcloud.

## 5. Installation and optimization of Nextcloud (incl. SSL)

You need to replace **yourdomain.com** with your own domain

Certbot is a console based certificate generation tool for Let's Encrypt.

In this recipe, we will generate a Let's Encrypt certificate using Certbot. This certificate will then be deployed for use in the Nextcloud server.

## Install Certbot

```
sudo apt update
sudo apt-get install certbot python3-certbot-nginx
```

We will now set up various vhost, i.e. Swegterver configuration files, and modify the standard vhost file persistently. Since the system was previously restarted, we switch back to privileged user mode, save the default vhost file called default.conf and create empty vhost files for configuration.

```
sudo -s
[ -f /etc/nginx/conf.d/default.conf ] && mv /etc/nginx/conf.d/default.conf
/etc/nginx/conf.d/default.conf.bak
touch /etc/nginx/conf.d/nextcloud.conf
```

```
nano /etc/nginx/conf.d/nextcloud.conf
```

Copy all the following lines into the ***nextcloud.conf***

```
upstream php-handler {
    server unix: /run/php/php8.1-fpm.sock;
}

map $arg_v $asset_immutable {
    "" "";
    default "immutable";
}

server {
    listen 80 default_server;
    server_name nextcloud-test.uuq.pl;
    return 301 https: //$host$request_uri;
}
```

```

server {
    listen 443      ssl http2;
    listen [::]:443 ssl http2;
    server_name yourdomain.com;

    ssl_certificate /etc/letsencrypt/live/yourdomain.com/fullchain.pem;
    ssl_certificate_key /etc/letsencrypt/live/yourdomain.com/privkey.pem;
    ssl_trusted_certificate /etc/letsencrypt/live/yourdomain.com/cert.pem;

    ssl_session_timeout 1d;
    ssl_session_cache shared:SSL:50m;
    ssl_session_tickets off;
    ssl_protocols TLSv1.3 TLSv1.2;
    ssl_ciphers 'TLS-CHACHA20-POLY1305-SHA256:TLS-AES-256-GCM-SHA384:ECDHE-RSA-AES256-GCM-SHA512:DHE-RSA-AES256-GCM-SHA512:ECDHE-RSA-AES256-GCM-SHA384:DHE-RSA-AES256-GCM-SHA384';
    ssl_ecdh_curve X448:secp521r1:secp384r1;
    ssl_prefer_server_ciphers on;
    ssl_stapling on;
    ssl_stapling_verify on;
    client_max_body_size 10G;
    client_body_timeout 3600s;
    fastcgi_buffers 64 4K;
    gzip on;
    gzip_vary on;
    gzip_comp_level 4;
    gzip_min_length 256;
    gzip_proxied expired no-cache no-store private no_last_modified no_etag auth;
    gzip_types application/atom+xml application/javascript application/json application/ld+json
application/manifest+json application/rss+xml application/vnd.geo+json application/vnd.ms-fontobject application/wasm application/x-font-ttf application/x-web-app-manifest+json
application/xhtml+xml application/xml font/opentype image/bmp image/svg+xml image/x-icon
text/cache-manifest text/css text/plain text/vcard text/vnd.rim.location.xloc text/vtt text/x-component text/x-cross-domain-policy;
    add_header Strict-Transport-Security "max-age=15768000; includeSubDomains;
preload;" always;
    add_header Permissions-Policy "interest-cohort=()";
    add_header Referrer-Policy "no-referrer" always;
    add_header X-Content-Type-Options "nosniff" always;
    add_header X-Download-Options "noopen" always;

```

```

add_header X-Frame-Options                "SAMEORIGIN"    always;
add_header X-Permitted-Cross-Domain-Policies "none"          always;
add_header X-Robots-Tag                    "none"          always;
add_header X-XSS-Protection                "1; mode=block" always;
fastcgi_hide_header X-Powered-By;
root /var/www/nextcloud;
index index.php index.html /index.php$request_uri;
location = / {
    if ( $http_user_agent ~ ^DavClnt ) {
        return 302 /remote.php/webdav/$is_args$args;
    }
}
location = /robots.txt {
    allow all;
    log_not_found off;
    access_log off;
}
location ^~ /apps/rainloop/app/data {
    deny all;
}
location ^~ /.well-known {
location = /.well-known/carddav { return 301 /remote.php/dav/; }
location = /.well-known/caldav { return 301 /remote.php/dav/; }
location /.well-known/acme-challenge { try_files $uri $uri/ =404; }
location /.well-known/pki-validation { try_files $uri $uri/ =404; }
    return 301 /index.php$request_uri;
}
location ~ ^/(?: build| tests| config| lib| 3rdparty| templates| data)(?: $| /) { return 404; }
location ~ ^/(?: \. | autotest| occ| issue| indie| db_ | console) { return 404; }
location ~ \.php(?: $| /) {
    rewrite
^/(?! index| remote| public| cron| core\/ajax\/update| status| ocs\/v[12]| updater\/. +| oc[ms]-
provider\/. +| . +\/richdocumentscode\/proxy) /index.php$request_uri;
    fastcgi_split_path_info ^(.+?\.php)(/.*)$;
    set $path_info $fastcgi_path_info;
    try_files $fastcgi_script_name =404;
    include fastcgi_params;
    fastcgi_param SCRIPT_FILENAME $document_root$fastcgi_script_name;
    fastcgi_param PATH_INFO $path_info;
    fastcgi_param HTTPS on;

```

```

fastcgi_param modHeadersAvailable true;
fastcgi_param front_controller_active true;
fastcgi_pass php-handler;
fastcgi_intercept_errors on;
fastcgi_request_buffering off;
fastcgi_read_timeout 3600;
fastcgi_send_timeout 3600;
fastcgi_connect_timeout 3600;
fastcgi_max_temp_file_size 0;
}
location ~ \.(?:css|js|svg|gif|png|jpg|ico|wasm|tflite|map)$ {
    try_files $uri /index.php$request_uri;
    add_header Cache-Control "public, max-age=15778463, $asset_immutable";
    expires 6M;
    access_log off;
    location ~ \.wasm$ {
        default_type application/wasm;
    }
}
location ~ \.woff2?$ {
    try_files $uri /index.php$request_uri;
    expires 7d;
    access_log off;
}
location /remote {
    return 301 /remote.php$request_uri;
}
location / {
    try_files $uri $uri/ /index.php$request_uri;
}
}

```

## Generate Let's Encrypt cert

```
sudo certbot --nginx -d yourdomain.com
```

## Restart **nginx** web server

```
sudo service nginx restart
```

**In order for the certificate to be updated automatically, you must add to the crontab**

```
crontab -e
```

```
0 12 * * * /usr/bin/certbot renew --quiet
```

We now start the 'actual' installation of the Nextcloud software and set up the SSL certificates from Let's Encrypt using acme . To do this, switch to the working directory

```
cd /usr/local/src
```

and download the current Nextcloud release:

```
wget https://download.nextcloud.com/server/releases/latest.tar.bz2
wget https://download.nextcloud.com/server/releases/latest.tar.bz2.md5
```

Check the files:

```
md5sum -c latest.tar.bz2.md5 < latest.tar.bz2
```

Unpack the Nextcloud software into the web directory (var/www), then set the permissions appropriately and delete the download file:

```
tar -xjf latest.tar.bz2 -C /var/www && chown -R www-data:www-data /var/www/ && rm -f
latest.tar.bz2
```

We can now proceed with setting up the Nextcloud. To do this, use the following "silent" installation command:

```
sudo -u www-data php /var/www/nextcloud/occ maintenance:install --database "mysql" --database-
name "nextcloudodb" --database-user "nextcloudodbuser" --database-pass "nextcloudodbpassword" --
admin-user "YourNextcloudAdmin" --admin-pass "YourNextcloudAdminPasssword" --data-dir
"/var/nc_data"
```

### “ Explanations:

database-name " **nextcloudodb** " : database name from

database-user “ **nextcloudodbuser** ” : Database user from

database-pass “ **nextcloudpassword** ” : Database user password from

admin-user “ **YourNextcloudAdmin** ” : freely selectable by you

admin-pass “ **YourNextcloudAdminPasssword** ” : freely selectable by you

Wait until the installation of the Nextcloud has been completed and then adjust the central configuration file of the Nextcloud "config.php" as the web user www-data :

1. Add your domain as a trusted domain, adding your dedicated domain to your.domain.de :

```
sudo -u www-data php /var/www/nextcloud/occ config:system:set trusted_domains 0 --  
value=ihre.domain.de
```

2. Set your domain as overwrite.cli.url, adding your.domain.de with your dedicated domain:

```
sudo -u www-data php /var/www/nextcloud/occ config:system:set overwrite.cli.url --  
value=https://ihre.domain.de
```

Now we finally expand the Nextcloud configuration. To do this, first save the existing config.php and then execute the following lines in one block:

```
sudo -u www-data cp /var/www/nextcloud/config/config.php  
/var/www/nextcloud/config/config.php.bak  
sudo -u www-data touch /var/www/nextcloud/config/tweaks.config.php
```

```
nano /var/www/nextcloud/config/tweaks.config.php
```

```
<?php  
$CONFIG = array (  
    [ 'activity_expire_days' => 14,  
    [ 'allow_local_remote_servers' => true,  
    [ 'auth.bruteforce.protection.enabled' => true,  
    [ 'blacklisted_files' =>  
        [array (  
            [0] => '.htaccess',  
            [1] => 'Thumbs.db',  
            [2] => 'thumbs.db',  
        )],  
    [ 'cron_log' => true,  
    [ 'default_phone_region' => 'DE',
```

```
[ defaultapp' => 'files, dashboard',
[ enable_previews' => true,
[ enabledPreviewProviders' =>
[ array (
[[0 => 'OC\Preview\PNG',
[[1 => 'OC\Preview\JPEG',
[[2 => 'OC\Preview\GIF',
[[3 => 'OC\Preview\BMP',
[[6 => 'OC\Preview\PDF',
[[7 => 'OC\Preview\MP3',
[[8 => 'OC\Preview\TXT',
[[9 => 'OC\Preview\MarkDown',
],
[ filesystem_check_changes' => 0,
[ filelocking.enabled' => 'true',
[ htaccess.RewriteBase' => '/',
[ integrity.check.disabled' => false,
[ knowledgebaseenabled' => false,
[ logfile' => '/var/log/nextcloud/nextcloud.log',
[ loglevel' => 2,
[ logtimezone' => 'Europe/Berlin',
[ log_rotate_size' => '104857600',
[ maintenance' => false,
[ maintenance_window_start' => 1,
[ overwriteprotocol' => 'https',
[ preview_max_x' => 1024,
[ preview_max_y' => 768,
[ preview_max_scale_factor' => 1,
[ profile.enabled' => false,
[ redis' =>
[ array (
[[ host' => '/var/run/redis/redis-server.sock',
[[ port' => 0,
[[ timeout' => 0.5,
[[ dbindex' => 1,
],
[ quota_include_external_storage' => false,
[ share_folder' => '/Freigaben',
[ skeletondirectory' => '',
[ theme' => '',
```

```
    trashbin_retention_obligation' => 'auto, 7',  
    updater.release.channel' => 'stable',  
);
```

Modify the ".user.ini"

```
sudo -u www-data sed -i "s/output_buffering=.*/output_buffering=0/"  
/var/www/nextcloud/.user.ini
```

and adjust the Nextcloud apps as user www-data

```
sudo -u www-data php /var/www/nextcloud/occ app:disable survey_client  
sudo -u www-data php /var/www/nextcloud/occ app:disable firstrunwizard  
sudo -u www-data php /var/www/nextcloud/occ app:enable admin_audit  
sudo -u www-data php /var/www/nextcloud/occ app:enable files_pdfviewer
```

Optional Nextcloud Office:

```
sudo -u www-data /usr/bin/php /var/www/nextcloud/occ app:install richdocuments  
sudo -u www-data /usr/bin/php /var/www/nextcloud/occ app:install richdocumentscode
```

Nextcloud is now fully operational, optimized and secured. Restart all relevant services:

```
systemctl stop nginx.service  
systemctl stop php8.1-fpm.service  
systemctl restart mysql.service  
systemctl restart php8.1-fpm.service  
systemctl restart redis-server.service  
systemctl restart nginx.service
```

Set up a cronjob for Nextcloud as a "www-data" user:

```
crontab -u www-data -e
```

Paste this line

```
*/5 * * * * php -f /var/www/nextcloud/cron.php > /dev/null 2>&1
```

Then save and close the file and reconfigure the Nextcloud job from "Ajax" to "Cron" using the Nextclouds CLI:

```
sudo -u www-data php /var/www/nextcloud/occ background: cron
```

Please take some time and check the security status of your server.

To avoid difficulties that can result from updating the components used, the relevant packages can be excluded from updating using "apt-mark hold":

```
apt-mark hold nginx*
apt-mark hold redis*
apt-mark hold mysql*
apt-mark hold galera*
apt-mark hold mariadb*
apt-mark hold php*
```

In order to include these packages again in the context of updates, only the "hold" has to be lifted:

```
apt-mark unhold nginx*
apt-mark unhold redis*
apt-mark unhold mysql*
apt-mark unhold galera*
apt-mark unhold mariadb*
apt-mark unhold php*
```

After updating, we recommend setting it to 'hold' again.

## 6. System hardening fail2banand ufw

```
apt update && apt install -y fail2ban
```

```
touch /etc/fail2ban/filter.d/nextcloud.conf
```

Copy everything from "cat..." to "...EOF" to your clipboard, then paste it into the shell:

```
cat <<EOF >/etc/fail2ban/filter.d/nextcloud.conf
[Definition]
_groupsre = (?: (?: , ?\s*" \w+": (?: "[ ^"] +" | \w+)) *)
failregex = ^\{%( _groupsre )s, ?\s*"remoteAddr": "<HOST>"%( _groupsre )s, ?\s*"message": "Login
failed:
            ^\{%( _groupsre )s, ?\s*"remoteAddr": "<HOST>"%( _groupsre )s, ?\s*"message": "Trusted
domain error.
datepattern = , ?\s*"time" \s*: \s*" %Y- %m- %d[ T ] %H: %M: %S( %z) ?"
```

EOF

Confirm with <ENTER> to fill the file. The result then looks like this:

```
cat /etc/fail2ban/filter.d/nextcloud.conf
```

```
[Definition]
_groupsre = (?:(:|,|(?!\s"\w+":(?:"[^"]+"|\w+))*)
failregex = ^\{(%(_groupsre)s,?\s*"remoteAddr": "<HOST>"(%(_groupsre)s,?\s*"message": "Login failed:
            ^\{(%(_groupsre)s,?\s*"remoteAddr": "<HOST>"(%(_groupsre)s,?\s*"message": "Trusted domain error.
datepattern = ,?\s*"time"\s*:\s*"%%Y-%%m-%%d[T ]%%H:%%M:%%S(%%z)?"
```

Now create a new jail file

```
nano /etc/fail2ban/jail.d/nextcloud.local
```

Copy all of the following lines into it:

```
[nextcloud]
backend = auto
enabled = true
port = 80,443
protocol = tcp
filter = nextcloud
maxretry = 5
bantime = 3600
findtime = 36000
logpath = /var/log/nextcloud/nextcloud.log
```

Restart fail2ban and check the fail2ban status:

```
systemctl restart fail2ban.service
fail2ban-client status nextcloud
```

💡 If you have previously changed the SSH port from 22 to another port, you must replace 22 accordingly!

```
apt install -y ufw  
ufw allow 80/tcp comment "LetsEncrypt(http)"  
ufw allow 443/tcp comment "LetsEncrypt(https)"  
ufw allow 22/tcp comment "SSH"
```

```
ufw enable  
systemctl restart ufw.service
```

---



# Add server (Nextcloud) in WISECP

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

1. Log in to the administrative area of your **WISECP**.
2. Go to module configuration.

Services -> Service Management -> Module Settings -> Other -> All Modules -> PUQ Nextcloud

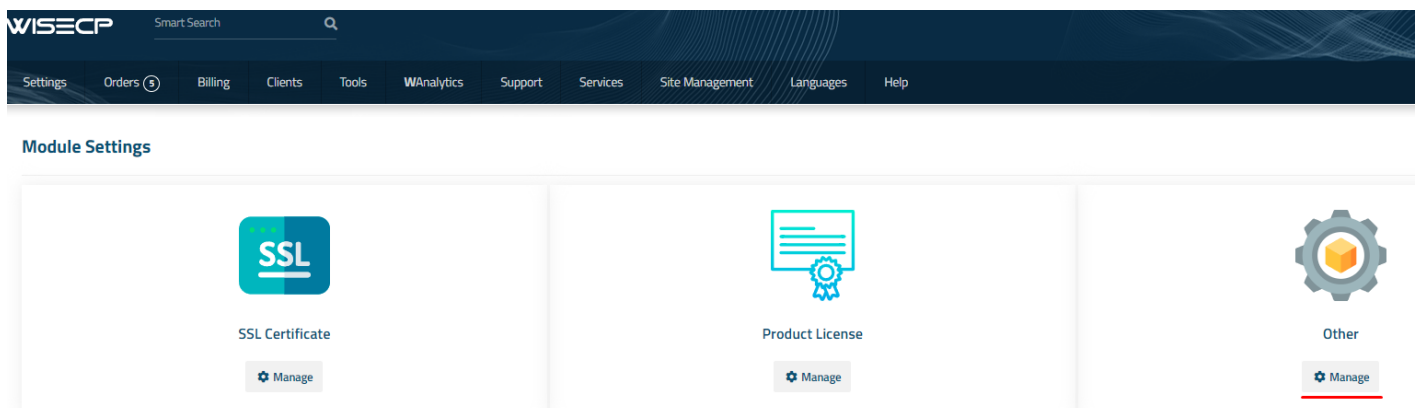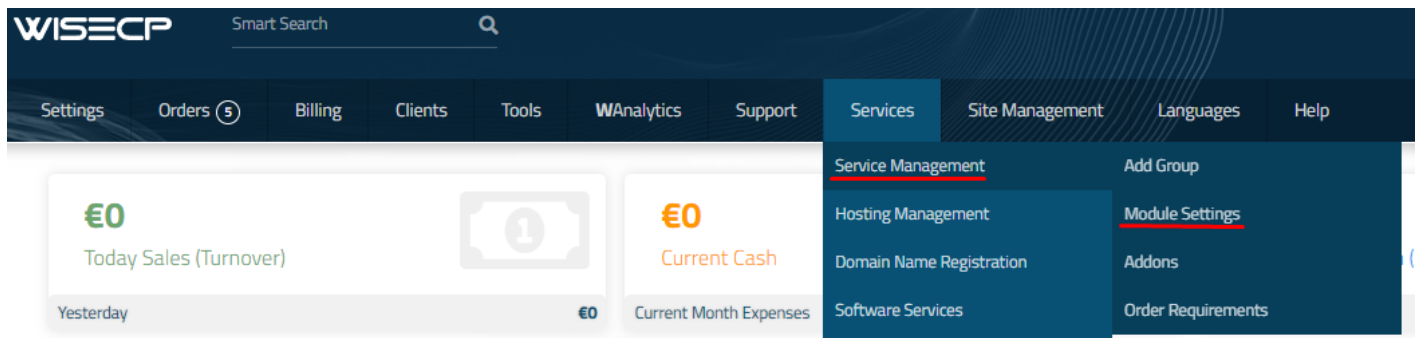

Other

- Initial Settings

All Modules

OtherDashboard / Module Settings / Other

- Initial Settings

All Modules

Search Within Modules

Write something...

- PUQ Nextcloud

3. In the opened page, click the 'Add Server' button.

OtherDashboard / Module Settings

- Initial Settings

All Modules

PUQ Nextcloud



License key

GDSFNX- -UZAPKG

2024-01-08T16:11:39+01:00

Check and Save

Version: 1.0

Web Site

Documentation

Changelog

- Add New Server

Server Groups

ServersNextcloud

10 Show Record

Search

#	Name	Status	Group	Default	IP/Domain	Usage Stats	
8	nextcloud-test.uuq.pl	active	Default	✓	nextcloud-test.uuq.pl	1/10	

Showing records from 1 to 1 - 1

Prev1Next


4. On the opened page, enter all the necessary information:

- **Name:** Displayed name of the server.
- **Maximum Number of Accounts:** The number of services that can be on this server.
- **Server Group:** Optionally, choose the server group.
- **IP Address or Domain:** The address of the Nextcloud server you are connecting to.
- **Username/Password:** Username and Password on the Nextcloud server.
- Check the **SSL** box if you want to use SSL-encrypted connection. If necessary, specify the port and perform a connection test.

Other

Dashboard / Module Settings / Other

Initial Settings
All Modules



### PUQ Nextcloud

[Go to Back](#)

#### Add New Server

Server Name	nextcloud-test.uuq.pl
Maximum Number of Accounts	112
Server Group	Default
Default	<input type="checkbox"/> Set as default server in group
IP Address or Domain	nextcloud-test.uuq.pl
Username	wiseadmin
Password	R
SSL	<input checked="" type="checkbox"/> Connect using SSL
Port	443 <input type="checkbox"/> Change standard port
Test Connection	<a href="#">Test Connection</a>

[Add New Server](#)

[Turn Back](#)

# Service/Product configuration

## Nextcloud module **WISECP**


[Order now](#) | [Download](#) | [FAQ](#)

If you do not have a **Service Group** where you want to place the new service, you need to create a new **Service Group**

1. Log in to the administrative area of your **WISECP**.
2. Create New Service Group

Go to


Services -> Service Management -> Add Group

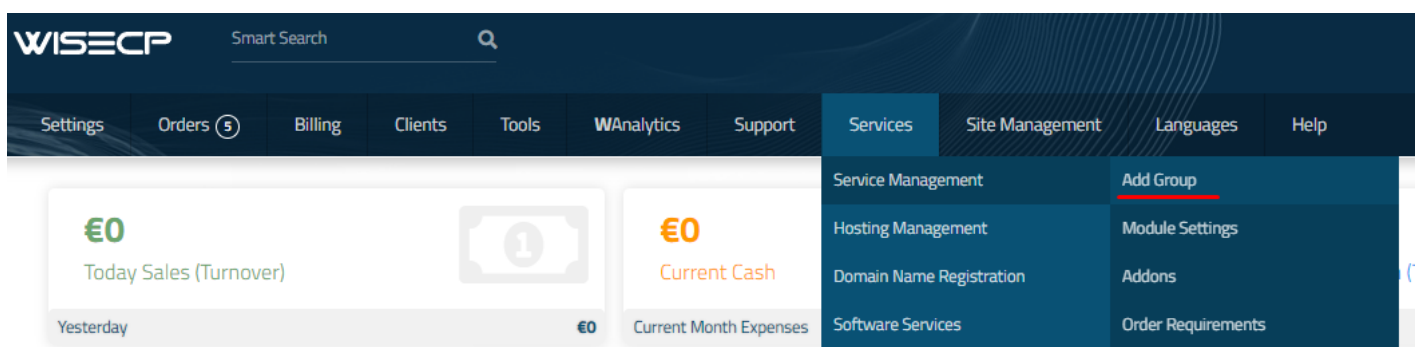

Enter all the necessary data and click the '**Create Group**' button.



WISECP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Create New Service Group  Dashboard / Create New Service Group

Create a new service group, you can also create new categories and manage the existing one from here.

EN UK RO PT PL NL LV KA IT ID HU FR FA ES EL DE CS BS AR

Title	Storage
Short Detail	Short Group Description
Listing Template	<input checked="" type="radio"/> Box List <input type="radio"/> Horizontal List
Status	Enable 
Background Image	
Group Colour	<input type="text" value="#FFFFFF"/>
Order Upgrades	<input type="checkbox"/> Allow clients to upgrade to higher package in the same service group
External HTML Code	Paste your HTML code to this field (Optional) <small>You can optionally add external HTML code and customize it. There should not be any incorrect or incomplete HTML codes, otherwise page structure will be empty</small>

### 3. Adding a New Service

Go to

Services -> our service group where you need to add the new service.

WISECP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Service Management  
Hosting Management  
Domain Name Registration  
Software Services  
International SMS Services  
Google SEO Services  
VPN  
Media  
Storage

€0 Today Sales (Turnover)  
Yesterday €0

€0 Current Cash  
Current Month Expense €0

0 Overdue Invoice (Total €0)

0 Payment Date (Total €0 / Last 7 Days)

0 Order in the (Total €0)

Recent Orders (Last 5)

In the opened window, click the '**Create New Service**' button.

## Storage

+ Create New Service

Categories

Service Group Settings

Apply to selected

10 Show Record

On the opened page, enter all the necessary details for your new service and navigate to the 'Core' tab.

Select the 'PUQ Nextcloud' module from the drop-down list of modules.

WISECP Smart Search

Settings Orders Billing Clients Tools WAnalytics Support Services Site Management Languages Help

Dashboard / Storage / Add Service Product

### Add Service Pack For Storage

Detail Core + Optional Addons Requirements Upgradeable Products Pricing

Module PUQ Nextcloud

Server Group Default (Servers: 1) Disk Limit 5 in GB

Group USER Username prefix Will be attached to the beginning of username. Only small letters and numbers and symbol "-"

Username suffix Will be appended to the end of username. Only small letters and numbers and symbol "-" Link to instruction https://\*\*\*\*\*.\*\*\*/ A link to the instruction will be reflected in the client area.

Automatic Setup ☒ Please activate for automatic installation of the order. Otherwise, administrator approval is required.

Create Product

## 4. Fill in the configuration options according to your preferences.

- **Server Group** is the group of servers from which a server will be chosen for provisioning the service
- **Disk Limit:** is the disk space quota that is issued to the user
- **Group:** is the group that will be assigned to the user
- **Username Prefix** will be added at the beginning of the username during user creation and is used for uniqueness
- **Username Suffix** will be added at the end of the username during user creation and is also used for uniqueness
- **Link to Instruction** Provide the link to the instruction for the service, and it will be displayed in the client area as a separate button
- **Link to VPN Clients** Provide the link to the page for downloading VPN clients for the service, and it will be displayed in the client area as a separate button
- **Automatic Setup** Please activate for automatic installation of the order. Otherwise,

administrator approval is required.

# Admin Area

# Order Detail

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

Navigate to the service you want to manage, then go to the '**Core**' tab.

### Nextcloud 10 GB Order Detail

[Dashboard](#) / [Orders](#) / Nextcloud 10 GB Order Detail

Detail

Core

Blocks

+ Order Addons

Requirements

Upgrade / Downgrade

History

Cancellation / Refund

API Module

PUQ Nextcloud

API answer OK

Display Name/Email	Status	Groups	Storage	Storage used	Storage free	Storage total
Ruslan Poloviyi ruslan.poloviyi@puq.pl	enabled	USER	/var/nc_data/wisecp-2-149-cloud	0.3651 GB (3.65%)	9.6349 GB (96.35%)	10 GB

Server

nextcloud-test.uuq.pl

Username

wisecp-2-149-cloud

Password

9CBZjIBFXNEI

Overwrite package settings

☐

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☐

To apply the changes on the server, it is necessary to check this checkbox.

Update

n the opened tab, you have a view of the online status of the service. The available online information includes:

- Connection status to the API
- Information about user account on the Nextcloud server
- Diagnostic information about the account

Also, below are fields with the client's personal data, such as Username, Password, Server

You can also individually override package options for the client by checking the 'Overwrite package settings' box.

API answer OK

Display Name/Email	Status	Groups	Storage	Storage used	Storage free	Storage total
Ruslan Poloviy ruslan.poloviy@puq.pl	enabled	USER	/var/nc_data/wisecp-2-149-cloud	0.3651 GB (3.65%)	9.6349 GB (96.35%)	10 GB

Server

nextcloud-test.uuq.pl

Username

wisecp-2-149-cloud

Password

9CBZjIBFXNEI

Server Group

Default (Servers: 1)

Disk Limit

10

in GB

Group

USER

Nextcloud group

Username prefix

wisecp-

Will be attached to the beginning of username. Only small letters and numbers and symbol "-"

Username suffix

-cloud

Will be appended to the end of username. Only small letters and numbers and symbol "-"

Link to instruction

https://puq.pl/

A link to the instruction will be reflected in the client area.

Overwrite package settings

☒

Overwriting the package settings is necessary to personalize the service if you need it.

Send changes to server

☒

To apply the changes on the server, it is necessary to check this checkbox.

Update

Note: When changing the Server Group, Server fields, make sure you have a user with the username as specified in the 'Username' field pre-created on the new server. Otherwise, you will need to recreate the service for your client.

# Client Area

# Product Home Screen

## Nextcloud module **WISECP**

[Order now](#) | [Download](#) | [FAQ](#)

### Available options in the client panel:

- Links in the form of buttons to the instruction
- Round graph of used disk space
- Server and account settings
- Ability to change the password for your account

Nextcloud 5 GB

Client Area / My Services / Storage / Nextcloud 5 GB


Details

Additional Services

Upgrade

Cancellation Request

Order ID #153



Renew Now

Used space (GB)

Free 500 (100%)

Free

General Information

Invoice #182

Service Group	Storage
Service Name	Nextcloud 5 GB
Services Status	Active
Payment Period	Monthly
Renewed On	17.01.2024
Next Due Date	24.02.2024
Amount : 23,84zł	

User manual

Storage used

0 GB (0%)

Storage free

500 GB (100%)

Storage total

500 GB

Web interface address

https://nextcloud-test.uuq.pl/

Username

wisecp-2-153-c1oud

Password

Generate

••••••••

Save