Image not found or type unknown

Configuration

Service Label Designer addon **WHMCS**

Order now | Download | FAQ

The Configuration page is available at: **Addons** > **PUQ Service Label Designer** > **Config**

Here you set default fallback values for template variables. When a service field is empty, the corresponding default value is used instead.

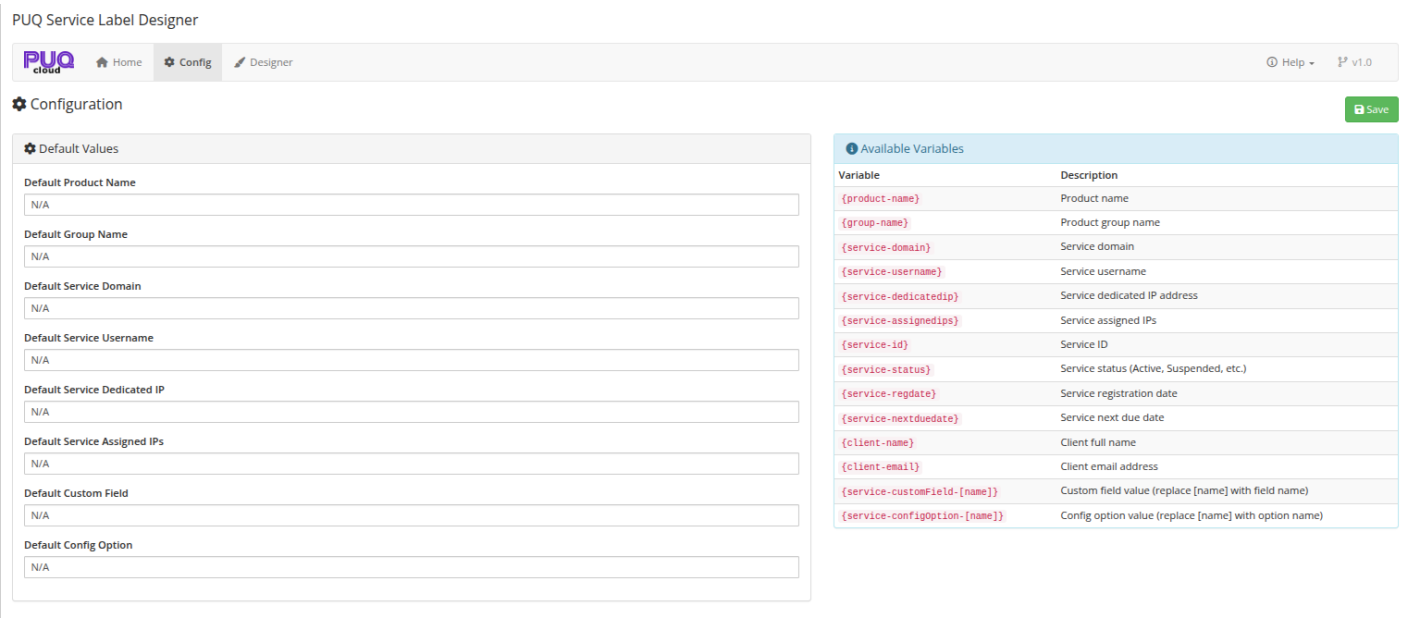

03-configuration.png

Default Values

The left panel contains input fields for each default value:

Setting	Description
Default Product Name	Fallback when a product has no name (rare)
Default Group Name	Fallback when a group has no name

Setting	Description
Default Service Domain	Shown when a service has no domain assigned
Default Service Username	Shown when a service has no username
Default Service Dedicated IP	Shown when a service has no dedicated IP
Default Service Assigned IPs	Shown when a service has no assigned IPs
Default Custom Field	Shown when a custom field value is empty
Default Config Option	Shown when a config option value is empty

> **Tip:** Set all defaults to `-` or `N/A` to avoid blank spaces in your rendered labels when service data is missing.

Available Variables

The right panel displays a reference table of all template variables you can use in the Designer:

Variable	Description
`{product-name}`	Product name
`{group-name}`	Product group name
`{service-domain}`	Service domain
`{service-username}`	Service username
`{service-dedicatedip}`	Service dedicated IP address
`{service-assignedips}`	Service assigned IPs
`{service-id}`	Service ID
`{service-status}`	Service status (Active, Suspended, etc.)
`{service-regdate}`	Service registration date
`{service-nextduedate}`	Service next due date
`{client-name}`	Client full name
`{client-email}`	Client email address
`{service-customField-[name]}`	Custom field value (replace `[name]` with the field name)
`{service-configOption-[name]}`	Config option value (replace `[name]` with the option name)

How Defaults Work

When a template is rendered, each variable is replaced with the actual service data. If the data is empty, the default value from this page is used instead.

Example:

Template: `{product-name} / {service-domain}`

- Service has domain `example.com` → **VPS Basic / example.com**
- Service has no domain, default is `N/A` → **VPS Basic / N/A**
- Service has no domain, default is empty → **VPS Basic /**

Revision #2
Created 15 February 2026 19:28:30 by Ruslan
Updated 15 February 2026 19:28:42 by Ruslan