
Server-Group Editor

PUQ Web Hosting module **WHMCS**

Order now | Download | Community

Open a group (Infrastructure → Server Groups → **Open**) to manage its members, its centrally-managed `hestia.conf`, its DNS cluster and (for vanity groups) its sellable domains. A standard group has these tabs: **Actions · General · All-servers config · Web config · Mail config · DNS config · Variables · Standard files · DNS servers**.

Actions — bulk apply per role

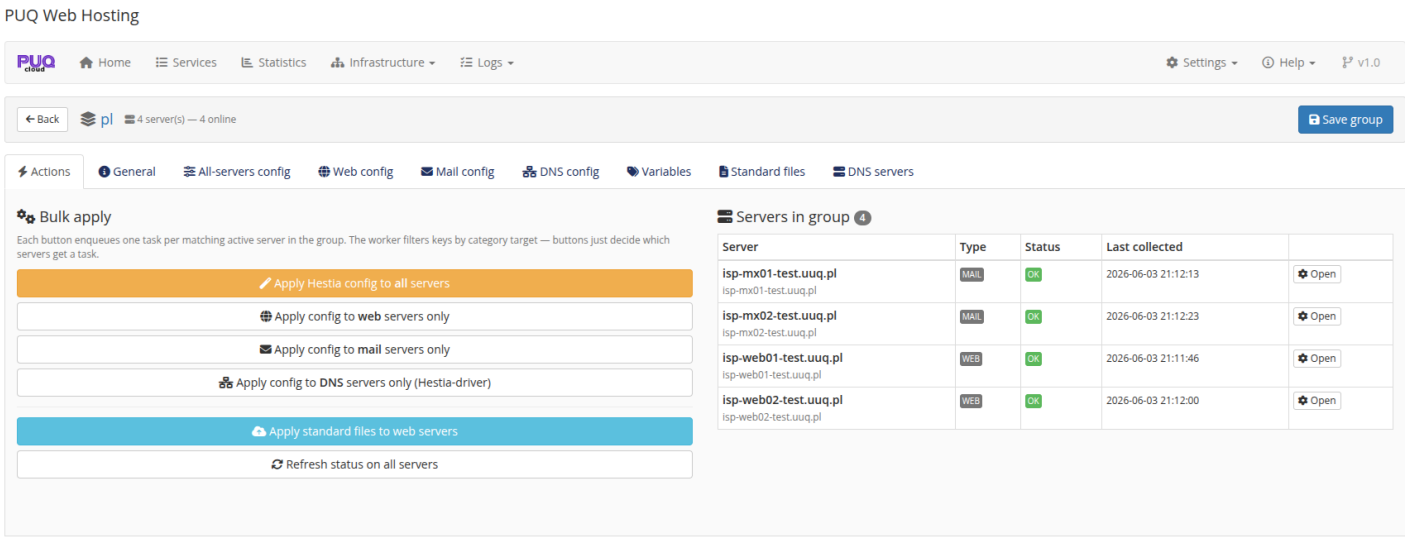

The Actions tab lists the members with their **Type** and **Status**, and pushes config/files **per role**: *Apply Hestia config to all / web only / mail only / DNS only*, *Apply standard files to web*, *Refresh status*. Applying enqueues one task per matching active node.

General — name & purpose


Name, description and the **Group purpose** (Standard vs Vanity). See **Server Groups** and the **Vanity Mode**

chapter.


Managed `hestia.conf` (role-targeted)

The module can centrally manage Hestia config keys and keep every node in sync (with drift detection on the node's *Group config* tab). The keys are split by role so they only ever land on the right tier:

- **All-servers config** — applied to every node (language, theme, security/API, user policies, plugins…).

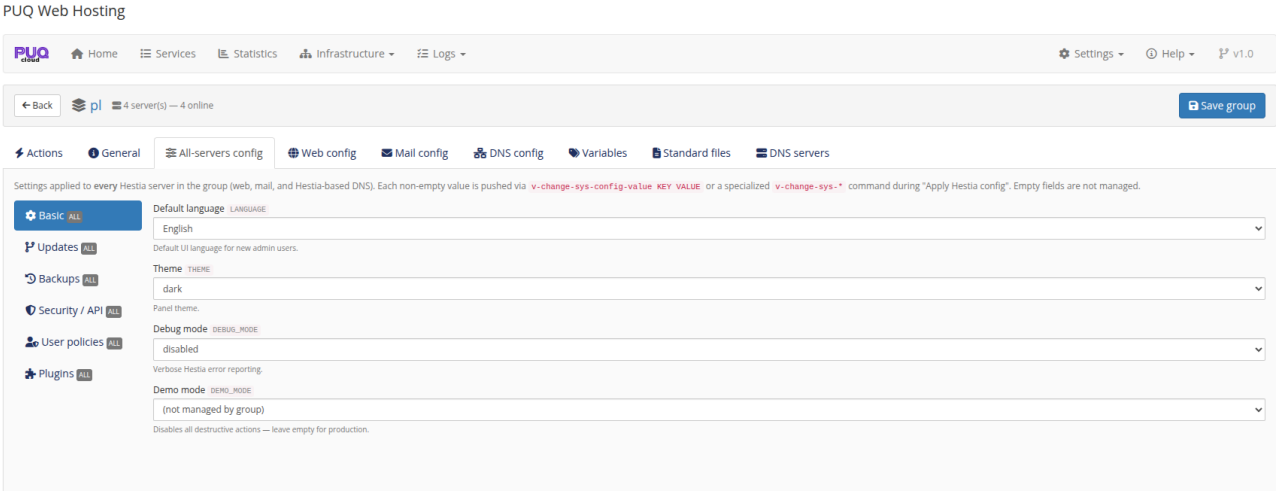


- **Web config** — web-only (Apache/SSL/Nginx ports, web backend, sync error pages/skeleton, phpMyAdmin/phpPgAdmin aliases).

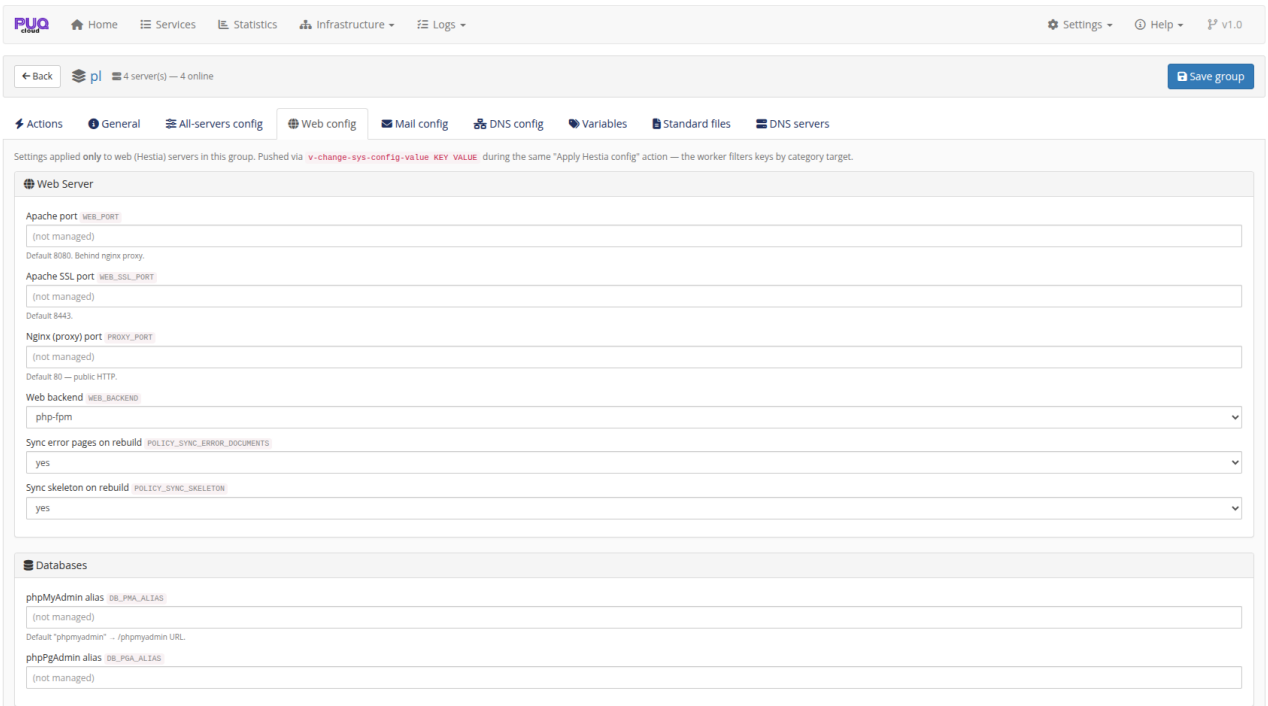


- **Mail config** — mail-only (SMTP/IMAP/Sieve systems, antispam/antivirus, webmail,

use-server-SMTP, notification from-address).

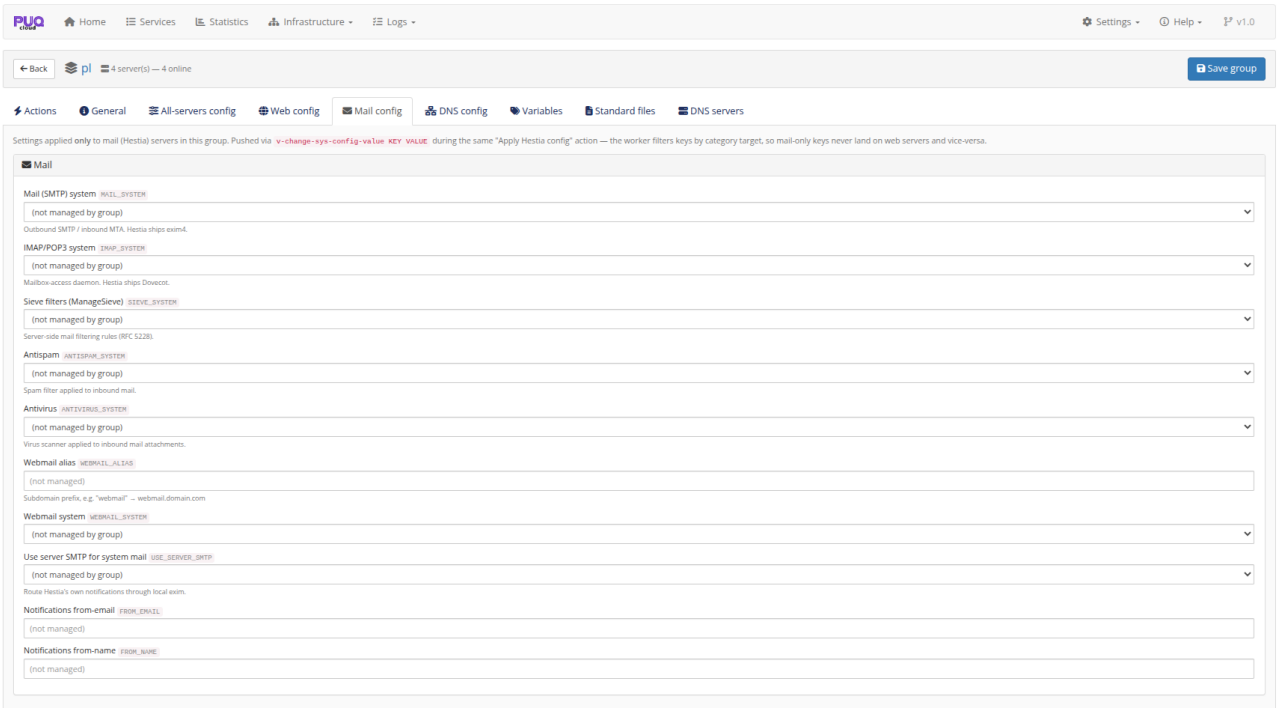


- **DNS config** — Hestia-DNS-only (DNSSEC, DNS cluster / remote NS list). PowerDNS nodes have no `hestia.conf` and are skipped.

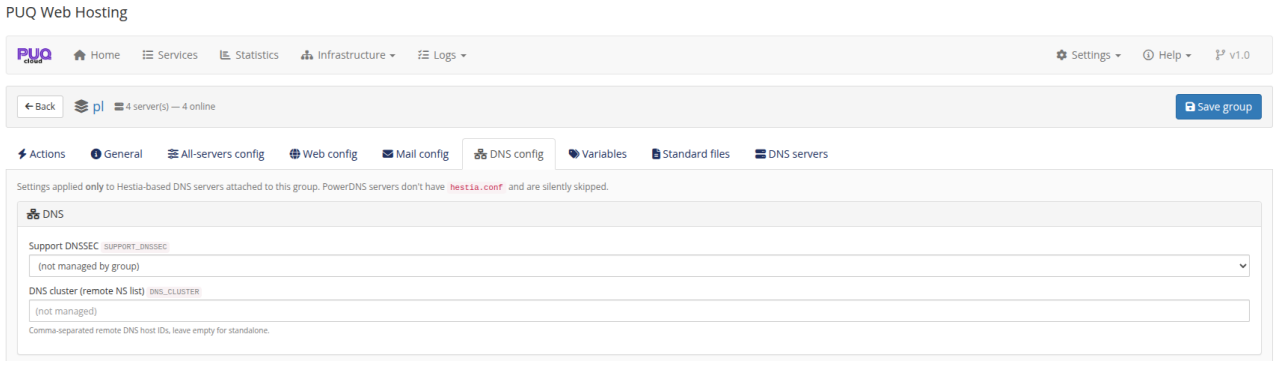

Empty fields are **not managed** — the module only pushes the keys you fill in.


Variables

Group-wide `{name}` key/value pairs substituted into DNS zone template records (e.g. `ns1`, `ns2`). Empty values fall through to the product's WHMCS configoptions; if both are empty the worker drops template records that reference the variable.

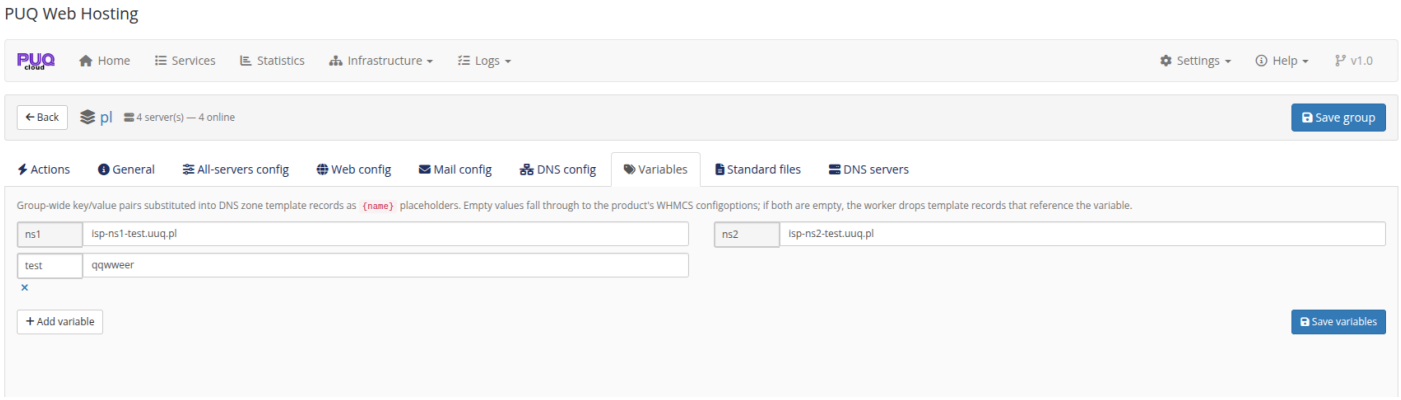


Standard files (rebranding)

Rebrandable Hestia skeleton files for **web** nodes — error pages (403/404/410/5xx), the default user `index.html` / `robots.txt`, the suspended-account page, and the unassigned-IP vhost. Each can be **Overridden** (your content) or **Pulled** from a server, with default/overridden badges.

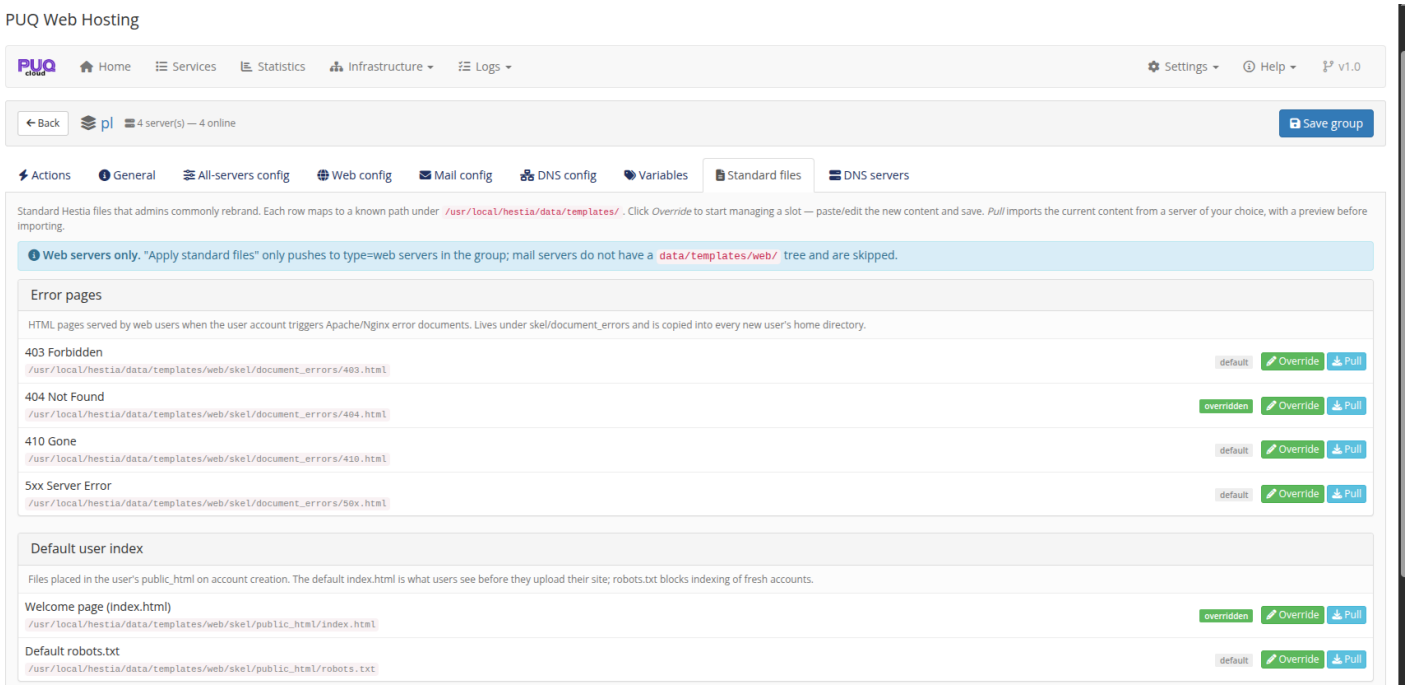

DNS servers (the cluster)

Attach independent DNS servers to the group (active-active replication) and set the group's default zone template + SOA defaults.

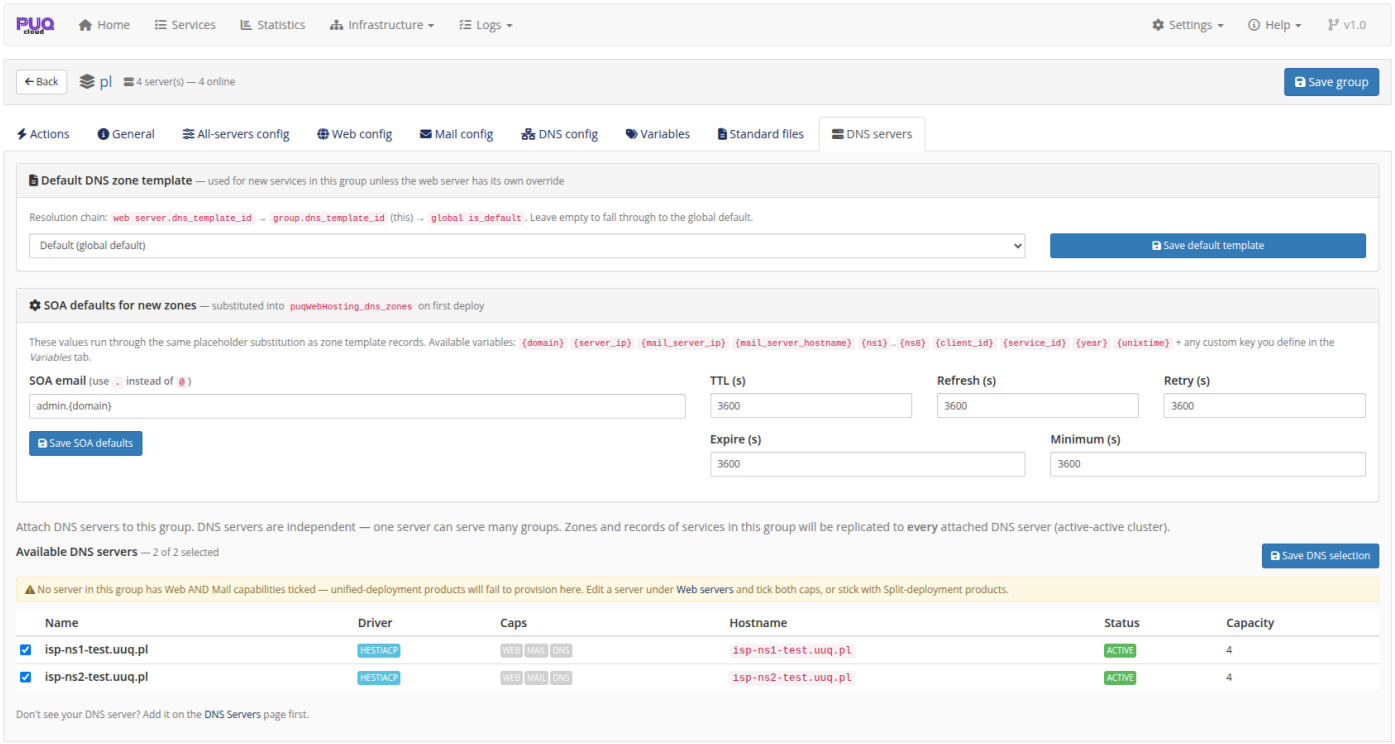

> A **Vanity** group shows only General / Variables / DNS servers / **Vanity domains** — the hosting-config tabs are hidden. See **Vanity Mode → Setting up the vanity group**.

Revision #8
Created 4 June 2026 15:10:16 by Ruslan
Updated 7 June 2026 20:54:08 by Ruslan